


Axon Body Workforce Camera



QUICK
START
GUIDE

For detailed user guides, video walk-throughs, and training, go to <https://my.axon.com/s/axon-body-workforce> (QR code above).

Camera controls

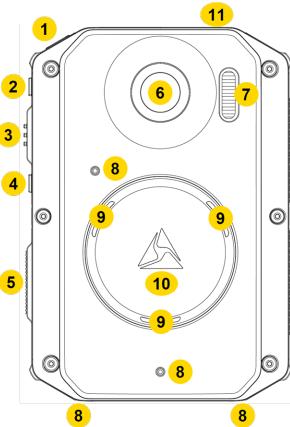

1. Power
2. Volume up
3. Select
4. Volume down
5. Program
6. Lens
7. Speaker
8. Microphone (4)
9. Triad LED (3)
10. Event
11. Operation LED (top)

Docking

Place your camera in your Axon Dock to charge the battery, offload videos, and download system updates. Ensure the USB port is dry and free of dirt and debris before placing the camera in a dock or connecting a USB-C cable.

Battery

Depending on organization settings, your camera may only charge to 90% and display **Full** to preserve battery health; this is not an error.

Water

Your camera is resistant to water splashes but is not immersible. While it can handle exposure to rain, avoid downpours. Treat it with the same care you would use with any expensive electronic device.

Button actions

Action	Button Presses
Lights	Press Volume Up ▲ for three second, then tap to toggle modes
Marker, add	Press Select while recording
Menu	Press Program and Power simultaneously
Mute on/off	Press Select for three seconds while recording
Pairing	Press Event + Program simultaneously
Power off	Press Power for three seconds
Power on	Press Power until short vibration
Recording, start	Double-press Event
Recording, stop	Press Event for three seconds
Sleep mode, enter	Press Power then Select to confirm
Sleep mode, exit	Press Power or start a recording
Stealth mode, enter	Press Volume Down for three seconds*
Stealth mode, exit	Press Volume Up ▲ or Volume Down ▼ for three seconds*
Volume, speaker	Press Volume Up ▲ or Volume Down ▼

* The camera remembers the previous volume and light settings when exiting Stealth mode.

Typical use


1. Ensure the Operation LED on top is green  when you remove it from the dock, indicating a full charge.
2. If needed, press **Power** to turn it on. The Operation LED on top flashes green  when it's ready to record.
3. Press **Event** twice to start recording; this may include a preceding segment of buffered time as set by your admin. The Operation and Triad LEDs will flash red .
4. Press **Event** for three seconds to stop recording.
5. At the end of your day, don't turn the camera off, just return it to any open bay to charge, upload recordings, and download updates.

Important: Your camera will only work at your company. Internal recordings are encrypted and can't be modified or accessed by USB cable.



AXON, Axon, and Axon Body are trademarks of Axon Enterprise, Inc., some of which are registered in the US and other countries. For more information, visit www.axon.com/legal. All other trademarks are property of their respective owners. All rights reserved. ©2025 Axon Enterprise, Inc., MPC0377 rev 07 Apr 2025

Icons during use

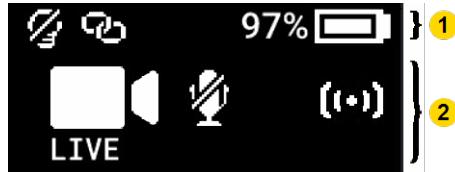

1. Status Bar
2. Activity Area

Status Bar Icon	Description
58%	Battery capacity
	Battery charging
	Battery low ($\leq 10\%$)
	Camera paired
	Lights off
	Stealth mode on

Activity Area Icon	Description	Operation LED
	Axon Respond Livestreaming*	
LOW STORAGE	Memory is 85% full	
STORAGE FULL	Memory is 95% full; recording stops	
	Microphone off (mute mode)	
PAIRING	Pairing mode*	
READY	Ready (Buffering) mode	
	Recording	
	Recording started by Axon Signal* broadcast	
	Sleep mode*	Off
n/a	Startup or shutdown	

* May not be enabled at your organization.

Icons when docked

Display	Description	Triad LED
58% 	Battery capacity	
	Battery charging – Triad LED colors reflect the charge level.	 Green: > 90%  Yellow: 11-89%  Red: <10%
	Battery optimized charging – Charge level is reduced to protect battery health during extended time in dock.	Same as normal charging above
DEVICE ERROR #	Device error #. Refer to the common codes in the user guide.	 Blinking red
NETWORK ERROR	Network error – Check network connection, see device page in Axon Evidence and troubleshooting instructions at help.axon.com .	 Blinking red and green
	Updating firmware or settings – Camera will resume normal operation after update. Operation LED solid white. Display may also show UPDATING.	 Spinning white
USERID123	User/Badge ID – Displays right after docking, when the camera is charging, for 10 seconds after undocking, and when no other activity is in progress.	n/a
UPLOADING	Uploading – In progress; also shows the number being updated and total, such as 1/5.	 Spinning yellow