



Composition®

Data Sheet

Product Overview

Composition® is a durable, high-performance acoustic wallcovering designed as a paint or wallpaper alternative. Made from 100% polyester fiber, Composition enhances interior acoustics and features a pinnable, self-healing surface ideal for creative and learning spaces. Composition is available in 38 colors and a velour finish.

Sustainable Material

- Carbon neutral product
- Zero carbon manufacturing
- Recycled content
 - >49% recycled material
- Low VOC and CDPH compliant
 - <0.0035 mg/m³ (7 days)
- Zero waste manufacturing initiative
- Sustainable supply chain and anti-modern slavery

Environmental Credentials

- EPD – compliant with ISO 14025 and EN 15804
- Declare – Red List free (third party verified)
- ISO 14001 Certified Environmental Management
- Health Product Declaration
- CDPH Standard



Certifying your Green Building

Autex Acoustics® products meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project. For support and guidance on available rating system points please visit momentumco.com, or speak with your Momentum account manager.

Specification

(Wall) treatment shall be Composition from non-woven needle-punched polyester containing no less than 49% recycled material as manufactured by Autex Acoustics.

Panel 04" - 0.5" (nom.), depth, color (), sound absorption: NRC 0.40. Fire rating ASTM E-84: Class A FS:5 - SD:25.

Roll 0.4" - 0.5" (nom.) depth, color (), sound absorption: NRC 0.40. Fire ratings: ASTM E-84: Class A.

Install as per Autex Acoustics recommendations. If Composition is to be specified for use other than as a wallcovering, please seek guidance from your Momentum account manager.



Product Specifications

Product Name	Composition*
Composition	100% polyester fiber (PET)
Finishes	Velour
Panel Dimensions	47.25" x 110"
Tolerance	(+0.2") x (+0.4")
Thickness	0.4" - 0.5"
Weight	5.51oz/ft ²

Product Name	Composition*
Composition	100% polyester fiber (PET)
Finishes	Velour
Roll Dimensions	4' x 36'
Tolerance	(+0.2") x (+0.4")
Thickness	0.4" - 0.5"
Weight	5.51oz/ft ²

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available at momentumco.com. If Composition is to be specified for use other than as a wallcovering, please seek guidance from your Momentum account manager.

Acoustic Performance

Composition is specifically designed to reduce and control reverberated noise and echo in building interiors. See more details in acoustic performance section on page 3 of this document.

Product Specifications

Fire Ratings

Composition has been evaluated using the following test methods:

ASTM E84 - 14

Class A, FS:5 - SD:25
Report RJ3297

Water Vapor Sorption

ASTM C1104 / C1104M-13a
Test conditions: 49°C, 95%RH
Water vapor absorbed and adsorbed after
4 days: 0.4% by weight

Impact Resistance

ISO 7892:1988

Hard Body Impact

There is no surface damage or penetration to Composition when subjected to hard body impacts. When adhered to 10 mm plasterboard, the system can resist a 9 joule impact. This is equivalent to the impact of a 0.5 kg object dropped from a 2 m height. A small indentation might be observed when subjected to an impact equivalent to the impact of a 0.5 kg object dropped from a 0.5 m height.

Soft Body Impact

There is no surface damage or penetration to Composition when subjected to soft body impacts. When adhered to 10 mm plasterboard, the system can resist a 70 joule impact. This is equivalent to the impact of a 50 kg object dropped from a 150 mm height.

Microbial Resistance

ASTM G21-15
Growth rating: 0 (No growth)
Composition does not promote the growth of molds and mildew.

Color Fastness to Light

Composition is suitable for indoor use only. Light fastness is dependent on use and exposure. Composition has been evaluated to the following standard: ISO 105-B02:2014
Rating: 6 (Highest = 7)

Color Fastness to Rubbing

ISO 105-X12:2016
Dry rating: 4-5 (Highest = 5)
Wet rating: 4-5 (Highest = 5)

Moisture Absorption

Polyester fiber when exposed to an atmosphere of 50°C at 90% relative humidity for four days showed moisture absorption of less than 0.03% by weight. Polyester is not affected by moisture and will not rot or deteriorate in intended use situations.

Fabric Care

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean dry cloth after each application of solution.

Refer to the Autex Acoustics Care and Maintenance Guide for more information.

Pattern Repeat

Non-woven. No pattern repeat but product has directional grain. Product may vary from samples and batch to batch due to fiber blending and lay-up, which is an inherent feature of this product.

Service

For further information about Composition or any other Autex Acoustics product, please contact your Momentum account manager or visit momentumco.com.



Acoustic Performance


Composition is specifically designed to reduce and control reverberated noise and echo in building interiors

Noise reduction coefficient 0.40.

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
0.4" - 0.5" Composition	0.00	0.10	0.25	0.55	0.75	0.85	0.40

Table presents the practical sound absorption coefficients as according to ISO 11654. Graph presents third octave sound absorption coefficients (According to ISO 354 measurement of sound absorption in a reverberation room.) The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz, and 2000 Hz, and rounded to the nearest 0.05.

Sound absorption coefficients according to ISO 354.
University of Auckland Testing Service
Composition (0.5") - Test No. T2114-8.

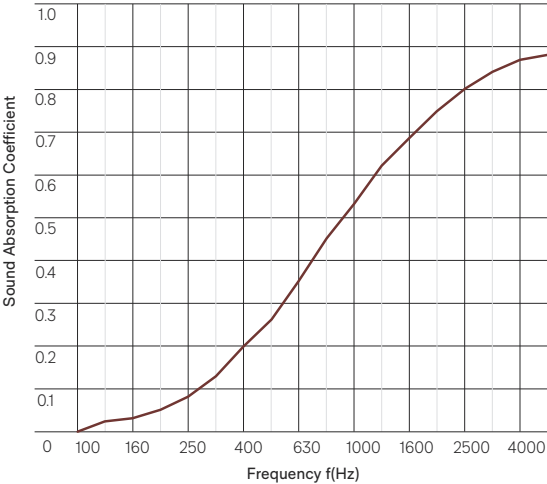

Light Reflectance Values by Color

Composition is suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Acros	30	Lime	29
Atlantis	8	Muralla	7
Beehive	30	Myst	42
Blazing Red	8	Octane	5
Calypso	13	Opera	47
Canyon	14	Parthenon	28
Caspian	3	Petronas	1
Cavalier	10	Pinnacle	2
Chilli Red	5	Porcelain	22
Electric Blue	12	Sage	9
Empire	3	Sargazo	2
Falling Water	32	Savoye	44
Flatiron	23	Senado	45
Gherkin	5	Simba	18
Granny Smith	20	Spearmint	13
Highland	14	Stonewash	19
Ink	3	Terrace	18
Jade	22	Tree House	2
Koala	12	Vintage	6

Autex Acoustics®

M O M E N T U M

momentumco.com

Instagram LinkedIn Pinterest