

Specification Guide

Inspired by the way light and shadow animate shape, Verve™ moulds static surfaces into sculptural features. Whether rounded or angular, organic or linear, each profile has a unique cross-sectional rhythm—revealing a new perspective with every step.

Six unique patterns are available across the full Cube™ colour palette and selected Surface Finishes.

A collection where each contoured panel brings a visual language that shapes your surroundings, blending acoustic performance with expressive design.



In everything we do



Verve™ Contoured Panels






Path to Specification


1. Space

What are the dimensions of the space you are designing?




2. Size

What panel dimensions are available?




3. Style

What styles are available?




4. Detail Considerations

What install details should I consider?




5. Colours and Finishes

What colours and finishing options are available?



6. Technical Information

What are the technical specifications?





Quick Reference

Panel Dimensions



Width	1170mm
Height	2400mm, 2700mm (standard) 3000mm (MOQs apply)
Thickness	12mm

Please contact your Autex Acoustics® account manager for more information.


Connection Method

Adhesive	Panels can be installed with appropriate adhesive (supplied by contractor)
----------	--

See Product Installation Guide for further details.

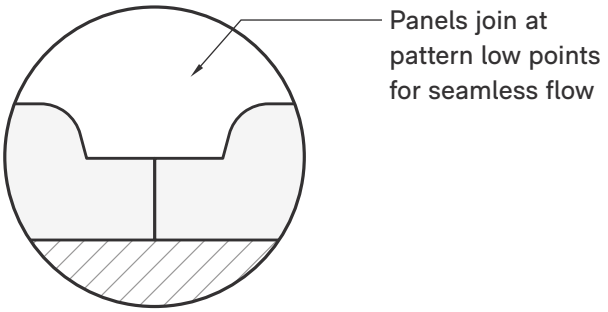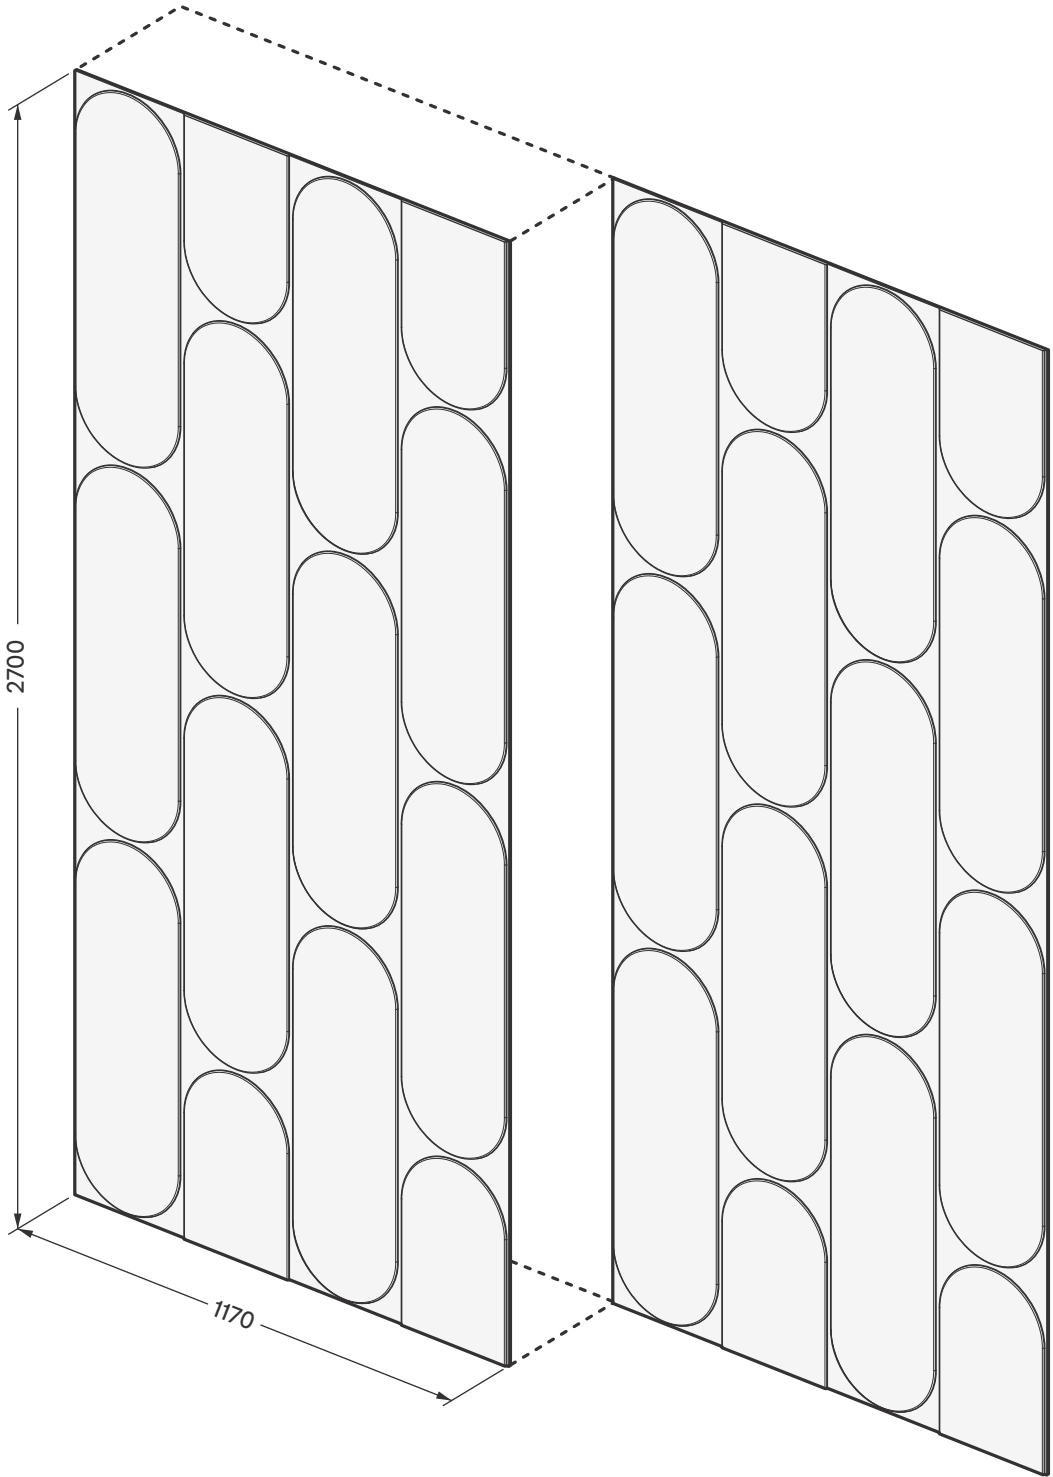

Edge Detail

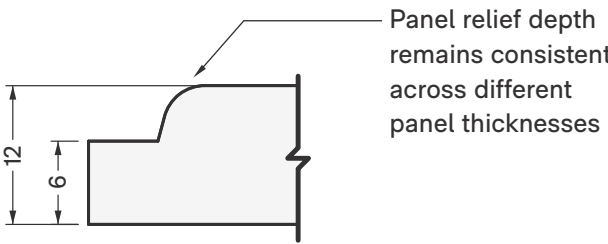


12mm Thickness
(6mm Edge Thickness)




Styles Overview


Pillar

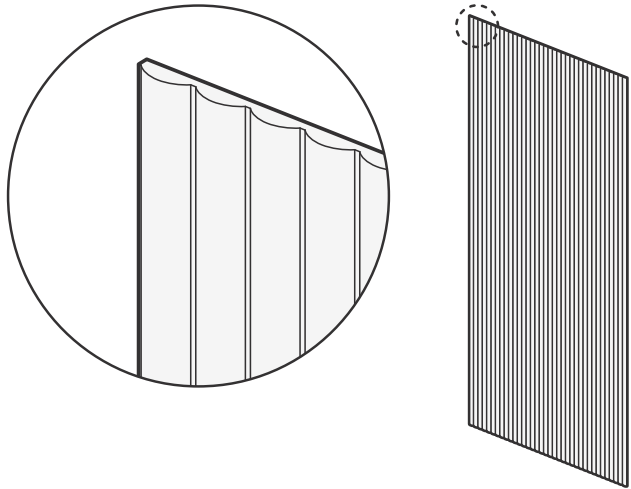


Pinstripe

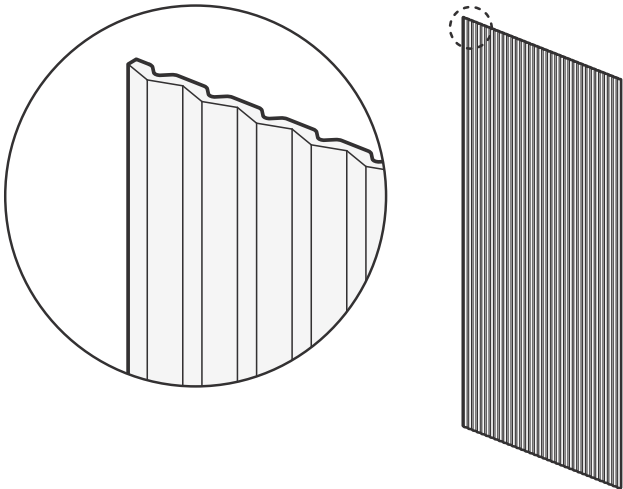


Ridge

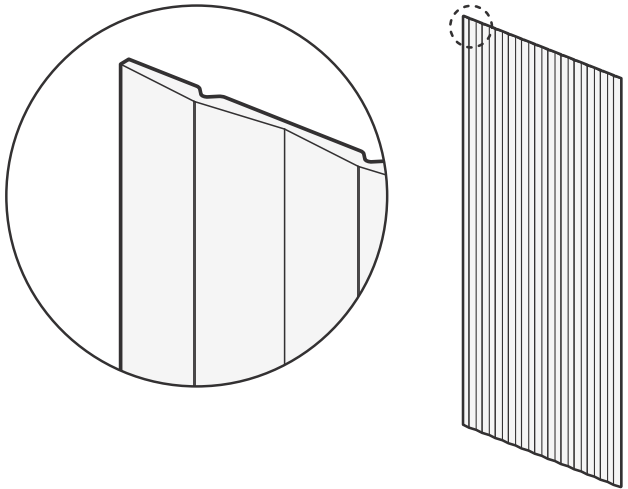


Flute

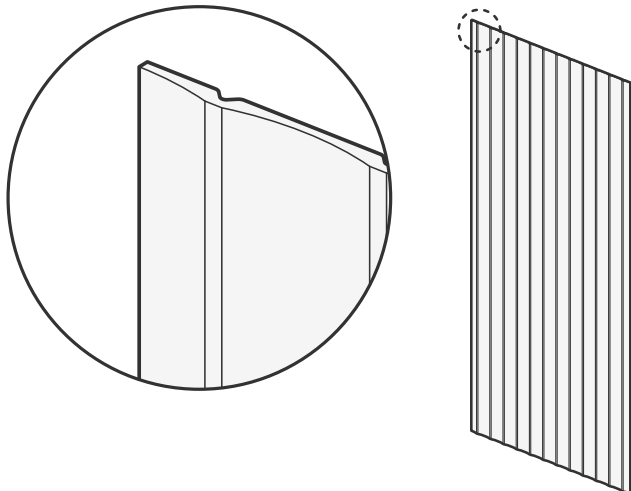

Windswept

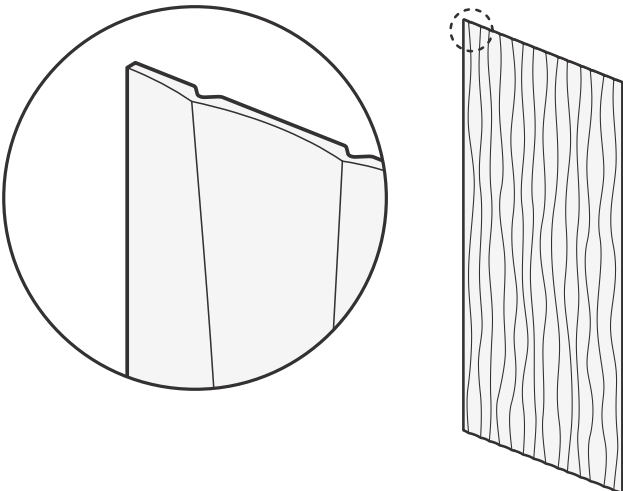

Ovolo

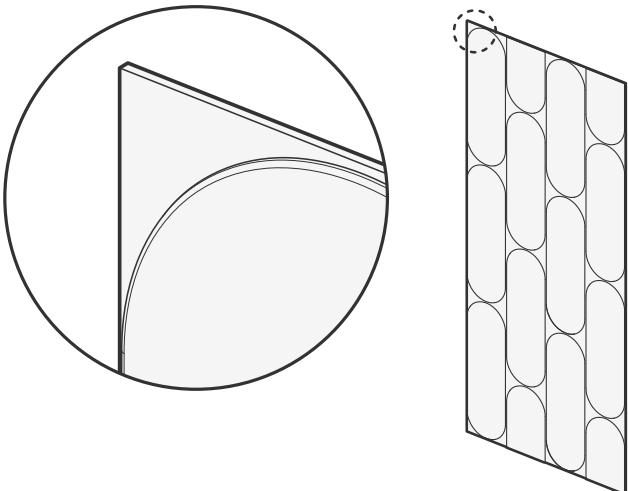





Pillar

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

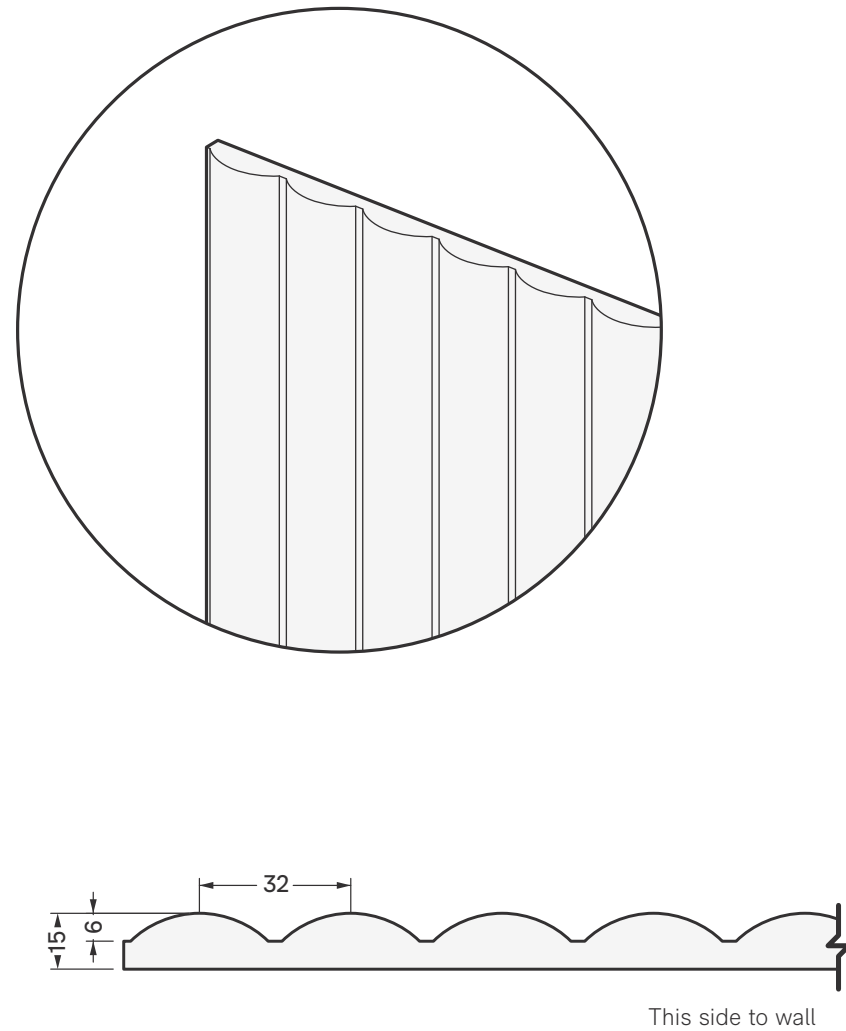

Layout Overview

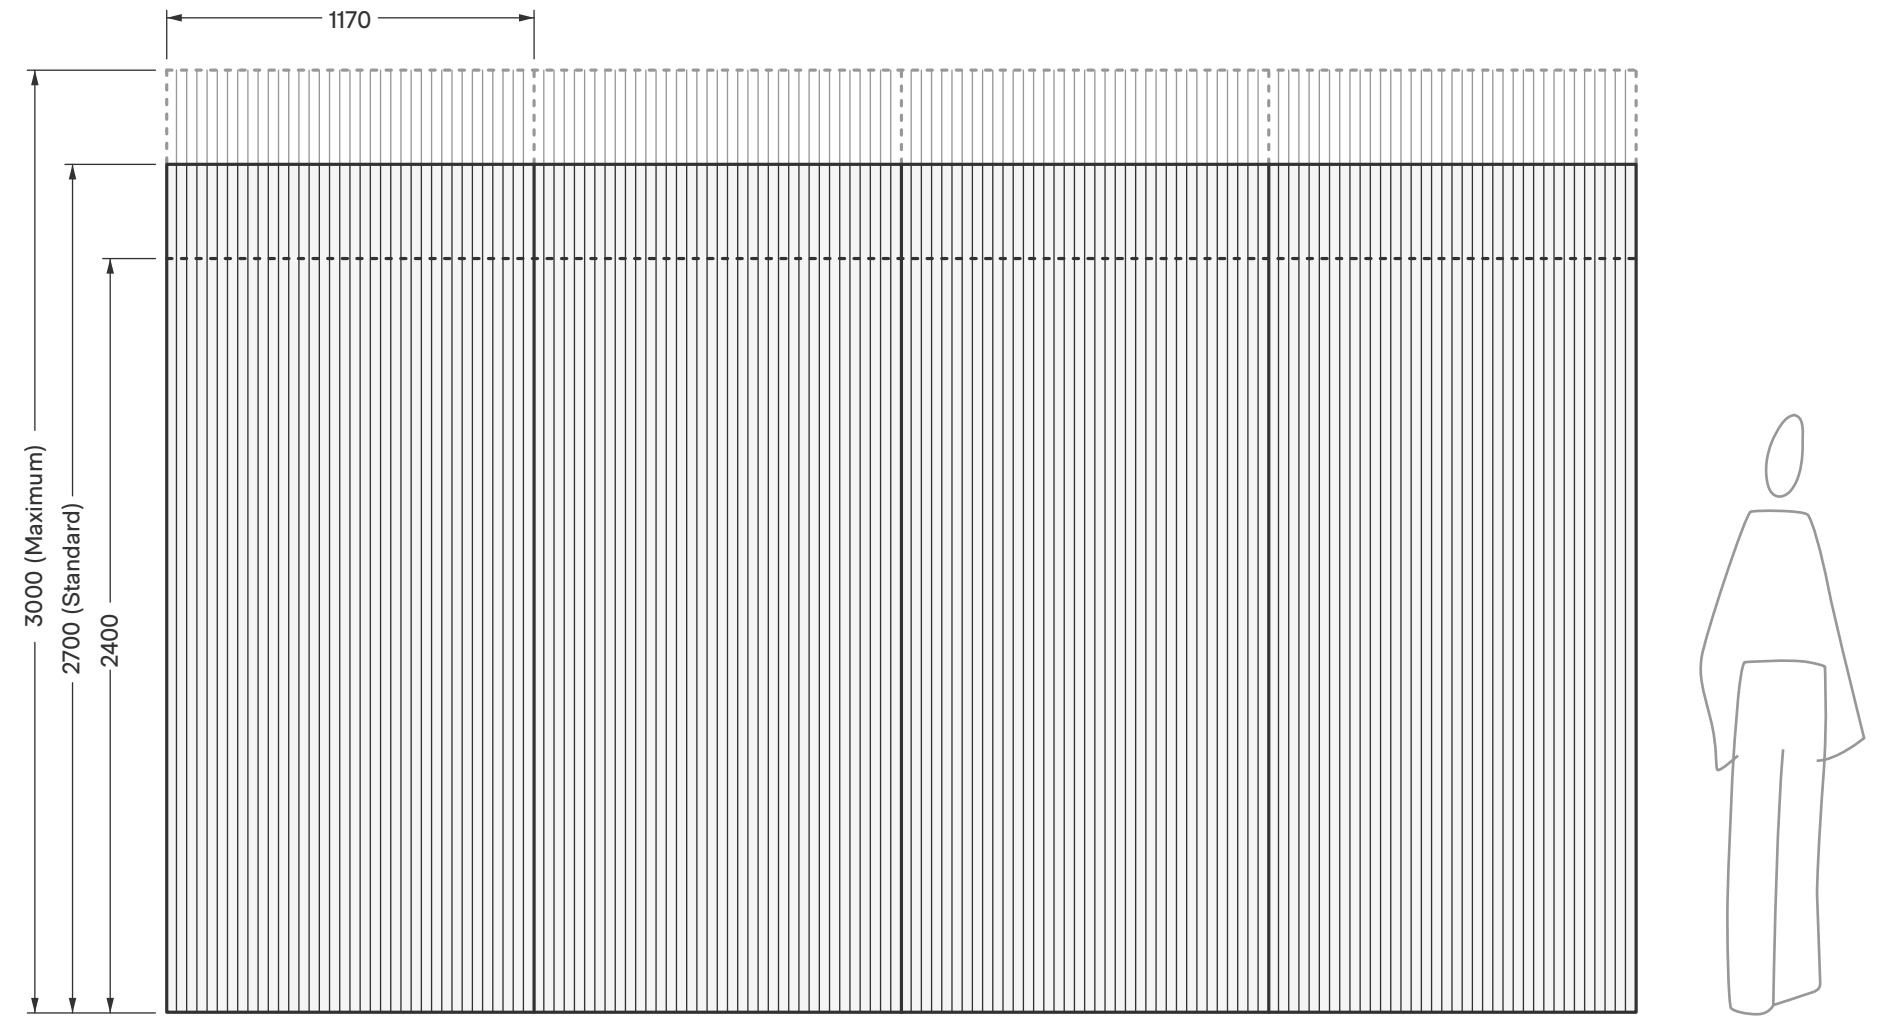





Pinstripe

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

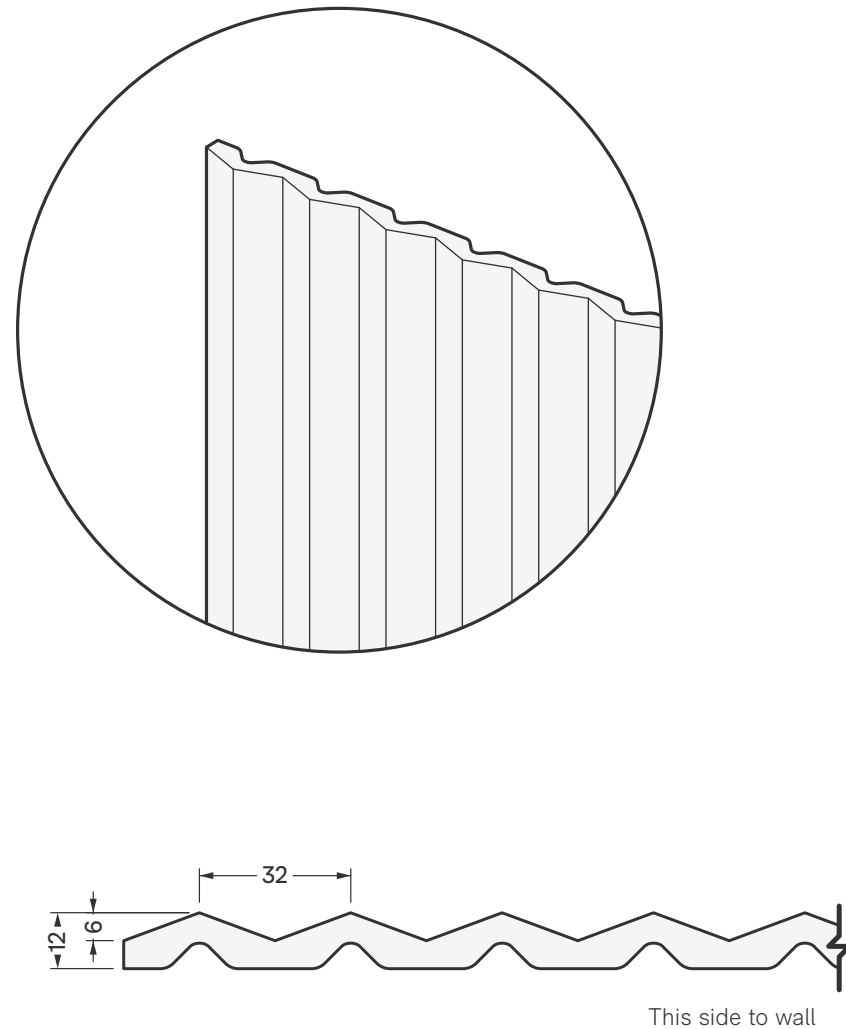

Layout Overview

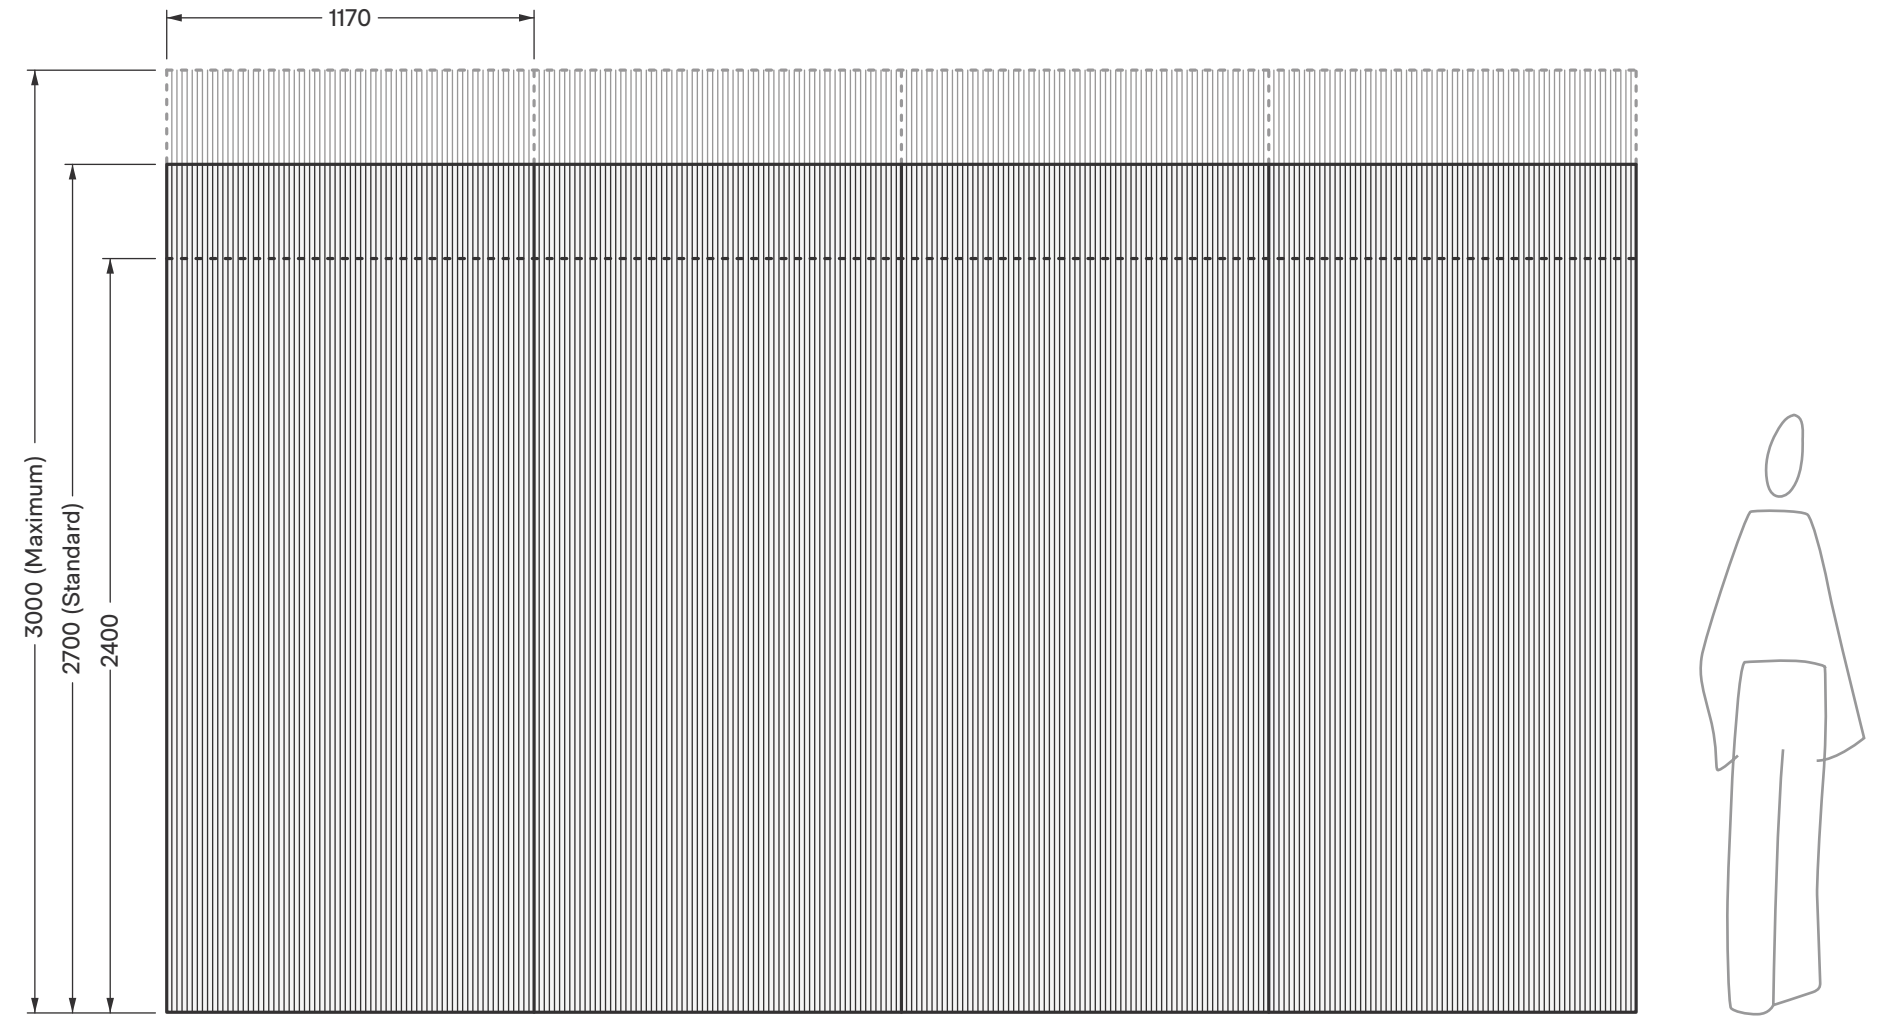





Ridge

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

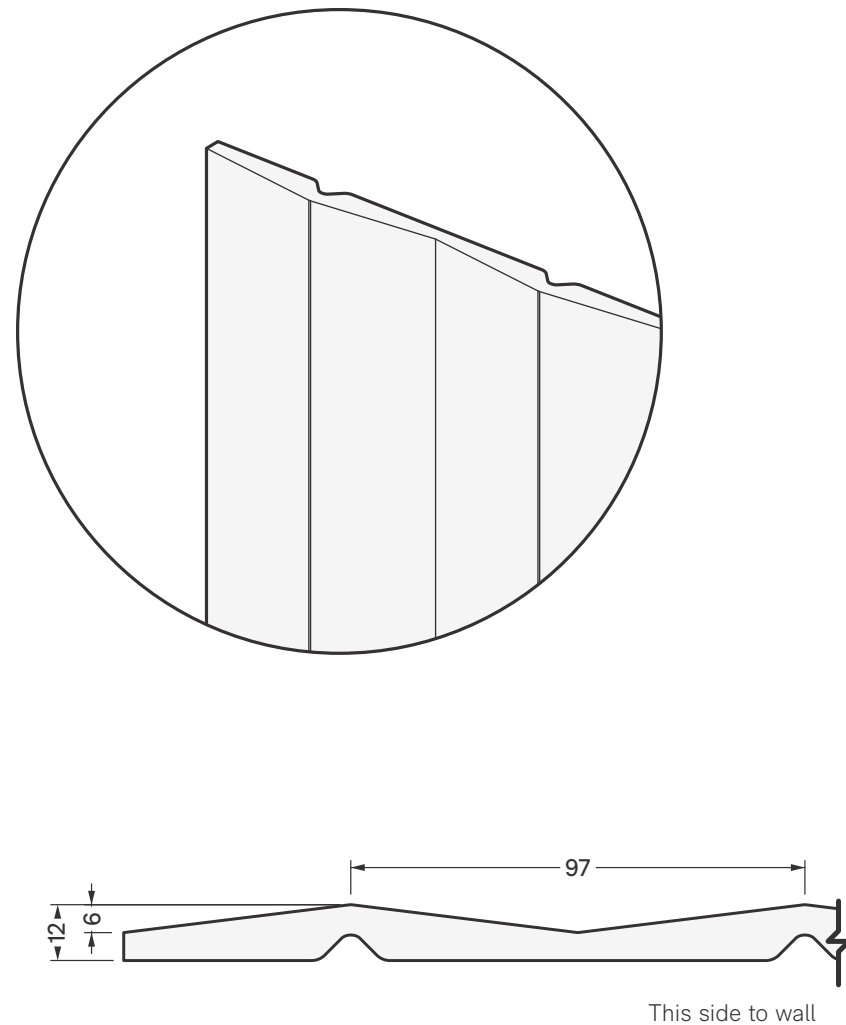

Layout Overview

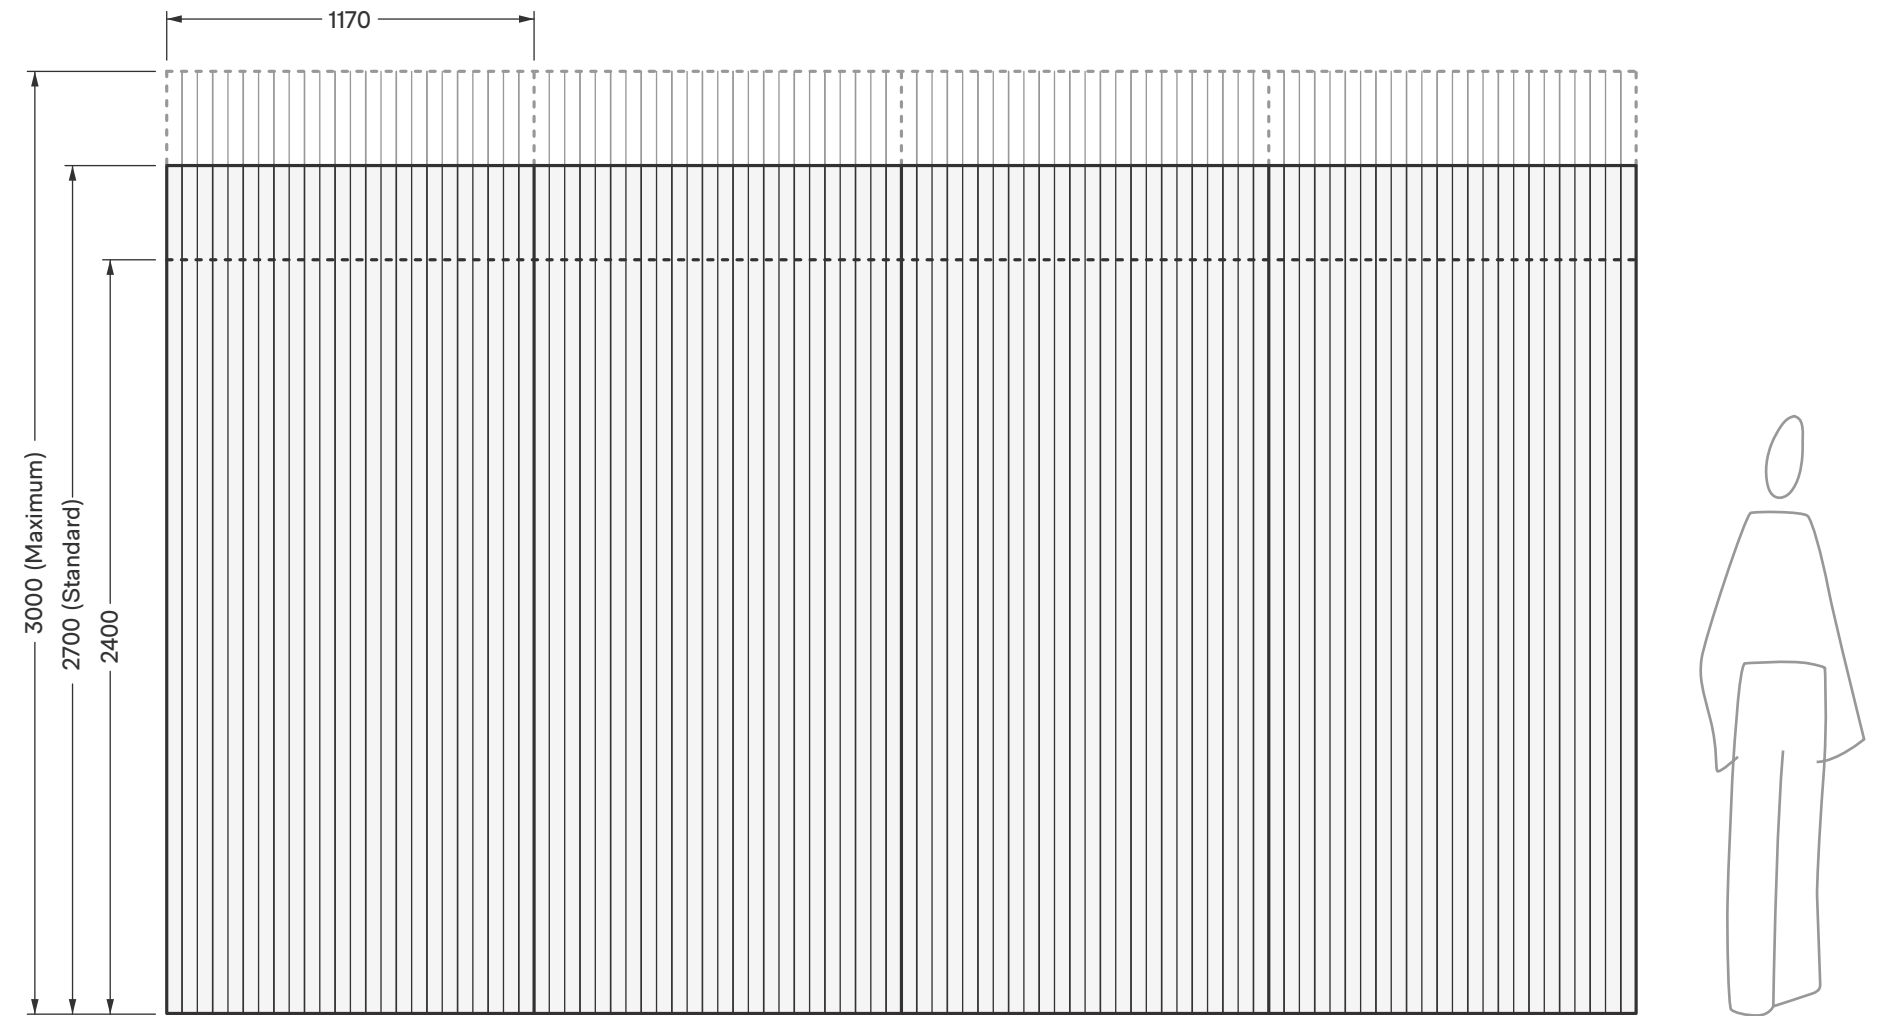





Flute

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

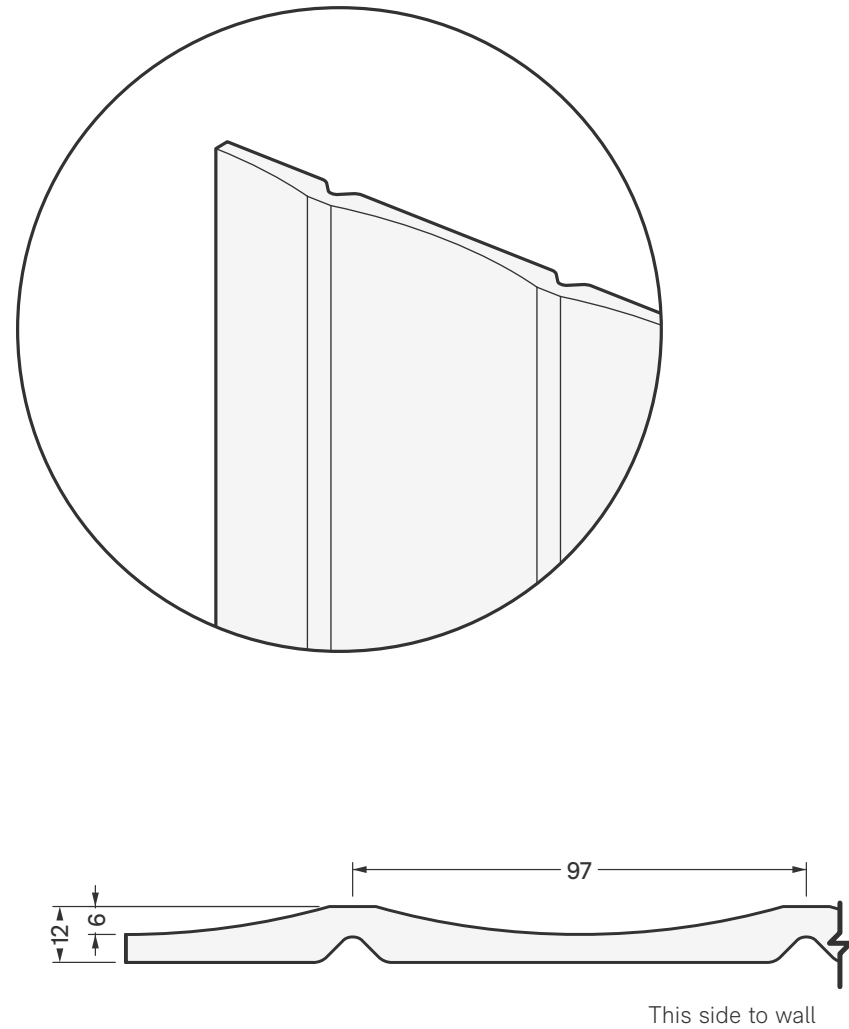

Layout Overview

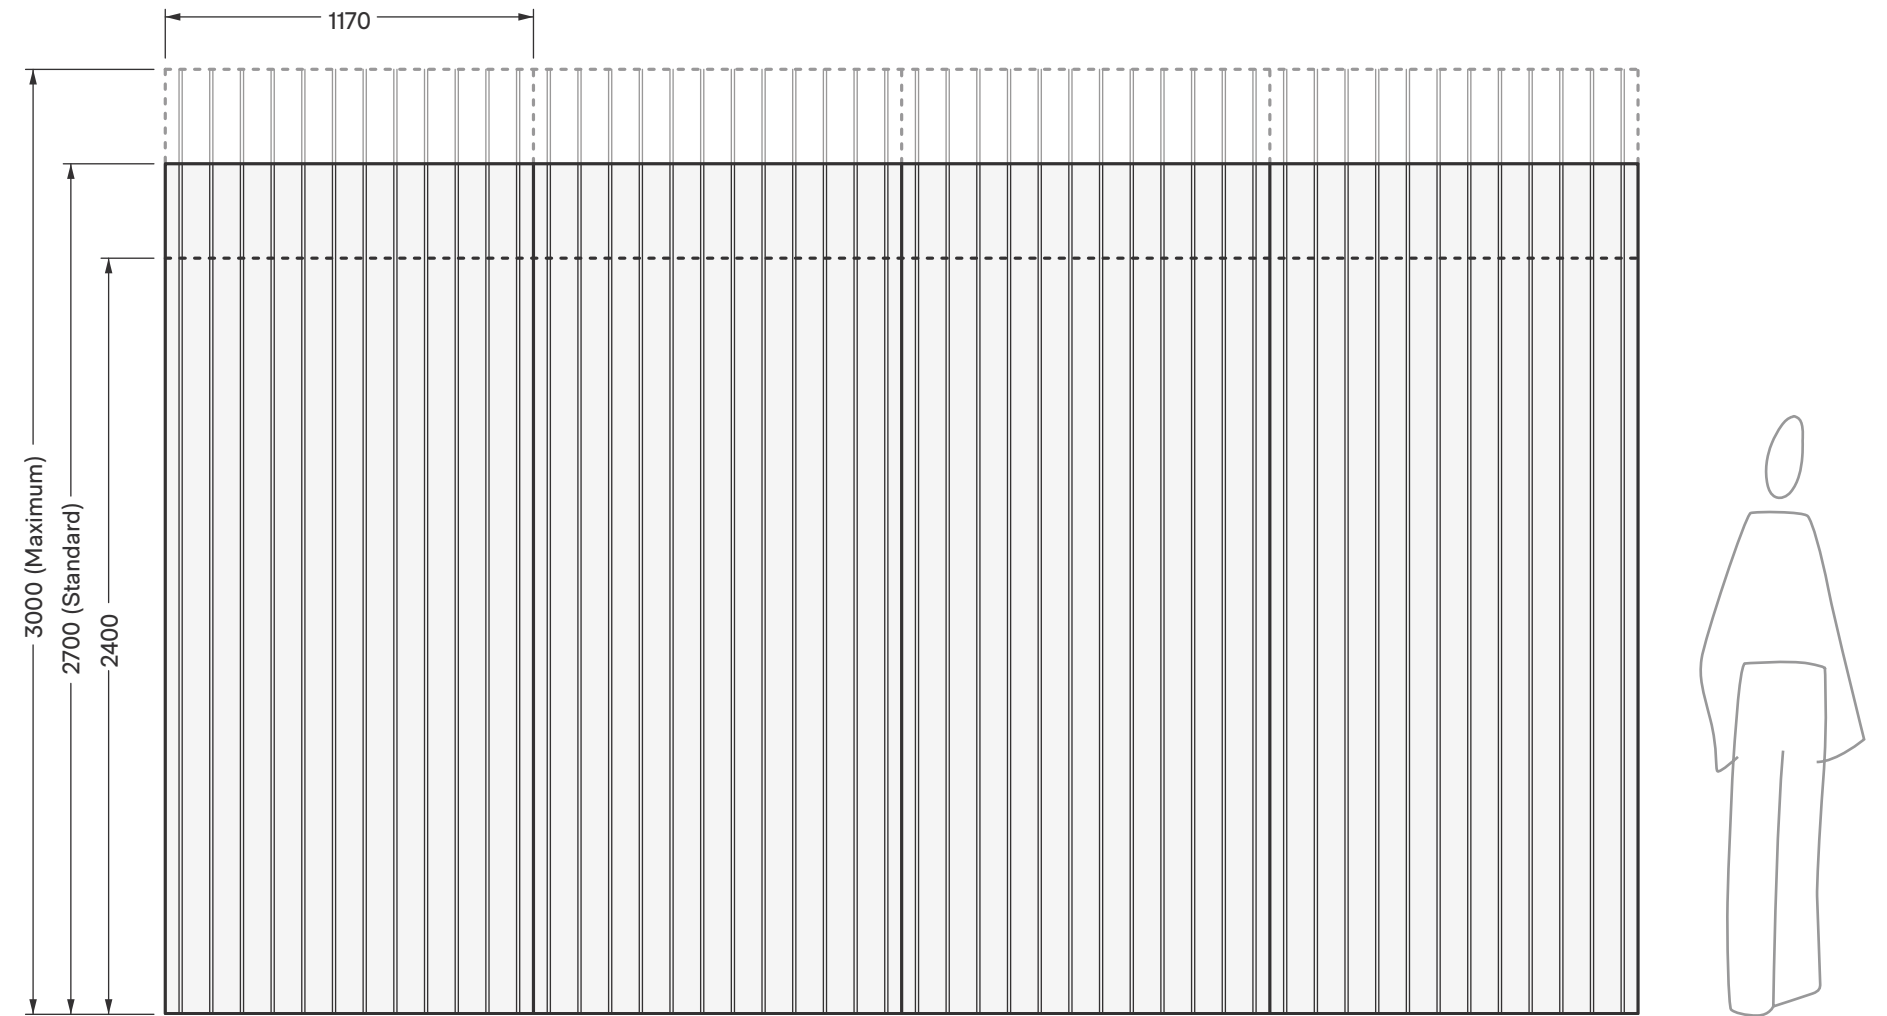





Windswept

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

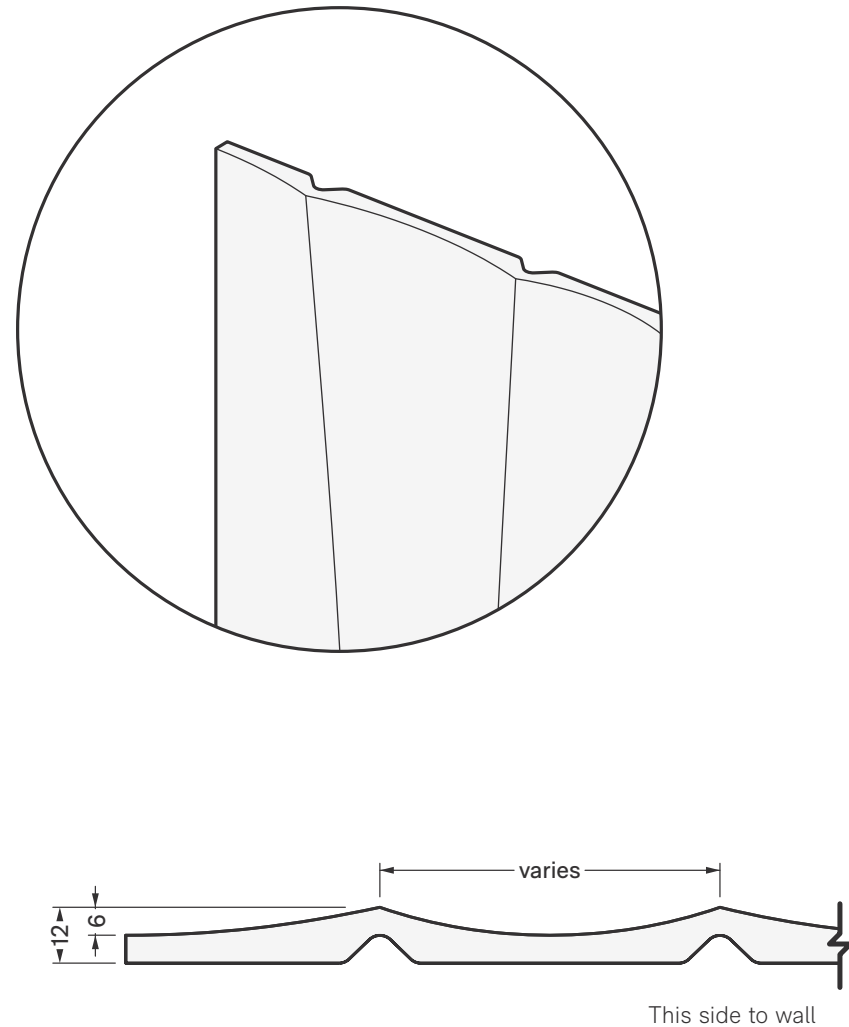


Layout Overview

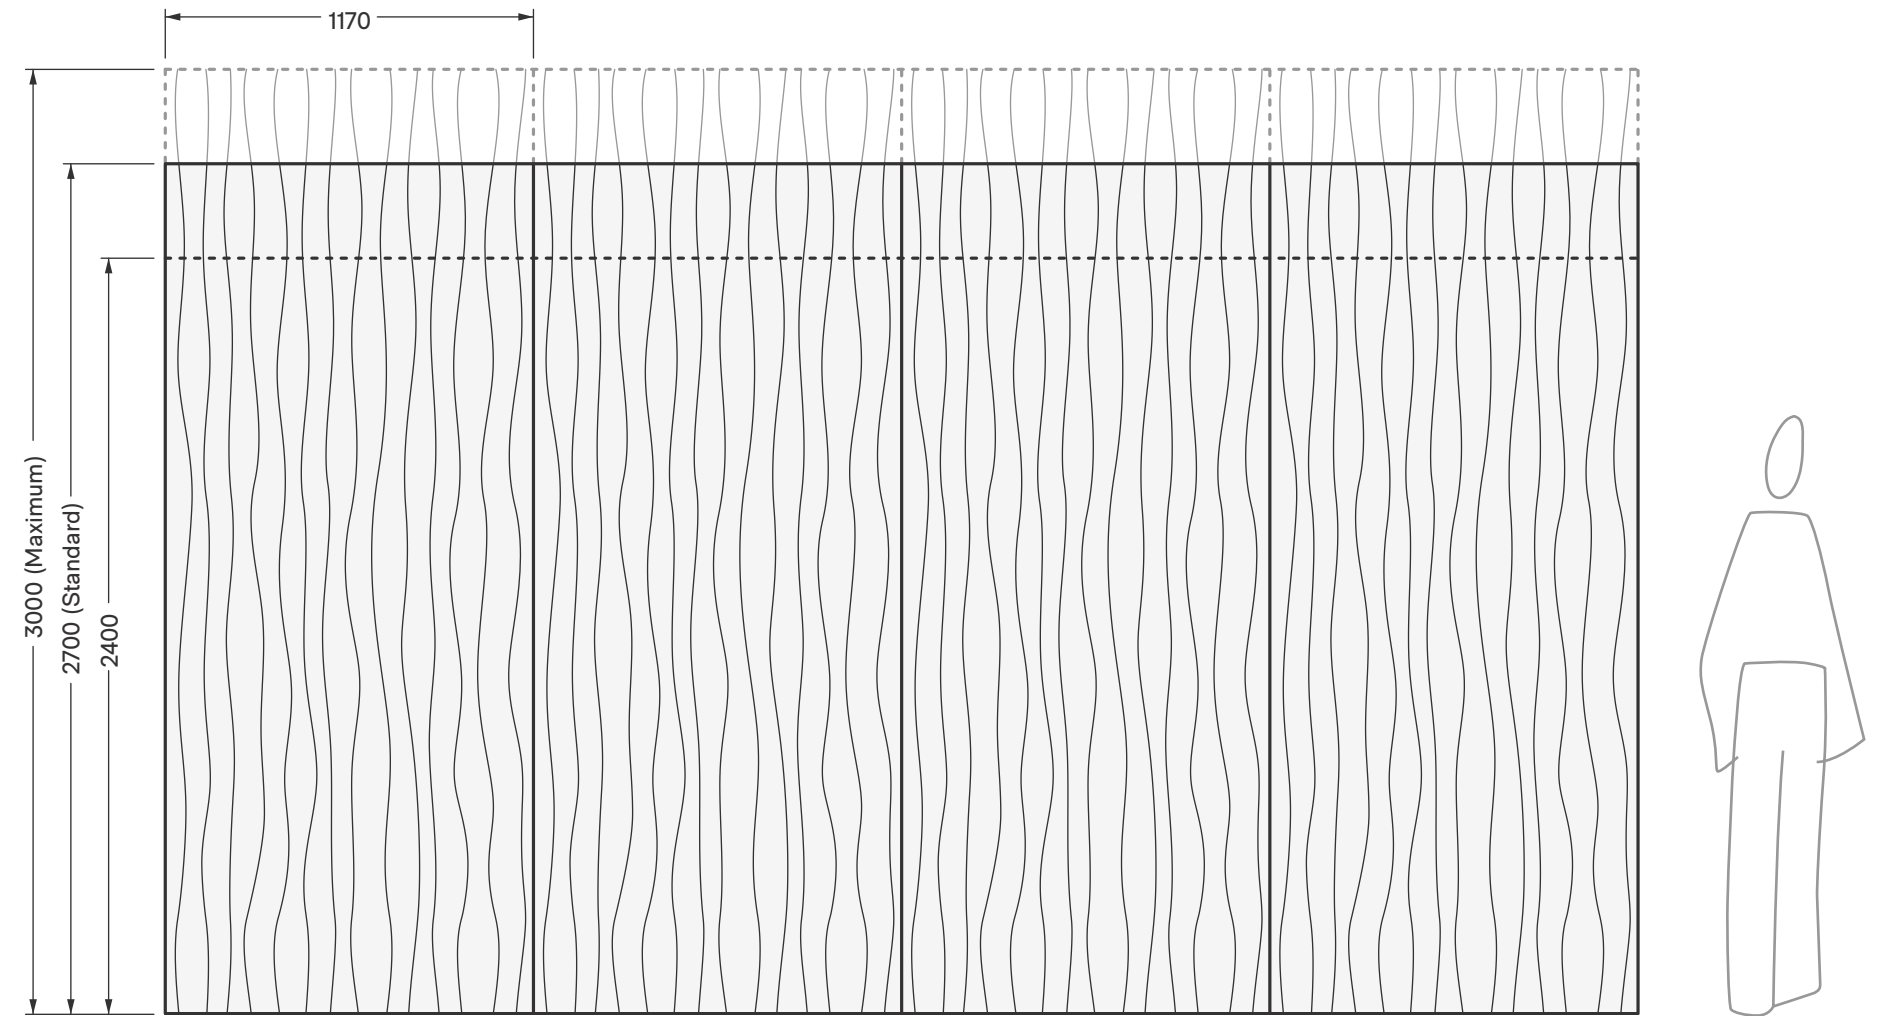




- The horizontal pattern repeats at panel edges (1170mm) and panel centre, refer to pattern dimensions below
- The vertical pattern repeats at centre points between pill details (5mm either side of relief)

Panel Details

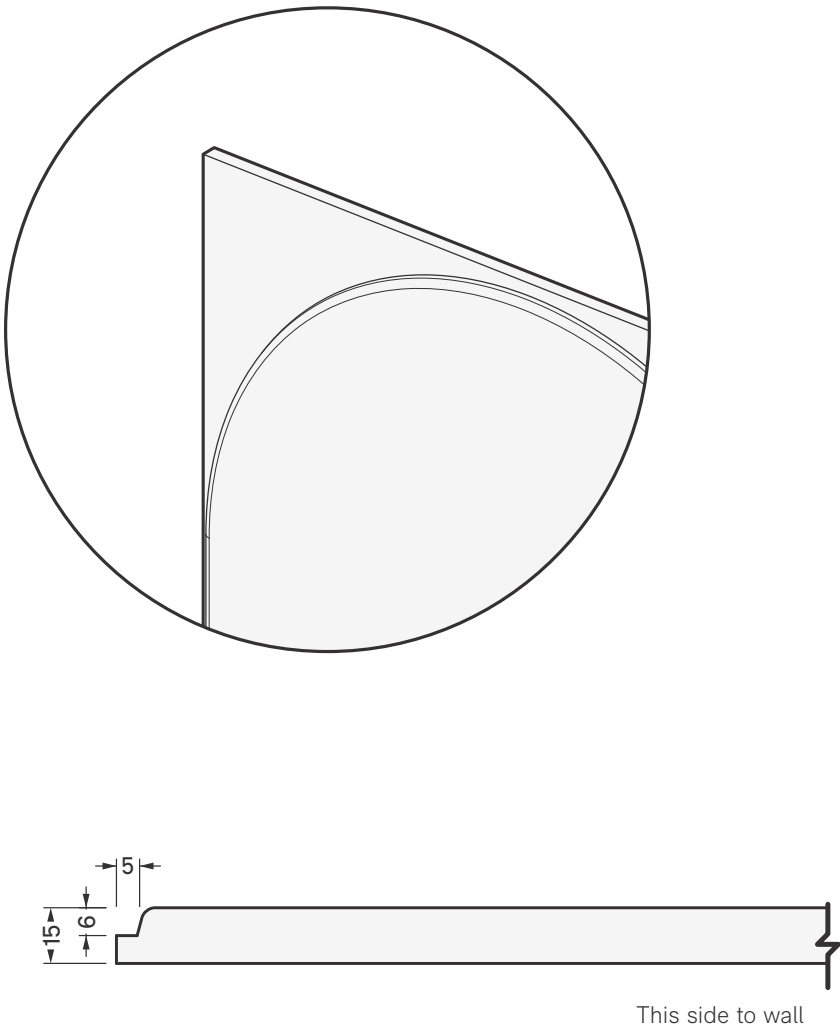

Layout Overview

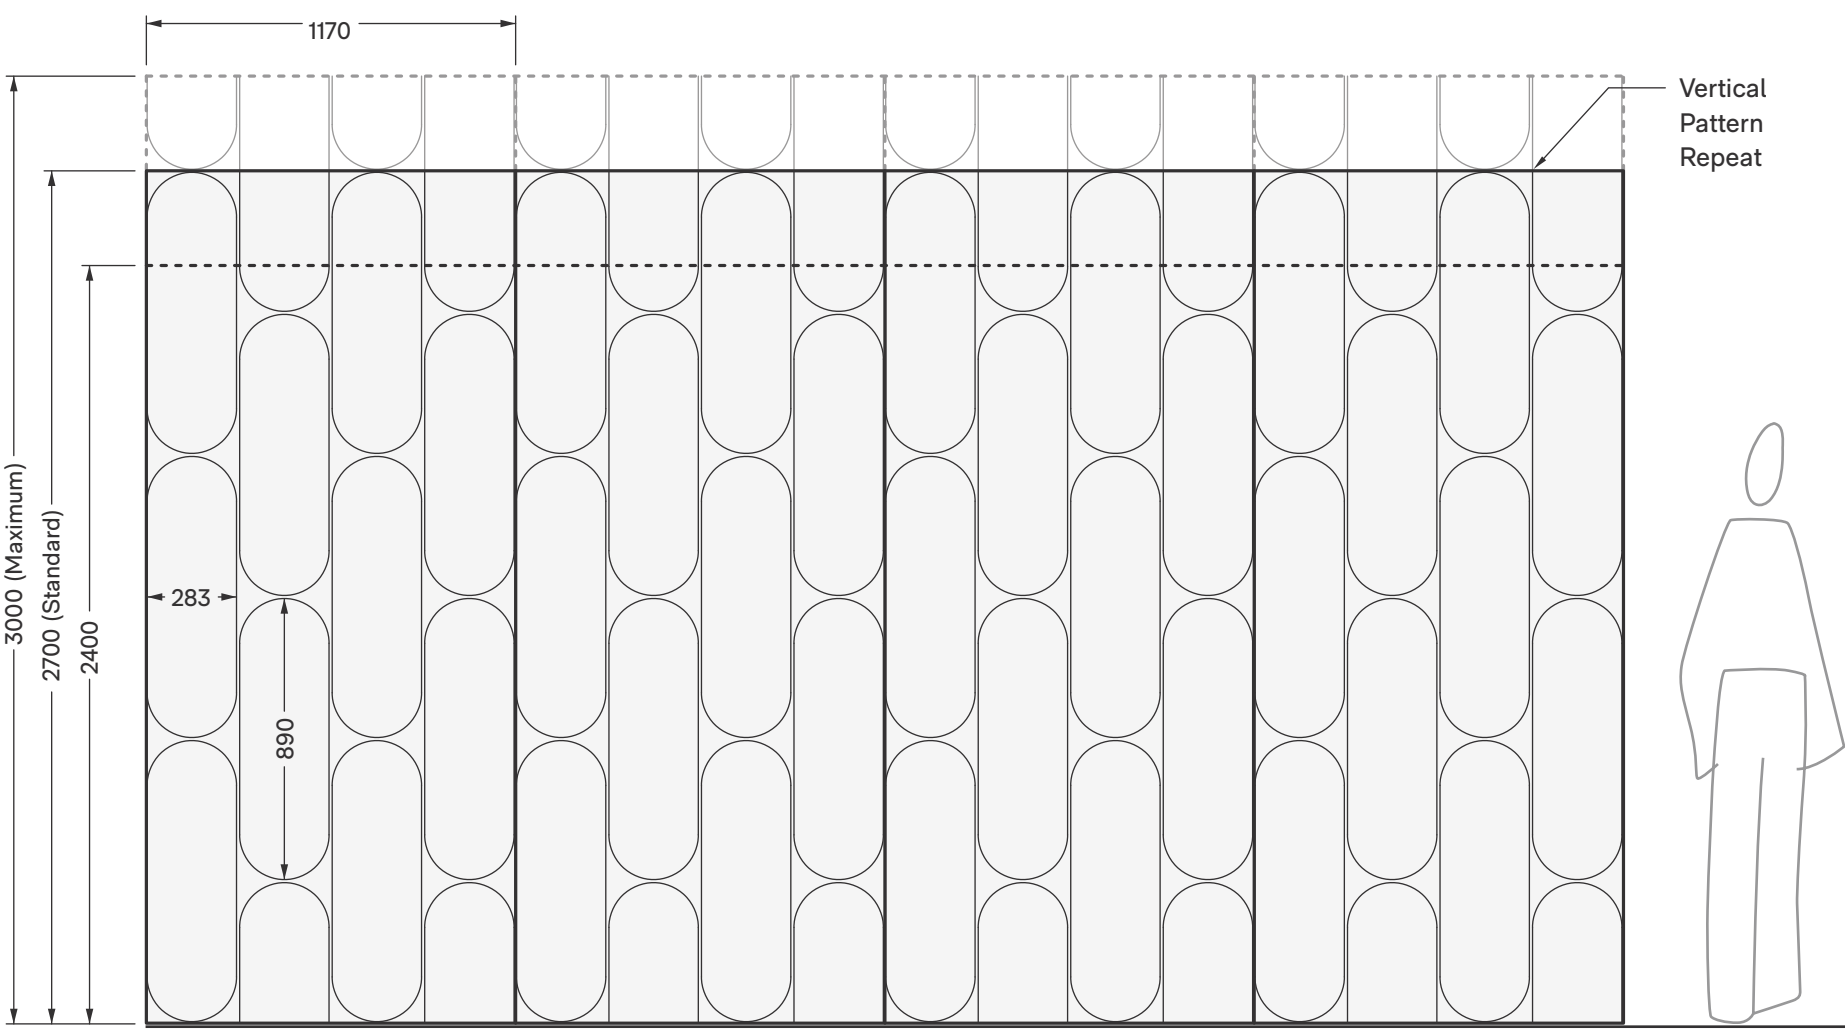




Detail Considerations


Trimming Panel

Verve panels can be cut on-site if required. For best outcome, we recommend cutting at pattern low-points. Refer to style detail page for more information.

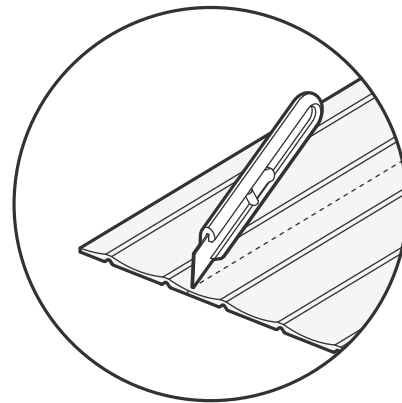

Power Outlets and Light Switches

Measure and cut out where the outlet would sit on the panel.
Apply the panel to the substrate and secure the outlet through the panel.

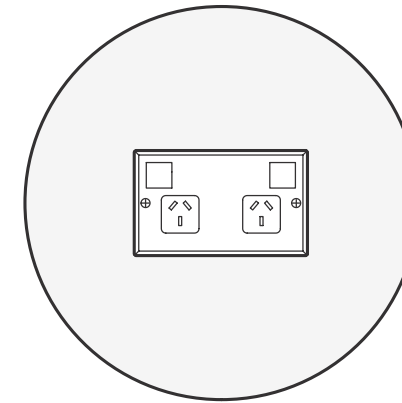

For further installation details, please refer to the Verve Installation Guide.



Colours

Cube™ Colours

Verve panels are available in the full range of Cube™ colours.



Pavilion



Opera



Parthenon



Senado



Beehive



Terrace



Canyon



Sargazo




Savoye




Colosseum



Rushmore



Flatiron



Cavalier




Falling Water



Muralla



Pinnacle



Acros



Highland



Gherkin



Tree House



Caspian



Empire



Petronas



Surface Finishes

Stone Finishes

Verve panels are available in stone finish for an added touch of elegance.



Carrara



Statuario




Statuario Rose



Travertine



San Pedro



Rojo Alicante



Empress Green



Fossena

Timber Grain Finishes

Verve panels are available in selected timber grain finishes for a biophilic look.



Birch



American Ash



Tasmanian Oak



Oak



Classic Oak



Black Walnut



Queensland Walnut



Grey Ironbark



Soft Walnut



Coastal Oak



Aged Oak



Civic Oak



Prime Oak



Yakisugi Black



Sound Materials

We're on a positive journey towards momentous change. It's about winning for the planet and its people, making a difference for healthy generations to come.

Sustainability is ingrained in everything we do, from fibre to finish. Our commitment to doing good now and in the future drives us to continuously evolve our practices, design with integrity, and take responsibility for the impact of our products. Our five sustainability pillars reflect this ethos, guiding our actions and shaping our decisions. Together, these pillars form a system that ensures our materials, products, and processes contribute meaningfully to a more sustainable world.



01



Climate change demands climate action

We are carbon neutral in everything we do.

02



Closing the loop

We are advocates for closing the loop on waste. We design with circularity front of mind.

03



Sustainable supply chain

We carefully select responsible suppliers and take action to mitigate unethical practices, and encourage good working conditions.

04



Supporting wellbeing in buildings

All our products are made using only safe materials. No harmful chemicals are present in our products.

05



Operating a business for purpose and profit

We strive to have a positive impact on our environment, our people, and the next generation.

Credentials

Sustainability isn't just a feature—it's a foundation. Our products are independently certified by trusted third-party certifications and labels to meet rigorous environmental and performance standards.

Our products also meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project.



Declare.





Our Journey to Nature Positive

We want to make a material difference to the planet and its people. That's why we're not resting on achieving carbon neutrality across the organisation and our products.

We're on a journey committed to Nature Positive, which ultimately delivers systems and products that contribute to biodiversity replenishment, carbon sequestration, and many positive environmental outcomes.

It's manufacturing that cares for human beings and the generations to come.

1967

Founded in Auckland, NZ, creating underfelt for the flooring industry.



1990

Established on-line recycling systems.



2020

Dematerialisation project, which reduced raw material by 30% for core product.



2017

First Environmental Product Declarations (EPDs) were published and started measuring GHG emissions.



2012

Reclaimed waste trimmings, reducing raw material use and associated emissions.



2021

We balanced all emissions from our acoustic products to zero.



0kg



2022

We balanced all emissions from our global operations to zero.

-8.6kg



2025

We received the first NaturePositive+ Declaration in the construction industry for our first carbon negative product we launched in New Zealand. It uses a material with a -8.6 CO₂e carbon footprint.



Technical Information

Overview

NRC	0.30 - 0.65
Content	100% PET, min. 80% recycled
Form	Panel
Dimensions	1170mm x 2700mm (standard)
Thickness	12mm
Tolerance	(-/+ 10%)
Origin	Made in Australia and New Zealand

Acoustic Performance

Verve Contoured Panels are specifically designed to reduce and control reverberation and echo noise in building interiors.

	Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● 12mm Verve		0.00	0.05	0.10	0.40	0.70	0.80	0.30
● 12mm Verve (with 25mm air gap)		0.10	0.20	0.50	0.85	0.95	0.85	0.65

Fire Considerations

ISO 9705: 1993
Classification: **Group 1-S**
Fire test report available on request.

Ten Year Manufacturer's Guarantee

Product Specifications

Hard body impact	There is no surface damage or penetration when subjected to hard body impacts. When adhered to 10mm plasterboard, the system can resist a 9 joule impact.
Soft body impact	There is no surface damage or penetration when subjected to soft body impacts. When adhered to 10mm plasterboard, the system can resist a 70 joule impact.

Microbial resistance (ASTM G21-15):
Growth rating: 0

Colour fastness to light (ISO 105-B02:2014):
Rating: 6

Determination of colourfastness to rubbing (ISO 105-X12:2016):
Dry assessment: 4 - 5
Wet assessment: 4 - 5

Average % of water vapour sorption by weight after four days: 0.4%

For care and maintenance guidance, view the product Care and Maintenance Guide.

