



**Autex  
Acoustics®**

## Composition® Peel 'n' Stick Tiles

## Data Sheet

### Product overview

Composition® Peel 'n' Stick Tiles are a durable, high-performance acoustic tile with a simple adhesive backing. Made from 100% polyester fiber, Composition Peel 'n' Stick Tiles have a velvety soft hook-and-loop receptive pile, and pinnable self-healing surface. Peel 'n' Stick Tiles don't require safety equipment, spray adhesive, or dry time to install.

### Sustainable material

- Carbon neutral product
- Zero carbon manufacturing
- Recycled content
  - >60% recycled material
- Low VOC and CDPH compliant
  - <0.0035 mg/m<sup>3</sup> (7 days)
- Zero waste manufacturing initiative
- Sustainable supply chain and anti-modern slavery

### Environmental certifications

- EPD – compliant with ISO 14025 and ISO 15804
- Declare – Red List free (third party verified)
- ISO 14001 Certified Environmental Management
- Health Product Declaration
- CDPH Standard



**Declare.**



### Certifying your green building

Autex Acoustics products meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project. For support and guidance on available rating system points please visit [www.autexglobal.com](http://www.autexglobal.com), or speak with your Autex Acoustics account manager.

### Specification

(Wall) treatment shall be Autex Acoustics Composition® Peel 'n' Stick Tiles from non-woven, needle-punched polyester containing no less than 60% post-consumer recycled material as manufactured by Autex [www.autexglobal.com](http://www.autexglobal.com)

Tile 23.6" x 23.6" x 0.4" - 0.5" (nom.) depth, color ( ), sound absorption:

Class D, NRC 0.40, Fire ratings: ISO 9705: Classification: Group 1-S, AS ISO 9705 – 2003: Classification: Group 1, EN13501-1:2007+A1:2009: Classification: B - s1, d0

Install as per Autex recommendations.

If Composition Peel 'n' Stick Tiles are to be specified for use other than as a wallcovering, please seek guidance from your account manager.



## Product specifications

|                            |                                   |
|----------------------------|-----------------------------------|
| <b>Product name</b>        | Composition® Peel 'n' Stick Tiles |
| <b>Composition</b>         | 100% polyester fiber (PET)        |
| <b>Size options</b>        | 23.6" x 23.6"                     |
| <b>Size tolerance</b>      | (+/- 0.02") x (+/- 0.02")         |
| <b>Thickness tolerance</b> | 0.4" - 0.5"                       |
| <b>Weight</b>              | 5.51 oz/ft <sup>2</sup>           |
| <b>Tiles per pack</b>      | 8                                 |

### Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website. If Composition Peel 'n' Stick Tiles are to be specified for use other than as a wallcovering, please seek guidance from your account manager.

### Thermal performance

0.4" - 0.5" R0.22(@59°F)

## Product specifications

### Fire ratings

Composition Peel 'n' Stick Tiles are made from Composition as the base material. Composition has been evaluated using the following test methods:

#### ISO 9705: 1993

Classification: Group 1-S  
Smoke production rate: <5.0m<sup>2</sup>/s  
As required by NZBC C/VM2

#### AS ISO 9705 - 2003

Classification: Group 1  
(SMOGR<sub>Arc</sub>): <100m<sup>2</sup>/s<sup>2</sup>

Assessed using methodology  
AS ISO 9705:2003  
in accordance with AS 5637:2015, as required by  
BCA Specification C110-4  
FI 4894  
FAR 4055

#### EN13501-1:2007

B - s1, d0  
Report 189053

#### ASTM E84 - 14

Class A, FS-5 - SD-25  
RJ3297

### Water vapour sorption

ASTM C1104 / C1104M-13a  
Test conditions: 49°C, 95%RH  
Water vapour absorbed and adsorbed after 4 days: 0.4% by weight.

### Microbial resistance

ASTM G21-15  
Growth rating: 0 (No growth)  
Composition Peel 'n' Stick Tiles do not promote the growth of molds and mildew.

### Impact resistance

ISO 7892:1988

### Hard body impact

There is no surface damage or penetration to Composition Peel 'n' Stick Tiles when subjected to hard body impacts. A small indentation might be observed when subjected to an impact equivalent to the impact of a 0.5 kg object dropped from a 0.5 m height. When adhered to 10 mm plasterboard, the system can resist a 9 joule impact, and no further indentations are observed. This is equivalent to the impact of a 0.5 kg object dropped from a 2 m height.

### Soft body impact

There is no surface damage or penetration to Composition Peel 'n' Stick Tiles when subjected to soft body impacts. When adhered to 10 mm plasterboard, the system can resist a 70 joule impact. This is equivalent to the impact of a 50 kg object dropped from a 150 mm height.

### Colour fastness to light

Composition Peel 'n' Stick Tiles are suitable for indoor use only. Light fastness is dependent on use and exposure. Composition Peel 'n' Stick Tiles have been evaluated to the following standard:  
ISO 105-B02:2014  
Rating: 6 (Highest = 7)

### Colour fastness to rubbing

ISO 105-X12:2016

Dry rating: 4-5 (Highest = 5)

Wet rating: 4-5 (Highest = 5)

### Pattern repeat

Non-woven. No pattern repeat, but product has directional grain. Product may vary from samples and batch to batch due to fiber blending and lay-up, which is an inherent feature of this product.

### Fabric care

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean dry cloth after each application of solution. Custom printed Composition requires the services of a specialist cleaning company. Refer to the Composition Peel 'n' Stick Tiles Care and Maintenance Guide for more information.

### Use of hook fasteners

Although the product surface is receptive to hook fasteners, repeated fastening and unfastening may result in wear on the product surface finish.

This is not a product fault, but an inherent nature of non-woven textiles.

We recommend low-profile, micro, or thin hook fasteners (max. 0.5 mm) as these are found to provide minimal wear on the product surface. Do not use high-profile or heavy-duty hook fasteners as they may result in visible wear in the product surface finish after repeated attachments.

For further information and recommendations on suitable hook fasteners, please contact your account manager.

### Service

For further information about Composition Peel 'n' Stick Tiles or any other Autex Acoustics product, please contact your account manager or visit our website.




## Acoustic performance

Composition Peel 'n' Stick Tiles are specifically designed to reduce and control reverberated noise and echo in building interiors. Autex Acoustics have researched the acoustic performance of Composition when covered in paper (e.g. children's artwork) and found that it helps achieve a more balanced acoustic environment. In some cases, covering Composition with unlaminated paper can have a positive effect on the acoustic performance of the wall. For more please contact your account manager.

| Frequency (Hz)                                   | 125  | 250  | 500  | 1000 | 2000 | 4000 | NRC  |
|--------------------------------------------------|------|------|------|------|------|------|------|
| ● Composition Peel 'n' Stick Tiles (0.4" - 0.5") | 0.05 | 0.10 | 0.25 | 0.55 | 0.80 | 0.95 | 0.40 |

Table presents the practical sound absorption coefficients as according to ISO 11654. Graph presents third octave sound absorption coefficients (according to ISO 354 measurement of sound absorption in a reverberation room). The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz, and 2000 Hz, and rounded to the nearest 0.05.

Absorption Coefficient According ISO 354  
University of Auckland Testing Service  
Composition Peel 'n' Stick Tiles (0.4" - 0.5") - Test No. T0814-2b

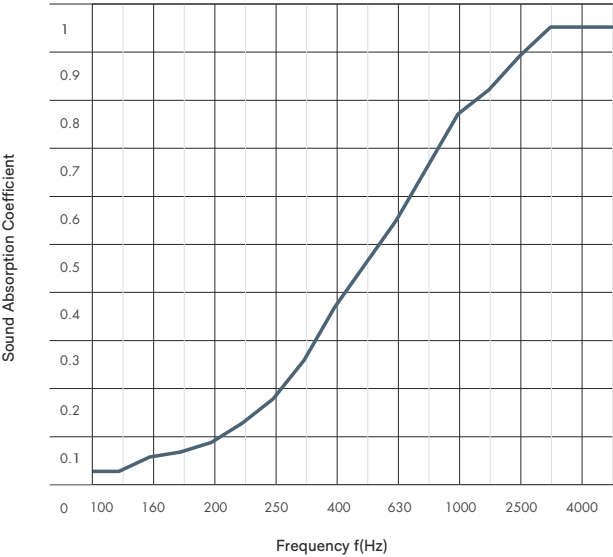

## Light reflectance values by color

Composition Peel 'n' Stick Tiles are suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

|               |    |            |    |
|---------------|----|------------|----|
| Acros         | 30 | Lime       | 29 |
| Atlantis      | 8  | Muralla    | 7  |
| Beehive       | 30 | Myst       | 42 |
| Blazing Red   | 8  | Octane     | 5  |
| Calypso       | 13 | Opera      | 47 |
| Canyon        | 14 | Parthenon  | 28 |
| Caspian       | 3  | Petronas   | 1  |
| Cavalier      | 10 | Pinnacle   | 2  |
| Chilli Red    | 5  | Porcelain  | 22 |
| Electric Blue | 12 | Sage       | 9  |
| Empire        | 3  | Sargazo    | 2  |
| Falling Water | 32 | Savoye     | 44 |
| Flatiron      | 23 | Senado     | 45 |
| Gherkin       | 5  | Simba      | 18 |
| Granny Smith  | 20 | Spearmint  | 13 |
| Highland      | 14 | Stonewash  | 19 |
| Ink           | 3  | Terrace    | 18 |
| Jade          | 22 | Tree House | 2  |
| Koala         | 12 | Vintage    | 6  |



● **New Zealand**  
702-718 Rosebank Road,  
Private Bag 19988,  
Avondale 1746, Auckland  
T 0800 428 839  
T +64 9 828 9179  
**autexacoustics.co.nz**

● **Australia**  
121-131 Global Avenue,  
Essendon Fields,  
VIC 3041  
T 1800 678 160  
T +61 3 9450 6700  
**autexacoustics.com.au**

● **United Kingdom**  
Unit J4, Lowfields Way,  
Lowfields Business Park,  
Elland, West Yorkshire,  
HX5 9DA  
T +44 142 241 8899  
**autexacoustics.co.uk**

● **United States**  
742 S Hill Street,  
Suite 501, Los Angeles,  
CA 90014  
T +1 424 203 1813  
**autexacoustics.com**

Autex is an ISO certified organisation encompassing Quality (ISO 9001), Environmental (ISO 14001), and Health and Safety (ISO 45001). Brand names and logos are registered or unregistered trademarks owned or used under license by Autex Industries Limited or other members of the Autex Group. © Copyright 2026 Autex Industries Ltd. All rights reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex Acoustics® account manager.