



**Product
overview**

Vicinity™ is a customisable workstation screen system that minimises reverberated noise at the source. As a modular system, Vicinity Workstation Screens work in collaboration with our 100% recycled PET Vicinity Workstation Clamps. The clamps slot comfortably into the screen via pre-cut sockets and are then fixed to the desk edges. Customisation options for Vicinity workstation screens include style, width, height, colour and corner details.

Sustainable material

- Carbon neutral product, manufacturing and operations
- Pathway to zero waste manufacturing initiative
- Sustainable supply chain and anti-modern slavery programme
- Recycled content:
 - 100% recycled material (clamp)
 - >80% recycled material (screen)
- Low VOC and CDPH compliant
 - <0.092 mg/m³ (7 days)

**Environmental
certifications**

- EPD – compliant with ISO 14025 and EN 15804
- Declare – Red List free (third party verified)
- ISO 14001 Certified Environmental Management
- Health Product Declaration
- CDPH Standard



**Certifying your
green building**

Autex Acoustics® products meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project. For support and guidance on available rating system points please visit autexacoustics.com.au, or speak with your Autex Acoustics specification manager.

Product specifications

Product name Vicinity™ Workstation Screens
Content 100% polyester screens;
 100% recycled PET clamps (RePET)
Thickness 12 mm | 24 mm
Tolerance (+/- 6%)

Installation
 Install as per Autex Acoustics recommendations.
 Install instructions are available on the website.




Acoustic performance

Vicinity Workstation Screens are specifically designed to help improve acoustic privacy and reduce noise levels.

	Frequency (Hz)	125	250	500	1000	2000	4000	Metric sabin per unit
● Haven (1600 mm/1800 mm)		0.50	1.00	1.40	1.65	2.10	2.35	1.55
● Hedge (600 mm)		0.30	0.65	0.90	1.10	1.35	1.50	1.00
● Hedge (1800 mm)		0.35	0.75	1.00	1.20	1.55	1.75	1.10
● Modesty (600 mm/1800 mm)		0.30	0.80	1.00	1.20	1.50	1.70	1.10
● Nook (1600 mm/1800 mm)		0.50	1.00	1.40	1.65	2.10	2.35	1.55
● Sol (600 mm)		0.10	0.20	0.25	0.35	0.40	0.45	0.30

Equivalent absorption area according to ISO 354

Haven	(1600 mm/1800 mm)
Hedge	(600 mm)
Hedge	(1800 mm)
Modesty	(600 mm/1800 mm)
Nook	(1600 mm/1800 mm)
Sol	(600 mm)

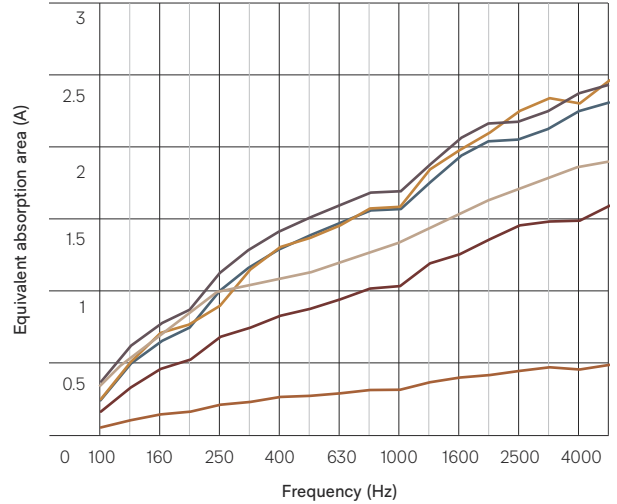

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz, and 2000 Hz and rounded to the nearest 0.05.

Product specifications

Fire ratings

Vicinity Workstation Screens are made from Cube™ as the base material. Cube has been evaluated using the following test methods:

ISO 9705: 1993

Classification: Group 1-S

Smoke production rate:

<5.0m²/s

As required by NZBC C/VM2

AS ISO 9705 - 2003

Classification: Group 1

(SMOGR_{arc}): <100m²/s²

Assessed using methodology AS ISO 9705 - 2003 in accordance with AS 5637:2015, as required by NCC Specification 7: Fire Hazard properties: S7C4 FI 4974

FAR 4055

BS EN 13501-1:2018

Wall applications

Classification: B-s1, d0

(Cube 12 mm)

Tested according to BS EN ISO 11925-2:2020 and BS EN 13823:2020 + A1:2022 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 15102:2019. 7191361939-MEC25/03-JV

BS EN 1021-1

Result: Pass (Cigarette)

1362214.7

ASTM E-84-15a

Class A, FS:0 - SD:45

(Cube 1/2")

RJ4479-2

Water vapour sorption

ASTM C1104 / C1104M-13a

Test conditions: 49°C, 95%RH

Water vapour absorbed and adsorped after 4 days:

0.4% by weight

Microbial resistance

ASTM G21-15

Growth rating: 0 (No growth)

Vicinity does not promote the growth of moulds and mildew.

Colour fastness to light

Vicinity Workstation Screens are suitable for indoor use only.

Light fastness is dependent on use and exposure.

Vicinity Workstation Screens

have been evaluated to the

following standard:

ISO 105-B02:2014

Rating: 6 (Highest = 7)

Colour fastness to rubbing

SO 105-X12:2016

Dry rating: 4-5 (Highest = 5)

Wet rating: 4-5 (Highest = 5)

Fabric care

Blot spills from fabric quickly.

Wipe with a damp cloth.

Avoid rubbing and using

excessive amounts of water

as this will affect the finish.

Use carpet or upholstery

shampoo as directed.

Blot with a clean, dry cloth after

each application of the solution.

Custom printed Vicinity

Workstation Screens require

the services of a specialist

cleaning company.

Refer to the Autex Acoustics

Care and Maintenance Guide

for more information.

Service

For further information about

Vicinity or any other Autex

Acoustics product, please

contact your specification

manager or visit our website.

The information contained in

this document is correct to the

best of our knowledge at the

date of its publication.

It is the user's responsibility to

determine if this information

is suitable for their intended

application and to make sure

that this document is the most

current publication.

You can do this by checking

our website or contacting

your Autex Acoustics

specification manager.



Light reflectance values by colour

LRVs measured in accordance with BS 8493:2008+A1:2010

Acros	40	Opera	49
Beehive	33	Parthenon	33
Canyon	19	Pavilion	80
Caspian	6	Petronas	2
Cavalier	12	Pinnacle	3
Empire	5	Rosada	45
Falling Water	34	Sargazo	4
Flatiron	24	Savoye	46
Gherkin	8	Senado	44
Herald	11	Terrace	24
Highland	19	Tree House	3
Muralla	9		

● **New Zealand**
702-718 Rosebank Road,
Private Bag 19988,
Avondale 1746, Auckland
T 0800 428 839
T +64 9 828 9179
autexacoustics.co.nz

● **Australia**
121-131 Global Avenue,
Essendon Fields,
VIC 3041
T 1800 678 160
T +61 3 9450 6700
autexacoustics.com.au

● **United Kingdom**
Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire,
HX5 9DA
T +44 0 142 241 8899
autexacoustics.co.uk

● **United States**
742 S Hill Street,
Suite 501, Los Angeles,
CA 90014
T +1 424 203 1813
autexacoustics.com