



**Product  
overview**

Vicinity™ Workstation Clamps are exclusively designed for easy installation with Vicinity Workstation Screens and are made from 100% recycled PET through a unique and industry-first pelletising process called RePET. This process transforms in-house waste into pellets, which are then injection-moulded to create clamps and other Autex Acoustics® accessories. RePET has diverted 160,000 kg of waste from landfills to date, creating a truly circular lifecycle.\*

Because the Vicinity Workstation Screens and Clamps are made entirely from PET, they can be easily disassembled and recycled repeatedly through the RePET process, supporting sustainability at every stage.

\*Data calculated as of December 2024 and subject to future updates.

**Sustainable material**

- Recycled content:
  - 100% recycled material (clamp)
- Pathway to zero waste manufacturing initiative
- Carbon neutral product, manufacturing and operations
- Sustainable supply chain and anti-modern slavery programme
- Low VOC and CDPH compliant
  - <0.092 mg/m<sup>3</sup> (7 days)

**Patented design**

Vicinity Workstation Clamps feature a patented design that makes installation with Vicinity Workstation Screens easy and creates a sleek aesthetic to complement any workspace.

NZ DES 425911  
NZ DES 425912  
US DES PAT. D1005095S  
AU DES 201915344  
AU DES 201917046  
AU DES 201915344  
EU DES 006978144-0001


**Specification**

Vicinity Workstation Clamp screen thickness (⌋), colour (⌋)


Vicinity Workstation Clamps are available for 12 mm and 24 mm thick Vicinity Screens, and in two standard colours - black or off-white to suit your projects esthetic. Contact your Autex Acoustics account manager if you require any additional information.




## Vicinity Workstation Clamp

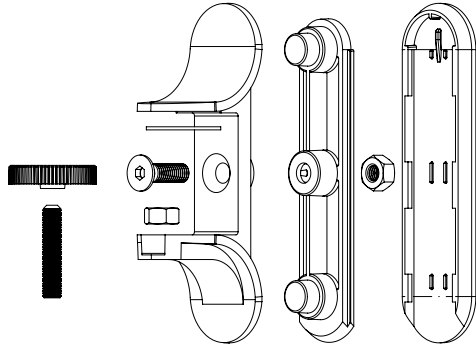

## Vicinity Workstation Clamp 12 mm

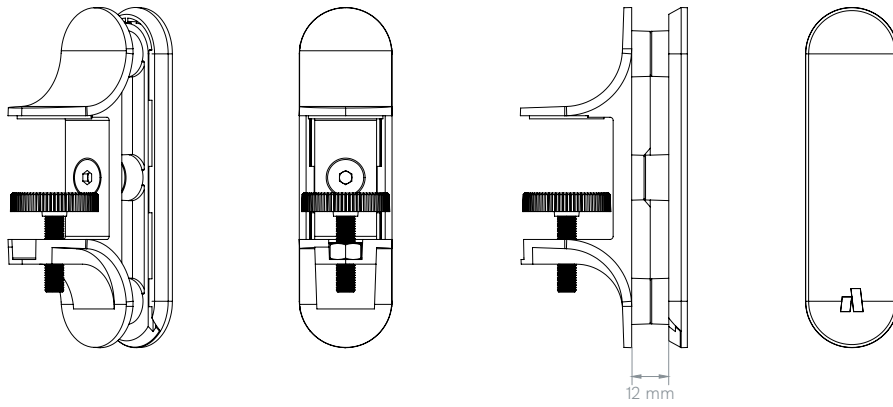

## Vicinity Workstation Clamp 24 mm

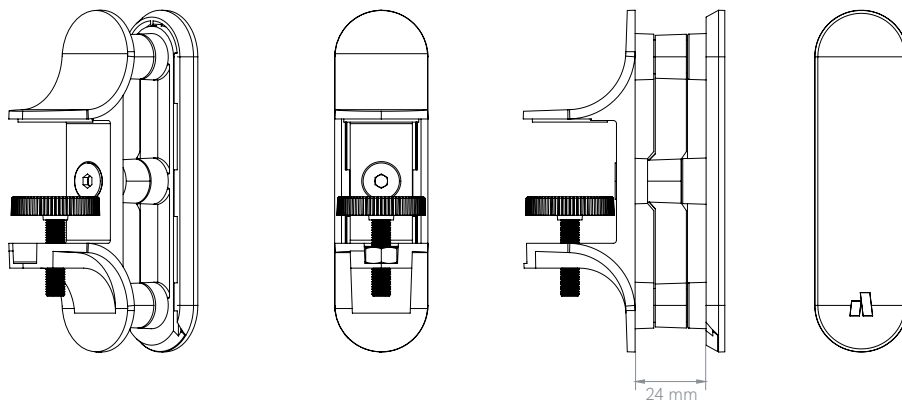



---

## Standard colours

Vicinity Workstation Clamps are available in two standard colours - black or off-white.



---

## On-site care

Vicinity Workstation Clamps can be damaged if not handled with care. Avoid bending and crushing. Store in a safe place.

---

## General installation

Vicinity Workstation Clamps should always be installed in accordance with the manufacturer's instructions and as per the specification detail. If there is conflicting information, you must seek clarification from all appropriate parties before proceeding with the work.

Installation instructions are available online at [autexacoustics.com.au](http://autexacoustics.com.au)

---

## Service

For further information about Vicinity Workstations or any other Autex Acoustics product, please contact your account manager or visit our website.

---

● **New Zealand**  
702-718 Rosebank Road,  
Private Bag 19988  
Avondale 1746, Auckland  
T 0800 428 839  
T +64 9 828 9179  
[autexacoustics.co.nz](http://autexacoustics.co.nz)

● **Australia**  
285 Swan Street,  
Richmond, VIC 3121  
T 1800 678 160  
T +61 3 9450 6700  
[autexacoustics.com.au](http://autexacoustics.com.au)

● **United Kingdom**  
Unit J4, Lowfields Way,  
Lowfields Business Park,  
Elland, West Yorkshire  
HX5 9DA  
T +44 0 142 241 8899  
[autexacoustics.co.uk](http://autexacoustics.co.uk)

● **United States**  
1630 Dan Kipper Drive,  
Riverside, CA 92507  
T +1 424 203 1813  
[autexacoustics.com](http://autexacoustics.com)

Autex is an ISO certified organisation encompassing Quality (ISO 9001), Environmental (ISO 14001), and Health and Safety (ISO 45001). Brand names and logos are registered or unregistered trademarks owned or used under license by Autex Industries Limited or other members of the Autex Group. © Copyright 2024 Autex Industries Ltd. All rights reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex Acoustics account manager.