



**Autex
Acoustics®**

Verve™ Contoured Panels

Install Instructions

These installation instructions are of a general nature and designed to assist suitably experienced tradesperson to install Verve™ to a high standard in common wall and ceiling installations.

For installation support, contact your Autex Acoustics® account manager before you start.

Selected designs have a pattern repeat which must be considered to ensure a seamless and consistent appearance. All designs have a directional grain and must be installed with the grain running in the same direction to avoid any appearance of colour variation.

Manufacturer's Documents

Autex Acoustics recommends that all persons engaged in installing Verve have full knowledge of the product and installation procedure as set out in the most recent edition of the manufacturer's instructions and related documents.

Manufacturer's documents relating to work in this section are:

- Verve™ Install Instructions
- Verve™ Path to Specification
- Autex Acoustics® Care and Maintenance Guide

Copies of the above literature are available on request or from the Autex Acoustics website.

Devices Generating Heat

Localised high-temperature conditions that may be detrimental to wall and ceiling linings can occur in the following situations, including but not limited to:

- Radiant heaters
- Lighting
- Heat pumps
- Reverse cycle air conditioners
- Solid fuel stoves

For more information, refer to the current documents below:

- NCC provisions for installation of heating appliances, fireplaces, chimneys and flues
- AS/NZS 2918 Domestic solid-fuel burning appliances — Installation
- AS/NZS 5601 Gas installations
- AS/NZS 3000: Unit manufacturer installation instructions

All appliances including lamps, luminaires and their associated ancillary gear should be installed so as not to cause the Verve surface temperature to rise above 80°C.

Inspection

Before starting the installation of Verve, check again that the materials have been supplied as ordered and are free from damage or faults. Check colours and product labels to ensure the product has been supplied correctly.

Where multiple sheets of Verve are required, it is important to check that all product is supplied from one batch. Due to batch to batch variation, we do not recommend joining different batch lots as this could result in colour variation.

Any variations must be reported to Autex Acoustics prior to commencing the installation. No claims will be accepted where the job continues with obvious faults, and no consultation with Autex Acoustics has taken place.

Transportation, Storage, and Handling

Verve panels must be transported, stored and handled with care. Verve should be kept dry and stored indoors. Avoid delamination or distortion and protect edges from being crushed.

Do not accept damaged product. If the product arrives damaged note the condition on the freight documents and contact Autex Acoustics account manager immediately.

Goods signed as receipted in 'good condition' will not be the responsibility of Autex Acoustics.

Always transport and store Verve panels on a flat, clean, and dry surface.



On-Site Panel Care

Verve panels are a semi-rigid product that can be damaged if not handled with care. Avoid bending the packs and panels as this could cause creasing. Do not store or drop the panels on their corners or edges as this will cause damage. Clean cloth gloves are ideal when handling Verve to avoid soiling.

Substrate

Before work commences, all joins, gaps and cracks in the wall/ceiling substrate must be taped with propriety sealing tapes to eliminate the ingress of dust and foreign particles travelling from the cavity into the installed product over time. Ensure that the substrates, backgrounds and adjoining surfaces will allow work to reach the required standard.

Autex Acoustics recommends that the wall/ceiling surfaces be prepared to a minimum Level 3 finish.

Very porous surfaces may need to be sealed prior to applying the adhesive. Gloss and semi-gloss finishes should be lightly sanded and dusted clean prior to application of the adhesive.

All surfaces must be clean, dust-free and dry as dust and moisture will adversely affect the adhesive and may result in lack of adhesion.

Install Verve General

Verve should always be installed in accordance with these installation instructions and as per the specification detail and customer requirements. If there is conflicting information, you must seek clarification from all appropriate parties before proceeding with the work. It is imperative that the installation is planned before cutting and installing any product. Verve panels are supplied at the dimensions stated on your local

specification guide. We recommend working within dimensions that allow trimming to size. Verve panels are supplied squared and chamfered. If required, panels should only be trimmed along the outer edges. Always do a 'dry fit' first before fixing to ensure there are no undue gaps in panel joins or at junction points.

We recommend you "measure twice and cut once".

Installation Using Adhesives

Adhesives should be applied strictly in accordance with the adhesive manufacturer's instructions. Refer to the product label or the technical data sheet for spread rates, tack-off times, application methods and equipment required.

Adhesive spills or surface contamination should be cleaned immediately ensuring fabric care instructions on the Autex Care and Maintenance Guide are followed.

The job should be progressively checked for appearance, installation quality and adequate adhesion. Any variations in colour or appearance must be notified and discussed with your Autex Acoustics account manager. No claims will be accepted where the job continues with obvious faults, and no consultation with Autex Acoustics has taken place.

Recommended Adhesive

Autex Acoustics recommends a contact-type adhesive or high grab MS polymer adhesive for applying Verve to most common substrates. Prior to commencing work, we recommend contacting your local adhesive supplier with samples of the Autex Acoustics products you are installing and the specification of the substrates you are installing to.

It is the installer's responsibility to ensure that any adhesive is fit for the intended purpose. It also is the installer's responsibility to ensure that the substrate is fit for the application of adhesives and Autex Acoustics products. For information regarding adhesive suppliers, please contact your Autex Acoustics account manager.

Install Verve Walls

Verve should be installed to a clean, flat wall substrate that is prepared in accordance with the recommendations listed above. Verve panels come with a sticker on the side that needs to be installed to the wall. The arrow ensures all panels are installed in the same direction to prevent any perceived colour variation when installing panels side by side.

When installing Verve on walls, a contact spray adhesive or high grab MS polymer adhesive is recommended. For ease of installation, we recommend that you install each Verve panel individually. This includes the application of adhesive (contact your local Autex Acoustics account manager for suitable options) and rolling the panel.



Adhere to Substrate Using Contact Spray Adhesive

Apply the contact adhesive to the Verve panel and substrate as measured for the Verve panel, ensuring the adhesive manufacturer's instructions are followed correctly.

Ensure the adhesive has been tacked-off correctly then fit the Verve panel to the wall. Where joining Mirage panels with a butt-join it is recommended the panel is fitted firmly to the join first, then smoothed out to the edges applying

even pressure to ensure adequate adhesive transfer and a strong bond.

Finally, apply sufficient pressure to the Verve panels towards the butt joins to ensure adhesive transfer and a strong bond. Care must be taken not to crush or mark the panels facing during this process.

Continue as above for all panels until complete.

Adhere to Substrate Using High Grab MS Polymer Adhesive

Refer to the adhesive manufacturer's detailed install instructions in the first instance when available. In the absence of detailed instructions from the adhesive manufacturer, you may refer to the instructions below.

Use a suitable caulking gun in combination with a compatible nozzle when applying MS polymer adhesive. A bead size of not less than 6mm in diameter is recommended. Apply straight, continuous beads of MS adhesive along the length of the panel (if panels are to be installed vertically) or across the width of the panel (if panels are being installed horizontally) at no more than 600mm intervals. The outermost adhesive beads must be placed approximately 30-50mm away from the edge of the panel to avoid the adhesive from leaking at the edges when pressure is applied. Apply additional anti-pillowing 100mm long beads between the continuous beads – see Figure 1 for details.

Ensure that the panel is installed before the adhesive forms a skin. Refer to the adhesive manufacturer's instructions for the skinning or skin over time. If the adhesive becomes skinned, it must be removed and replaced with fresh

adhesive prior to the installation of panels. Make sure always that the time between application of the adhesive and installation to the substrate is minimised.

Guide the panel evenly into position and press the panel firmly on the centre, leaving the outer spaces untouched. Apply sufficient pressure towards the ends and edges of the panel to ensure adequate adhesive contact and spread between the panel and the substrate. Care must be taken not to crush or mark the panels facing.

Note: If not enough pressure is applied, there is a high risk of the panel detaching from the substrate while the adhesive is curing.

Small wallpaper and vinyl rollers must not be used.

Where the above recommended bead spacings do not provide adequate wet grab strength to support the panels whilst the adhesive cures, either increase the bead size or reduce the spacing between beads.

Continue as above for all panels until complete.

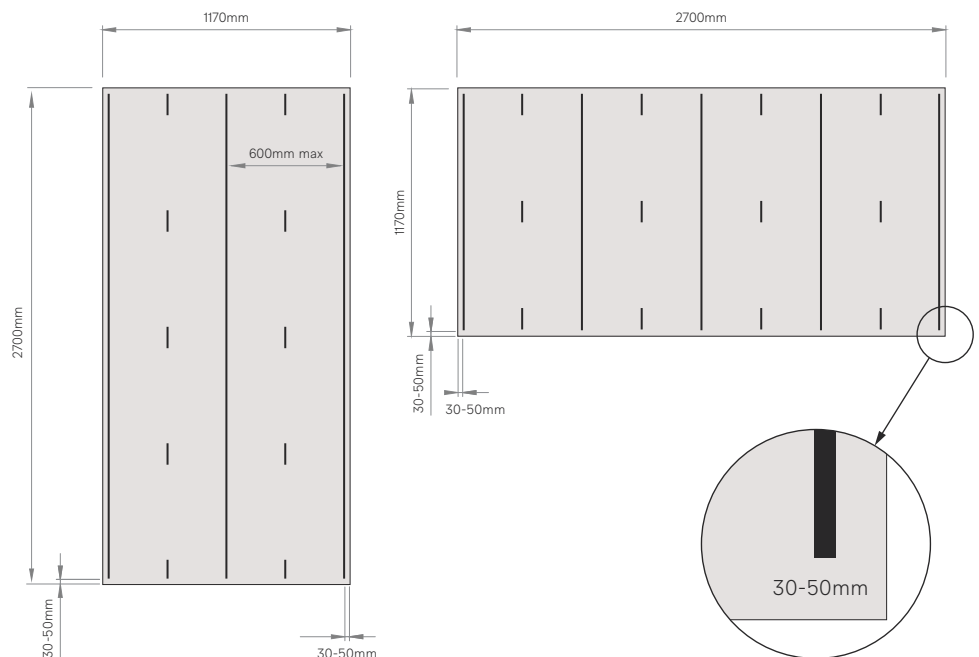


Figure 1



Install Verve Ceilings

Verve can be installed to a flat ceiling substrate or direct fixed to battens.

When Verve panels are installed overhead, high grab MS polymer adhesive is recommended.

Note: Mechanical fixings that are visible after install such as screws are not recommended for Verve. When visible mechanical fastenings or screws are desired, consult your Autex Acoustics account manager for details on how to properly install Verve using mechanical fixings.

Fix to Ceiling Substrate Using Adhesives

Verve should be installed to a clean, flat ceiling substrate that is prepared in accordance with the recommendations listed above. For ease of installation, we recommend that you install each Verve panel individually. This includes the application of a suitable high-quality adhesive (contact your local Autex Acoustics specification manager for suitable options) and rolling the panel.

To ensure a tidy and flat installation, additional battens may be required, refer to 'Fix to battens' section.

Refer to the adhesive manufacturer's detailed install instructions in the first instance when available. In the absence of detailed instructions from the adhesive manufacturer, you may refer to the instructions below.

Use a suitable caulking gun in combination with a compatible nozzle when applying MS adhesive. A bead size of not less than 6mm in diameter is recommended. Apply a straight continuous bead around the perimeter of the panel, leaving a 30-50mm gap at the corners and ensuring that the perimeter bead is 30-50mm away from the edges of the panel to avoid the adhesive from leaking at the edges when pressure is applied. Apply internal, continuous beads along the length or across the width of the panel at no more than 300mm intervals. The internal beads should finish approximately 100mm away from the perimeter beads. Please refer to Figure 2 for details.

Ensure that the panel is installed before the adhesive forms a skin. Refer to the adhesive manufacturer's instructions for the skinning or skin over time. If the adhesive becomes skinned, it must be removed and replaced with fresh adhesive prior to the installation of panels. Make sure always that the time between application of the adhesive and installation to the substrate is minimised.

Guide the panel evenly into position and press the panel firmly on the centre, leaving the outer spaces untouched. Apply sufficient pressure towards the ends and edges of the panel to ensure adequate adhesive contact and spread between the panel and the substrate. Care must be taken not to crush or mark the panels facing.

Note: If not enough pressure is applied, there is a high risk of the panel detaching from the substrate while the adhesive is curing. Small wallpaper and vinyl rollers must not be used.

Where the above recommended bead spacings do not provide adequate wet grab strength to support the panels whilst the adhesive cures, either increase the bead size or reduce the spacing between beads. We recommend the use of temporary bracings or double-sided tape to hold the panels in place until the adhesive is completely cured.

Continue as above for all panels until complete.

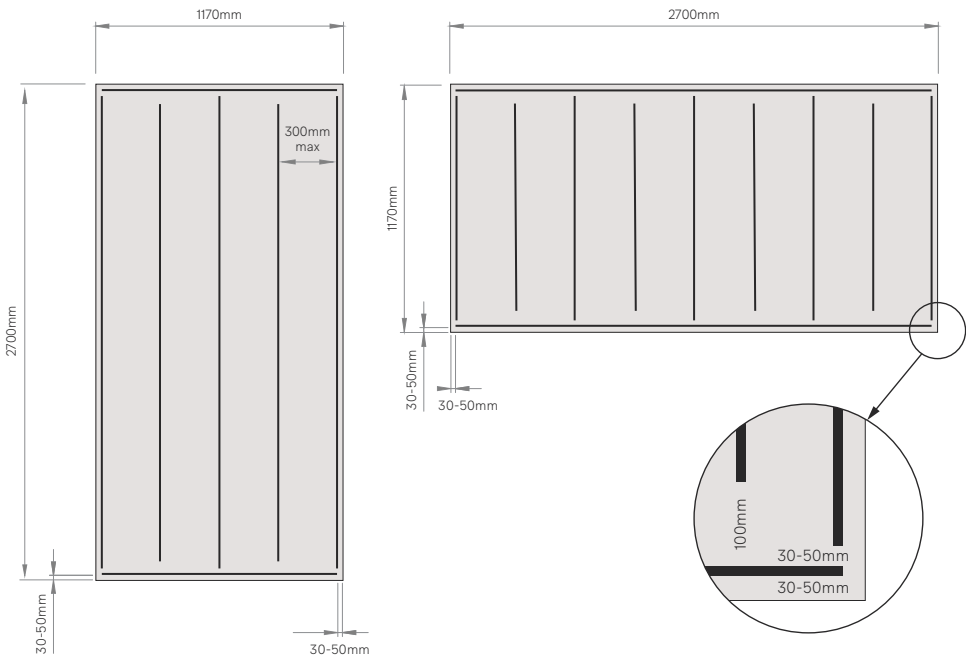


Figure 2



Fix to Battens Using Adhesives

To ensure a tidy and flat installation, make sure the batten surfaces are flat and flush as Verve panels will show any undulation caused by mismatched joints or protruding fixings.

Battens should be 35mm minimum width and centres should be set at no more than 300mm to reduce the potential of the Verve panels pillowing or sagging. Apply a continuous bead of MS adhesive along the length of the batten. A bead size of not less than 6mm in diameter is recommended. Leave a gap of approximately 30-50mm between the adhesive beads and the edge of the panel. Where panels butt, allow a minimum 35mm fixing area for each edge of the Verve panel to ensure the edges can be securely fixed. This may require double-battening.

Ensure that the panel is installed before the adhesive forms a skin. Refer to the adhesive manufacturer's instructions for the skinning or


skin over time. If the adhesive becomes skinned, it must be removed and replaced with fresh adhesive prior to the installation of panels. Make sure always that the time between application of the adhesive and installation to the battens is minimised.

Apply sufficient pressure towards the ends and edges of the panel to ensure adequate adhesive contact and spread between the panel and the substrate. Care must be taken not to crush or mark the panels facing.

Note: If not enough pressure is applied, there is a high risk of the panel detaching from the substrate while the adhesive is curing. Small wallpaper and vinyl rollers must not be used.

We recommend the use of temporary bracings to hold the panels in place until the adhesive is completely cured.

Continue as above for all panels until complete.

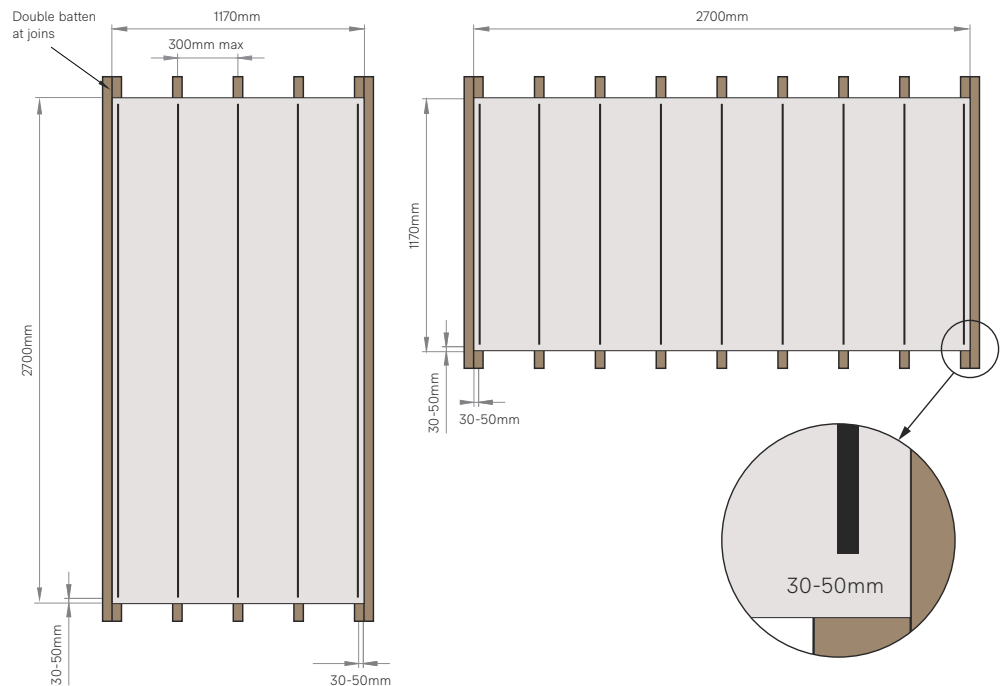

Cutting Verve

When cutting Verve, use a circular saw with a narrow blade with a minimum of 80 teeth. This will ensure a smooth cut. You may want to duct tape the saw's shoe so that it doesn't scratch up the surface as you cut. Alternatively Verve can be cut with a steady hand and a sharp utility knife.

Mark off the line you want to cut using masking tape. Alternatively, you can use a reverse toothed high carbon steel jigsaw blade with ground teeth which cuts down rather than up, so top surface maintains its finish. This is also the best option for making curved cuts.

Fixtures

Remove cover plates, light fittings and other fixtures as the work proceeds. Replace, plumb, square and true to line as the work is completed.

Note: All electrical plumbing, fire safety appliances and fittings should only be removed and reinstalled by an appropriately qualified person.



Penetrations

The fire and acoustic performance of walls and ceilings can be reduced by penetrations for plumbing, electrical switches, light fittings etc. For walls or ceilings that require a Fire Resistance Level (FRL) and or are acoustically sensitive, it is recommended that, wherever possible, such penetrations are avoided. Where penetrations are necessary only appropriately rated proprietary sealants and fittings should be used.

If unsure, we recommend consultation appropriately qualified person is undertaken to ensure the building's performance objectives are maintained.

Replace

Replace damaged or marked elements.

On Completion

Leave work secure, smooth and free of air bubbles, wrinkles, gaps, stains and blemishes and to the standard required by following

procedures. Clean adjoining surfaces of any adhesive. Remove debris, unused materials and waste from site.

Service

For more information, contact your Autex Acoustics account manager or visit our website autexacoustics.co.nz

● **New Zealand**
702-718 Rosebank Road,
Private Bag 19988,
Avondale 1746, Auckland
T 0800 428 839
T +64 9 828 9179
autexacoustics.co.nz

● **Australia**
121-131 Global Avenue,
Essendon Fields,
VIC 3041
T 1800 678 160
T +61 3 9450 6700
autexacoustics.com.au

● **United Kingdom**
Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire,
HX5 9DA
T +44 0 142 241 8899
autexacoustics.co.uk

● **United States**
742 S Hill Street,
Suite 501, Los Angeles,
CA 90014
T +1 424 203 1813
autexacoustics.com

Autex is an ISO certified organisation encompassing Quality (ISO 9001), Environmental (ISO 14001), and Health and Safety (ISO 45001). Brand names and logos are registered or unregistered trademarks owned or used under license by Autex Industries Limited or other members of the Autex Group. © Copyright 2026 Autex Industries Ltd. All rights reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex Acoustics' account manager.