



Design considerations in highly humid environments

● Custom Cube™
in Falling Water

● Hilton Brown Hobsonville,
New Zealand

High humidity in indoor spaces pose unique challenges to any acoustic wall or ceiling systems. Interior acoustics features must be designed so that condensation risks are mitigated, molds do not grow on the surface, and any metal components do not corrode and fail over time. An acoustic feature covered in mold and mildew is both unhealthy and unsightly. Likewise, any acoustic ceiling with corroded fixings may result in the collapse of the ceiling which is a safety risk for occupants of the space. This highlights the importance of correct design of acoustic wall and ceiling systems in humid environments.

High humidity

An environment is considered to have high humidity when the relative humidity is above 65%. High humidity environments are common in locations closer to the equator or to a body of water. For example, many coastal cities in southern states that border the Gulf of Mexico are considered the most humid cities in the US. Similarly, coastal areas of New Zealand and the UK have high annual average relative humidity levels ranging from 70 to 90%. Major centres along the Australian coastline, including Darwin, Brisbane, Melbourne, and Sydney, may experience high relative humidity levels of up to 80%.

Condensation

As relative humidity levels go closer to 100%, there is a higher probability of condensation occurring. Condensation occurs in indoor spaces when the indoor air is so saturated with moisture that it can no longer hold more moisture. Condensation can also occur when warm humid air comes into contact with cold surfaces.

Effects of high humidity

High humidity in an indoor space can have detrimental effects to the materials in that space as well as the occupants. Firstly, high humidity allows for the growth of molds and mildew which can cause health problems such as asthma and allergies. Secondly, condensation resulting from high humidity might enhance the corrosion of some metal components which can weaken their structural integrity. Some surfaces, particularly painted and timber surfaces, might also experience discoloration when exposed to high humidity.

Growth of Molds and mildew

Molds and mildew are microscopic fungi that exist everywhere. These microbes can grow and multiply under a combination of four conditions:

1. Indoor temperature – Temperatures must be between 60 - 90°F for molds to thrive. The ideal indoor temperature for people to feel thermal comfort is also within this range.
2. Water – Molds thrive in damp, humid conditions, typically between 70 - 95% relative humidity.
3. Nutrients – Molds need a food source to grow. Molds feed on any organic matter, including wood, paper, and dust that contains organic matter.
4. Oxygen – Molds need oxygen to survive, which is present in all habitable indoor environments.

Molds and mildew can grow on any material surface, including glass, metal, and plasterboard or drywall, if all the above conditions are met.



Performance of Autex Acoustics® products in humid spaces

Autex Acoustics® products have low moisture absorption and perform well in high humidity environments. Our products have been independently tested and results show that when left in a 120°F and 95% relative humidity environment for four days, the product only absorbed 0.4% water. This is extremely good performance and is unique to the material used to make our product.

Autex Acoustics products have also been tested for mold resistance and no mold growth was observed on the tested product when exposed to mold spores at 86°F and 90% relative humidity for 28 days.

Although Autex Acoustics products do not inherently promote the growth of molds and mildew, molds and mildew might grow on the surface when the previously mentioned four listed conditions are present. Molds can grow particularly when nutrients are introduced to the product surface, such as when organic matter is blown from an air conditioning vent on to the surface, or when organic matter is carried with condensation from a source to the product. Water needed for mold growth may come from condensation somewhere which then travels to the product. An example of this would be when condensation occurs on the underside of a roof and the resulting water droplets fall on top of a suspended ceiling.

Preventing condensation

By preventing condensation, the risk of mold growth is reduced significantly. Adequate ventilation combined with best practice wall and ceiling design is critical to preventing condensation.

To avoid condensation while keeping occupants comfortable, The American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE) recommends:

- Indoor temperatures to be between 67 - 82°F, and
- Relative humidity to be below 65%.

The Chartered Institution of Building Services Engineers (CIBSE), another reputed international authority in building services and ventilation, recommends a similar target for relative humidity of 40 - 70%.

Indoor swimming pools pose higher risks of condensation due to the presence of significant amounts of water, and as such has more stringent requirements. According to ASHRAE, indoor air temperature must be maintained 2 - 4°F above the pool temperature but not more than 86°F, and relative humidity must be maintained between 50 - 60%.

To achieve these ideal conditions, adequately designed heating, ventilation, and air conditioning (HVAC) systems and controls must be employed. There must be good HVAC operational management in place before interior acoustics products are installed in a space. Air distribution must also be sufficient to effectively direct humid air from wall and ceiling surfaces and prevent condensation.

Design and installation of Autex Acoustics

Although Autex Acoustic products offer superior performance in highly humid environments, they must be designed and installed in a manner that does not enhance condensation on the surface. This same advice also applies to other materials in the same environment.

Autex Acoustics products installed on ceilings must not create an airtight cavity in the roof to prevent a significant temperature difference across the cavity. This would reduce the risk of condensation caused by warmer air encountering a cold surface. There should also be efficient air distribution in the roof area to direct humid air away from the roof, further reducing the risk of condensation.

When installing acoustic panels on ceilings, it is important that any cavity between the roof and the acoustic panel is kept well-ventilated to avoid condensation.



a. Bespoke louvre panel design allowing air flow in the roof cavity




b. QuietSpace® Panels with gaps to keep the roof cavity well-ventilated

Design and installation of Autex Acoustics cont.

Vertical acoustic baffle products such as Frontier™ are recommended as they pose a lower risk of condensation by allowing efficient air movement through the ceiling and not causing any significant temperature difference in the roof that may result to condensation.

Clients are advised to consult with their Autex Acoustics account manager during the design phase of a project involving humid spaces. Autex Acoustics have been involved with installations in high humidity environments for many years and in that time have gathered specific knowledge in addressing issues of condensation and mold growth. Our design team can create bespoke products that are unique to the conditions and requirements of each project.

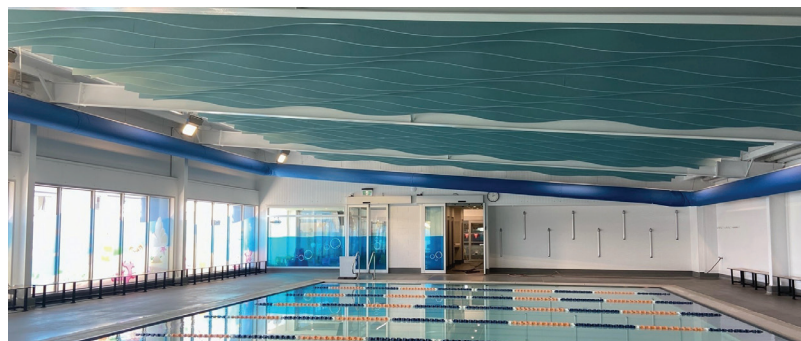

c. Frontier™ Talus in a humid space

Fixings for Autex Acoustics ceiling systems

Fixings used for Autex Acoustics ceiling systems in high humidity environments must be carefully selected so that the risk of corrosion is minimized. The Australasian standard AS/NZS 2785 for suspended ceilings recommends avoiding the use of type 304 and type 316 stainless steels in safety-critical and load-bearing applications as these are prone to stress corrosion cracking.

Type 254 stainless steel or any stainless steel with 6% molybdenum, is deemed as a more suitable fixing material in high humidity environments such as indoor pools.

Pairing zinc fixings with aluminum components should also be avoided to prevent corrosion on zinc fixings.

For more information on designing for highly humid spaces, please contact your Autex Acoustics account manager.

● **New Zealand**
702-718 Rosebank Road,
Private Bag 1998
Avondale 1746, Auckland
New Zealand
Freephone 0800 428 839
Phone +64 9 828 9179
Fax +64 9 828 5810

● **Australia**
285 Swan Street,
Richmond, VIC 3121,
Australia
Freephone 1800 678 160
Phone +61 3 9450 6700

● **United Kingdom**
Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire
HX5 9DA
United Kingdom
Phone +44 0 142 241 8899

● **United States**
1630 Dan Kipper Drive,
Riverside, CA 92507
United States of America
Phone +1 424 203 1813

Autex is an ISO certified organisation encompassing Quality (ISO 9001), Environmental (ISO 14001), and Health and Safety (ISO 45001). Brand names and logos are registered or unregistered trademarks owned or used under license by Autex Industries Limited or other members of the Autex Group. © Copyright 2022 Autex Industries Ltd. All rights reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.

IA_IAG_DO_Highly Humid Environments US_Oct22_RC