

Specification Guide

A lightweight but semi-rigid panel made from compressed polyester felt that has endless design flexibility.

In standard panel sizes with options of 3/8" or 1" thicknesses, Cube™ works hard to reduce reverberation and control background chatter.

In everything we do




Cube™ Acoustic Panel



Path to Specification


1. Space

What are the dimensions of the space you are designing?

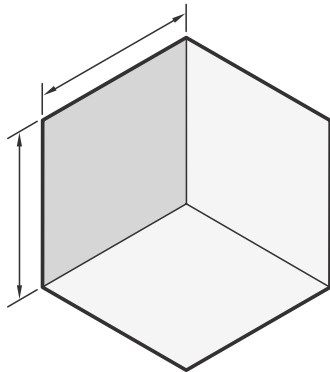


4. Detail Considerations

What install details should you consider?




2. Size

What panel dimensions are available?

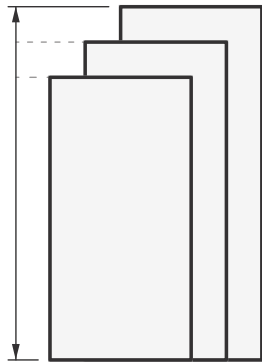

3. Custom Cutting

What are the possibilities of custom cutting?

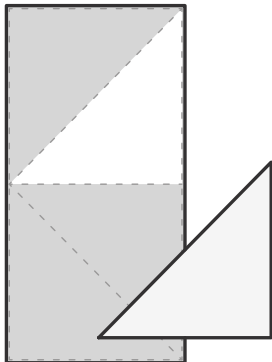


[Page 3](#)

[Page 4](#)


5. Colors and Finishes

What colors and finishes are available?



6. Technical Information

What are the technical specifications?



[Page 5](#)

[Page 6-10](#)

[Page 13](#)



Quick Reference

Panel Dimensions



Width	48" (1220mm)
Height	111.8" (2840mm)
Thickness	3/8" (9mm) and 1" (24mm)

Please contact your Momentum account manager for more information

Connection


SpinFix™	Adhesive-free installation available with SpinFix™ (supplied by Autex Acoustics)
Peel-and-Stick	Panels can be supplied with adhesive backing (supplied by Autex Acoustics)
Adhesive	Panels can be installed with appropriate adhesive (supplied by contractor)

See Product Installation Guide for further details

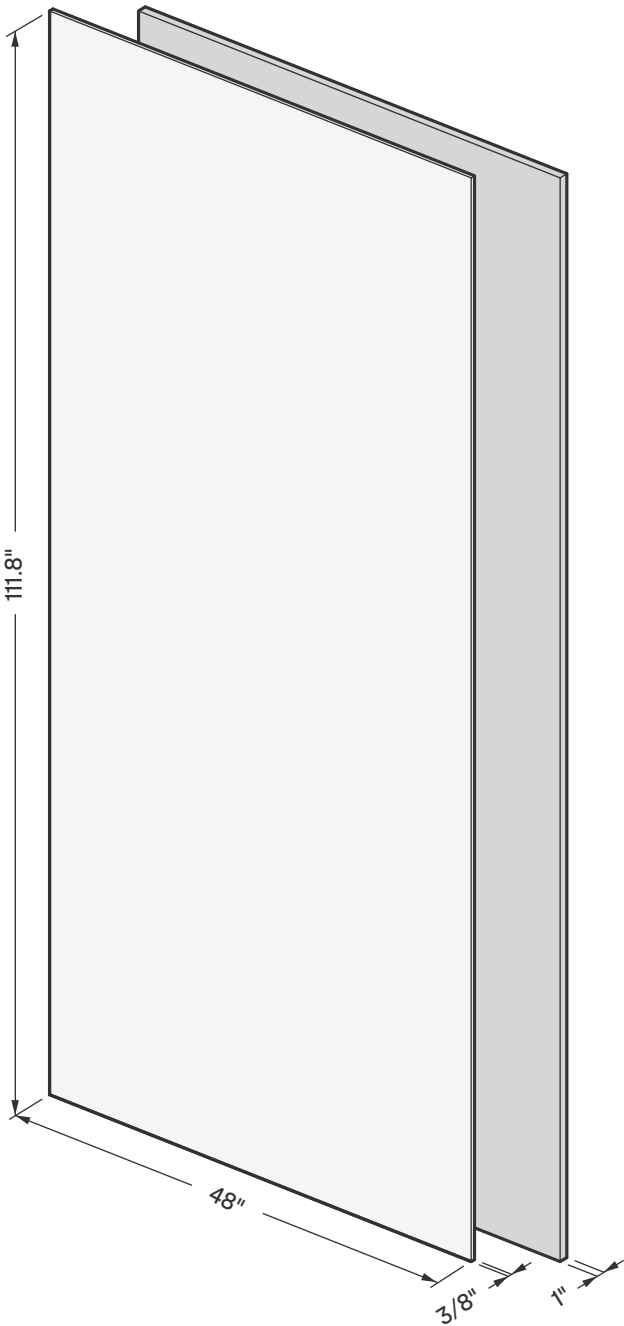


Cube color carries through the entire material section

Cube™ Color



When butt-joining, we recommend beveled edges for clean install

Beveled Edge



Panel edges can be treated with trims, see Edging Solutions Guide for further details


Trim



Custom Cutting

- Cube panels can be cut into a range of basic shapes to add variety to your install
- Inlays are a great way of adding complexity with simple forms and execution

Contact your Momentum account manager for more information.

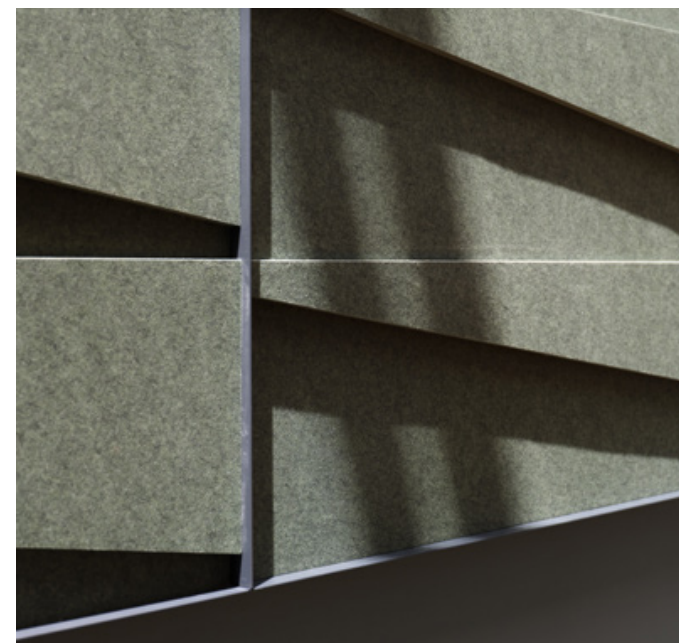




Detail Considerations


Cutting Panels

Cube Acoustic Panel can be cut on-site if required. We recommend using a snap blade knife and straight edge.

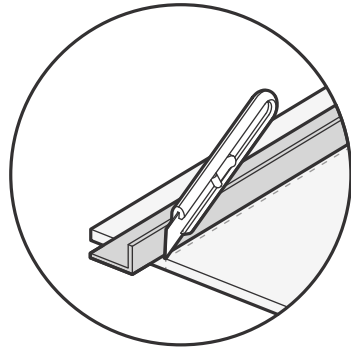


Butt Join and Bevels

If panels are to be installed butt-joined, we recommend a beveled edge as standard to conceal any surface irregularities.

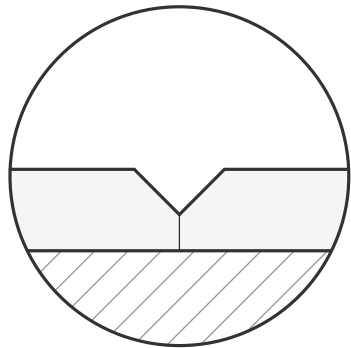


Butt Joins and Trims

If panel edges are untreated, joins between panels should be detailed with a Tee Joiner. Please refer to Edging Solutions Product Guide for further details.

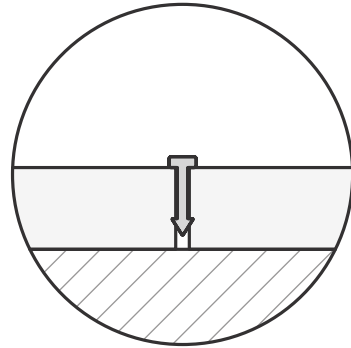


Edge Trims

Edge trims can be installed around the panel perimeter. Please refer to the Edging Solutions Product Guide for further details.

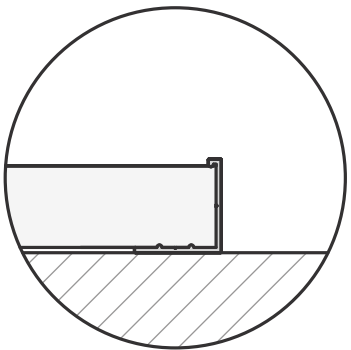


Power Outlets and Light Switches

Measure and cut out where the outlet would sit on the panel. Apply the panel to the substrate and secure the outlet through the panel.

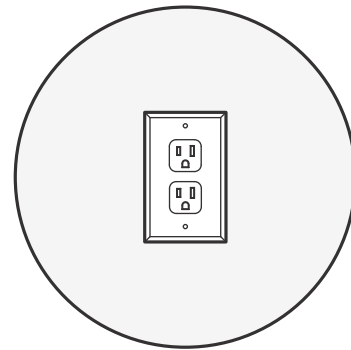

Internal Corners

We recommend a simple lap-join for internal corners.

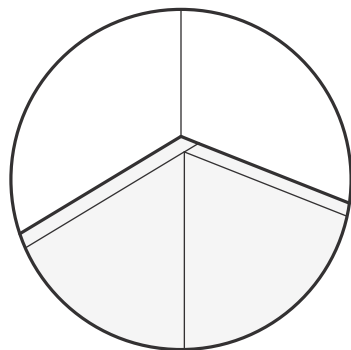

For further installation details, please refer to the Cube Acoustic Panel Installation Guide.






Colors

Cube™ Colors

Cube Acoustic Panels are available in a diverse color palette to suit a wide range of spaces and aesthetics.

Cube and Vertiface® crossover matches are available; see Color Guide for further details.

Surface finishes such as Mirage™ are also available, see [pages 7-9](#).

								
Pavilion	Opera	Parthenon	Senado	Beehive	Terrace	Canyon	Petra	Sargazo
								
Savoye	Colosseum*	Rushmore*	Flatiron*	Cavalier	Falling Water	Marina	Muralla	Pinnacle
								
Acros	Park	Highland	Gherkin	Tree House	Caspian	Herald	Empire	Petronas


*Mirage finish does not translate as well on heavily marbled colors such as Colosseum, Rushmore, and Flatiron. Please contact your Momentum account manager for more information.




Surface Finishes

Stone Finishes

Our Stone finishes collection features an assortment of colors and grains that represent stones popular in modern interior design. Selected for their timeless and refined look, these stone finishes provide a sleek aesthetic without compromising on acoustics.



Carrara




Statuario




Statuario Rose



Travertine




San Pedro



Rojo Alicante



Empress Green



Fossena

Texture Finishes


Texture finishes allow you to add character to any space while improving the occupants comfort, engagement, and help promote creativity. For example, Canvas and Cork will create a natural feeling whilst Concrete and Oxide offer a more industrial finish.



Beige Stucco



Canvas



Rattan



Weave



Cork



Oxide




Grey Stucco



Concrete

Pattern Finishes

Welcome people into a space through the use of Pattern finishes. Choose from intricate designs that add subtle detail to bolder options to create an impression.



Palms



Tessellate



Flax



Leaves



Dots



Ziggurat



Columns



Arches



Surface Finishes

Emma Hayes

White and Colored Core

Beautiful textiles collide with beautiful acoustics in the Autex Acoustics x Emma Hayes collection.

Please note that white and colored core panel edges are exposed. Edging solutions are available, contact your Momentum account manager for more information.



Veil
'Rose'




Vine
'Charcoal'




Nebula
'Mist'



Lakeside
'Daydream'



Modulations
'Shadow'



Sediment
'Forest'



Eos
'Blush'



Eos
'Shadow'



Dispersion 'Air'
(Opera core)



Dispersion 'Storm'
(Opera core)



Dispersion 'Dusk'
(Terrace core)



Dispersion 'Terra'
(Canyon core)




Wash 'Air'
(Opera core)



Wash 'Dusk'
(Terrace core)



Wash 'Ocean'
(Muralla core)



Wash 'Forest'
(Gherkin core)



Dune 'Air'
(Opera core)



Dune 'Dusk'
(Terrace core)



Dune 'Ocean'
(Muralla core)



Dune 'Forest'
(Gherkin core)



Color Field
'Air'
(Opera core)



Color Field
'Dusk'
(Terrace core)




Color Field
'Ocean'
(Muralla core)




Color Field
'Forest'
(Gherkin core)

Mirage™ Textured Panels


Transform your space into a tactile landscape with Mirage™, an intricately textured finish designed to create a sensory experience. The six refined designs bring depth, sophistication and a sense of movement to any interior design.




Lapis




Mortar




Rammed earth



Boucle



Offset



Brutalist



Surface Finishes

Acoustic Timber™

Acoustic Timber™ finishes are designed to realistically imitate timber.


To ensure a natural, high-end finish, we have hand-picked a selection of premium woodgrains taken from real timber veneers—digitally printed onto the panel surface with a safe, UV cured ink.

*Eucalyptus, Tasmanian Blackwood, and Queensland Walnut are recommended for baffles-only applications. Please contact your Momentum account manager for more information.

								
Birch	American Ash	Tasmanian Oak	Boston Oak	Natural Oak	Coffs Blackbutt	Civic Oak	Prime Oak	Grey Ironbark
								
Soft Walnut	Coastal Oak	Nordic Oak	Whitewash Gum	Aged Oak	Tasmanian Blackwood*	Queensland Walnut*	Jarrah	Yakisugi Black
								
Eucalyptus*	Hoop Pine	Oak	Australian Blackbutt	Black Walnut	Blue Gum			

Solid Color

The Solid Color range gives you access to color finishes across the whole spectrum. With paint, CMYK, and Pantone matching available, you can now be as bold or as subtle as you want.

								
BC0034	BC0035	BC0036	BC0031	BC0032	BC0041	BC0037	BC0029	BC0033
								
BC0026	BC0027	BC0028	BC0030	BC0039	BC0038	BC0040		



Color Light Reflectance Values

Cube LRVs are measured in accordance with BS 8493:2008+A1:2010

Acros	40
Beehive	33
Canyon	19
Caspian	6
Cavalier	12
Colosseum	52
Empire	5
Falling Water	34
Flatiron	24
Gherkin	8
Herald	13
Highland	19
Marina	36
Muralla	9
Opera	49
Park	23
Parthenon	33
Pavilion	80
Petra	16
Petronas	2
Pinnacle	3
Rushmore	41
Sargazo	4
Savoye	46
Senado	44
Terrace	24
Tree House	3





Sound Materials

We're on a positive journey towards momentous change. It's about winning for the planet and its people, making a difference for healthy generations to come.

Sustainability is ingrained in everything we do, from fiber to finish. Our commitment to doing good now and in the future drives us to continuously evolve our practices, design with integrity, and take responsibility for the impact of our products. Our five sustainability pillars reflect this ethos, guiding our actions and shaping our decisions. Together, these pillars form a system that ensures our materials, products, and processes contribute meaningfully to a more sustainable world.



01



Climate change demands climate action

We are carbon neutral in everything we do.

02



Closing the loop

We are advocates for closing the loop on waste. We design with circularity front of mind.

03



Sustainable supply chain

We carefully select responsible suppliers and take action to mitigate unethical practices, and encourage good working conditions.

04



Supporting wellbeing in buildings

All our products are made using only safe materials. No harmful chemicals are present in our products.

05



Operating a business for purpose and profit

We strive to have a positive impact on our environment, our people, and the next generation.

Credentials

Sustainability isn't just a feature—it's a foundation. Our products are independently certified by trusted third-party certifications and labels to meet rigorous environmental and performance standards.

Our products also meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project.



Declare





Our Journey to Nature Positive

We want to make a material difference to the planet and its people. That's why we're not resting on achieving carbon neutrality across the organization and our products.

We're on a journey committed to Nature Positive, which ultimately delivers systems and products that contribute to biodiversity replenishment, carbon sequestration, and many positive environmental outcomes.

It's manufacturing that cares for human beings and the generations to come.

1967

Founded in Auckland, NZ, creating underfelt for the flooring industry.



1990

Established on-line recycling systems.



2020

Dematerialization project, which reduced raw material by 30% for core product.




2017

First Environmental Product Declarations (EPDs) were published and started measuring GHG emissions.



2012

Reclaimed waste trimmings, reducing raw material use and associated emissions.

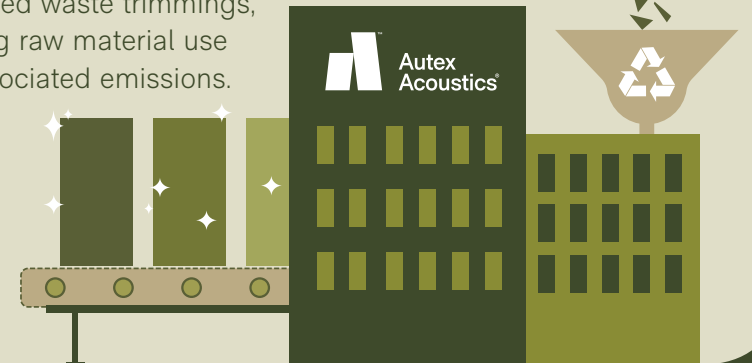


2021

We balanced all emissions from our acoustic products to zero.



0t

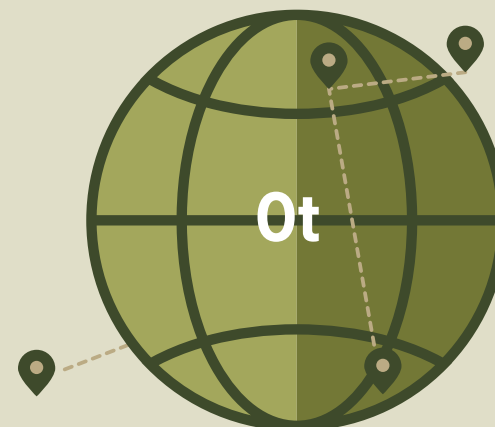

2022

We balanced all emissions from our global operations to zero.

-19lbs



2025

We received the first NaturePositive+ Declaration in the construction industry for our first carbon negative product we launched in New Zealand. It uses a material with a -8.6 CO₂e carbon footprint.



Technical Information

Overview

NRC	0.30 - 0.80
Content	100% PET, min. 80% recycled
Form	Panel
Dimensions	48" x 111.8" (1220mm x 2840mm)
Thickness	3/8" (9mm) and 1" (24mm)
Origin	Fabricated in the USA

Acoustic Performance

Cube Acoustic Panels are specifically designed to reduce and control reverberation and echo noise in building interiors.

Practical Sound Absorption Coefficients

	Frequency (Hz)	125	250	500	1000	2000	4000	NRC
3/8" Cube		0.00	0.05	0.15	0.40	0.70	0.85	0.30
3/8" Cube (with SpinFix 1/4" air gap)		0.00	0.05	0.15	0.45	0.75	0.95	0.35
3/8" Cube (with 1/4" air gap)		0.00	0.05	0.15	0.45	0.75	0.95	0.35
3/8" Cube (with 1" air gap)		0.05	0.10	0.35	0.75	0.95	0.95	0.55
1" Cube		0.05	0.20	0.60	0.90	1.00	1.00	0.70
1" Cube (with SpinFix 1/4" air gap)		0.05	0.20	0.65	0.95	1.00	1.00	0.70
1" Cube (with 1" air gap)		0.15	0.40	0.85	0.95	0.95	0.95	0.80


Fire Considerations

ASTM E-84-15a: **Class A rating**
(Tests RJ9445F-1a, T2604-13, T2604-12, RJ4479-1, and RJ4479-2)

CAN/ULC-S102 (Test QA-2243F-3) 3/8" only

Fire test reports available on request.

Twenty Year Manufacturer's Guarantee

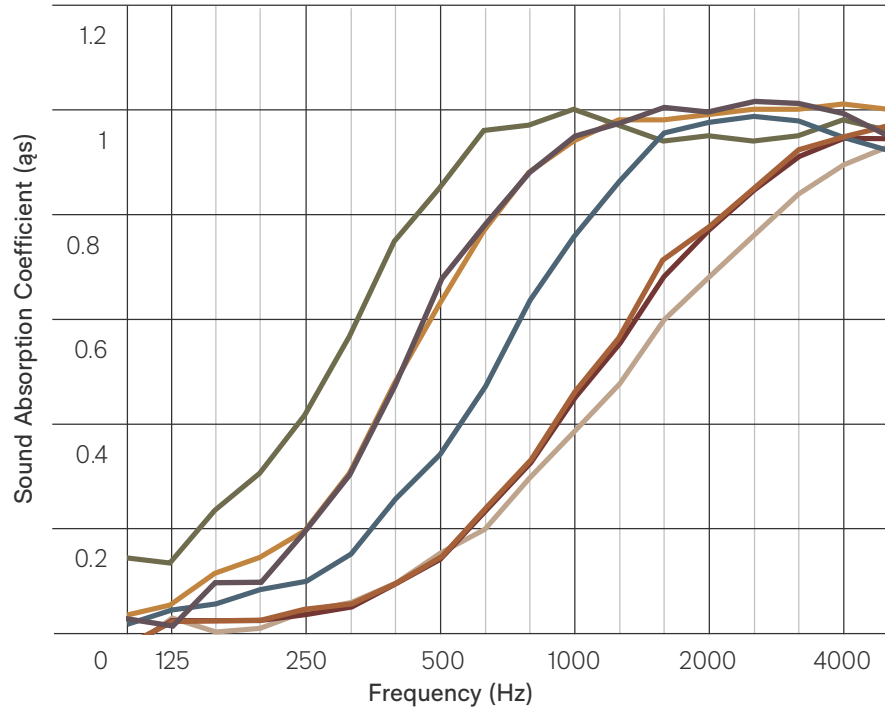

Product Specifications

Hard body impact	There is no surface damage or penetration when subjected to hard body impacts. When adhered to 0.39" (10mm) plasterboard, the system can resist a 9 joule impact.
Soft body impact	There is no surface damage or penetration when subjected to soft body impacts. When adhered to 0.39" (10mm) plasterboard, the system can resist a 70 joule impact.

Microbial resistance (ASTM G21-15):
Growth rating: 0

Color fastness to light (ISO 105-B02:2014):
Rating: 6

Determination of colorfastness to rubbing (ISO 105-X12:2016):
Dry assessment: 4 - 5
Wet assessment: 4 - 5

Average % of water vapor sorption by weight after four days: 0.4%

For care and maintenance guidance, refer to the Autex Acoustics Care and Maintenance Guide.

