



**Product overview**

Acoustic Timber™ Panel™ is a versatile acoustic panel designed for a variety of interior applications. Available in 12 mm, 24 mm, and 25 mm thicknesses, Acoustic Timber Panels are lightweight and semi-rigid—made from 100% polyester fibre. Acoustic Timber Panels are customisable with Precision Cut, and Peel ‘n’ Stick, for ease of install.

**Sustainable material**

- Carbon neutral product and manufacturing
- Zero waste manufacturing initiative
- Recycled content - >75% recycled material
- Low VOC and CDPH compliant - <0.092 mg/m<sup>3</sup> (7 days)
- Sustainable supply chain and anti-modern slavery

**Environmental certifications**

- EPD – compliant with ISO 14025 and EN 15804
- Declare – Red List free (third party verified)
- ISO 14001 Certified Environmental Management
- Health Product Declaration
- CDPH Standard



**Certifying your green building**

Autex Acoustics® products meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project. For support and guidance on available rating system points please visit [autexacoustics.co.nz](http://autexacoustics.co.nz), or speak with your Autex Acoustics account manager.

**Suitable applications**

Suitable for use as acoustic and decorative treatments in non-contact areas. For applications where contact is likely to occur, Autex Acoustics recommends our standard Cube™ or Quietspace® Panel range. If you have any concerns about the install location, please contact your Autex Acoustics account manager.

**Specification**

(Wall) treatment shall be Acoustic Timber Panel from thermally bonded high density polyester with timber grain running the length of the panel, containing not less than 80% recycled material as manufactured by Autex Acoustics [autexacoustics.co.nz](http://autexacoustics.co.nz)

Panel 1200 x 2400 x ( )mm (nom.) depth, colour ( ), sound absorption 12 mm: Class D, NRC 0.45 – with 25 mm air gap: Class C, NRC 0.70. 24 mm: Class D, NRC 0.70 – with 25 mm air gap: Class C, NRC 0.80. 25 mm: Class C, NRC 0.85.

Fire rating ASTM E-84: Class A, ISO 9705: Classification: Group 1-S, AS ISO 9705 – 2003 Classification: Group 1, 12 mm: BS EN 13501-1:2018 B - s2, d0, 24 mm: BS EN 13501-1:2018 B - s2, d2, 25 mm: BS EN 13501-1:2018 B - s2, d2.

If Acoustic Timber Panels are to be specified for use other than as a wallcovering, please seek guidance from your Autex Acoustics account manager.



## Product specifications

<b>Product name</b>	Acoustic Timber Panel
<b>Content</b>	100% polyester fibre
<b>Panel dimensions</b>	1200 mm x 2400 mm 1200 mm x 2700 mm
<b>Tolerance</b>	(+/- 0.5 mm) x (+/- 0.5 mm)
<b>Thickness</b>	12 mm 24 mm 25mm
<b>Tolerance</b>	(+/- 6%) (+/- 6%) (+/- 6%)

## Thermal performance

(Internally tested by Autex Lab)

Acoustic Timber Panel 12 mm	R0.31 (@15°C)
Acoustic Timber Panel 24 mm	R0.62 (@15°C)
Acoustic Timber Panel 25 mm	R0.66 (@15°C)

## Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website. If Acoustic Timber Panels are to be specified for use other than as a wallcovering, please seek guidance from your Autex Acoustics account manager.

## Product specifications

### Fire ratings

Acoustic Timber Panel is made from Cube™ and QuietSpace® Panel which has been tested and evaluated using the following test methods.

### ISO 9705: 1993

Classification: Group 1-S

Smoke production rate:  
<5.0m<sup>2</sup>/s

As required by NZBC C/VM2

### AS ISO 9705 - 2003

Classification: Group 1  
(SMOGR<sub>Arc</sub>): <100m<sup>2</sup>/s2

Assessed using methodology AS ISO 9705 - 2003 in accordance with AS 5637:2015, required by NCC Specification 7: Fire Hazard properties: S7C4 FI 4974  
FAR 4055

### BS EN 13501-1:2018

Wall applications

Classification: B-s2,d0  
(Cube™ 12 mm)

Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 15102:2007 + A1:2011. EUI-20-000268-A

Wall applications

Classification: B-s2,d2  
(Cube™ 24 mm)

Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 15102:2007 + A1:2011. EUI-21-000135-G-A

Wall applications

Classification: B-s2,d2  
(25 mm QuietSpace® Panel)

Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 15102:2007 + A1:2011. EUI-21-000135-E-A

Ceiling applications

Classification: B-s2,d0  
(Cube™ 12 mm)

Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 13964:2014. EUI-20-000268-B

Ceiling applications

Classification: B-s2,d2  
(Cube™ 24 mm)

Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 13964:2014. EUI-21-000135-G-B

Ceiling applications

Classification: B-s2,d2  
(25 mm QuietSpace® Panel)

Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 13964:2014. EUI-21-000135-E-B

### ASTM E-84-15a

Class A, FS:0 - SD:45  
(Cube™ 1/2")

RJ4479

Class A, FS:0 - SD:65  
(Cube™ 1")

RJ4479

### ASTM E84 - 14

(1" QuietSpace® Panel)  
Class A, FS:0 - SD:10

RJ3297

### Water vapour sorption

ASTM C1104 / C1104M-13a

Test conditions: 49°C, 95%RH

Water vapour absorbed and adsorped after 4 days:  
0.4% by weight

### Impact resistance

Print may show surface damage when subjected to impacts. We would advise against using Print in areas where there is likely to be contact with the product.

### Microbial resistance

ASTM G21-15

Growth rating: 0 (No growth)

Acoustic Timber Panel does not promote the growth of moulds and mildew.

### Colour fastness to light

Acoustic Timber Panels are suitable for indoor use only.

Light fastness is dependent on use and exposure.

Acoustic Timber Panel has been evaluated to the following standard:  
ISO 105-B02:2014

Rating: 6 (Highest = 7)

### Pattern repeat

Acoustic Timber Panels are made to replicate Timber grains and there is a variation from panel to panel to provide the natural look. there is no pattern repeat from panel to panel.

Acoustic Timber Panels will be manufactured ready for butt joining along the vertical joints.

We recommend cutting through the face of the panel using a straight edge to ensure

a straight cut.

Where possible, please place the straight edge on the excess of the panel to reduce friction and rubbing on the part of the panel that is to be installed.

### Blemishes

Due to the nature of the raw material and the manufacturing process, flecks and other small surface blemishes may be visible on the surface of Autex Acoustics panels from time to time. This is an inherent characteristic of the textile products and is unavoidable.

### Fabric care

Avoid contact with the Acoustic Timber Panel surface. Where liquids and other contaminants come in contact with the panels, these should be gently removed immediately and not allowed to soak-in, dry, or set. Refer to the product Care and Maintenance for cleaning guidance. Consult a specialist cleaning company for cleaning if required.

### Service

For further information about Acoustic Timber Panel or any other Autex Acoustics product, please contact your account manager or visit our website.

## Light reflectance values by colour

Acoustic Timber Panel is suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

W1 Birch	58	W21 Black Walnut	15
W3 Oak	37	W30 Yakisugi Black	3
W4 American Ash	53	W32 Aged Oak	34
W7 Queensland Walnut	15	W36 Soft Walnut	57
W8 Classic Oak	27	W37 Coastal Oak	42
W12 Tasmanian Oak	28	W39 Civic Oak	23
W18 Grey Ironbank	15	W41 Prime Oak	22



## Acoustic performance


Acoustic Timber Panel is made using Cube or QuietSpace Panel. The effect of the printed surface has been tested and found to have no impact on the acoustic performance of Cube or QuietSpace Panel.

	Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● 12 mm Cube		0.00	0.05	0.25	0.60	0.85	0.95	0.45
● 12 mm Cube (with 25 mm air gap)		0.05	0.30	0.60	0.95	0.95	0.85	0.70
● 24 mm Cube		0.05	0.20	0.60	0.90	1.00	1.00	0.70
● 24 mm Cube (with 25 mm air gap)		0.15	0.40	0.85	0.95	0.95	0.95	0.80
● 25 mm QuietSpace		0.15	0.45	0.85	1.00	1.00	0.95	0.85

Graph presents third octave sound absorption coefficients (according to ISO 354 measurement of sound absorption in a reverberation room). The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

### Absorption Coefficient According to ISO 354 University of Auckland Testing Service

Cube (12 mm) - Test No. T0712-3  
 Cube (12 mm with 25 mm air gap) - Test No. T0712-6  
 Cube (24 mm) - Test No. T1961-1  
 Cube (24 mm with 25 mm air gap) - Test No. T1326-2  
 QuietSpace Panel (25 mm) - test no. T0712-18

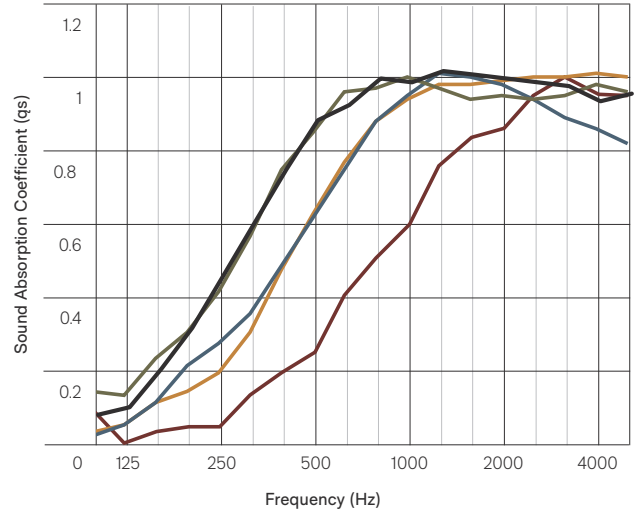

● **New Zealand**  
 702-718 Rosebank Road,  
 Private Bag 19988  
 Avondale 1746, Auckland  
 T 0800 428 839  
 T +64 9 828 9179  
[autexacoustics.co.nz](http://autexacoustics.co.nz)

● **Australia**  
 285 Swan Street,  
 Richmond, VIC 3121  
 T 1800 678 160  
 T +61 3 9450 6700  
[autexacoustics.com.au](http://autexacoustics.com.au)

● **United Kingdom**  
 Unit J4, Lowfields Way,  
 Lowfields Business Park,  
 Elland, West Yorkshire  
 HX5 9DA  
 T +44 0 142 241 8899  
[autexacoustics.co.uk](http://autexacoustics.co.uk)

● **United States**  
 1630 Dan Kipper Drive,  
 Riverside, CA 92507  
 T +1 424 203 1813  
[autexacoustics.com](http://autexacoustics.com)