



**Product:** 36 Inch Gas Range in Stainless Steel

**Model Number:** LRG3601U / LRG3601ULP

### TECHNICAL DETAILS

Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	120V
Circuit Breaker (A)	15 or 20A
Frequency (Hz)	60 Hz

### BURNER PERFORMANCE

Total Burners	6
[1] Front Left (Single)	18,000 BTU
[2] Front Middle (Single)	12,000 BTU
[3] Front Right (Single)	18,000 BTU
[4] Rear Left (Single)	9,000 BTU
[5] Rear Middle (Single)	12,000 BTU
[6] Rear Right (Single)	9,000 BTU
Tube Broil burner	10,000 BTU
U-shape burner (36" Oven)	18,500 BTU



### FEATURES & BENEFITS

- + **High-Powered BTU Burners:** The high-powered 18,000 BTU burner provides fast, intense heat for creating large family meals and restaurant-quality dishes.
- + **Large Oven Capacity:** 6.0 cu. ft. oven capacity can accommodate multiple dishes for enhanced cooking.
- + **Storage Space:** Storage drawer provides additional storage space for cooking trays and other kitchen utensils.
- + **Convection Fan:** Commercial convection fan provides controlled heat distribution for fast and efficient cooking.
- + **Even Heat Broiler:** Reflective gas tube broiler distributes heat evenly to sear your food and seal in the juices.
- + **Continuous Cast-Iron Grates:** Heavy-duty continuous cast-iron cooking grates that can handle any size cookware.
- + **Professional Knobs:** Black burner control knobs add style to the bold range design.
- + **Porcelain Spill Tray:** Single-piece black porcelain spill tray catches the mess and makes cleanup easy.
- + **Porcelain Interiors:** The gray porcelain oven interior adds a stylish touch and is easy to clean.

### ACCESSORIES (NOT INCLUDED)

Liquid Propane Gas Conversion Kit	LPKLRG3601U
Wok Ring	WK01
Cast Iron Reversible Griddle	RG1022



WARRANTY: 2 YEARS PARTS AND LABOR





#### PRODUCT DIMENSIONS


Product Width	36"
Product height (from bottom to top of back splash)	36 5/8" - 37 5/8"
Product height (from bottom to top of side panel)	36 1/8" - 37 1/8"
Product depth (from back panel to bullnose)	27 1/2"
Product depth (from back panel to control board)	27 1/16"
Product depth (from back panel to side panel front)	24 3/4"
Depth of control panel (minimum)	2 1/4"
Depth of control panel (bullnose)	3 9/16"
Adjustable Legs	Not to Exceed 1"

#### REQUIRED CUTOUT SIZE

36 1/8" x 24 3/4" x 35 5/8" (+1")

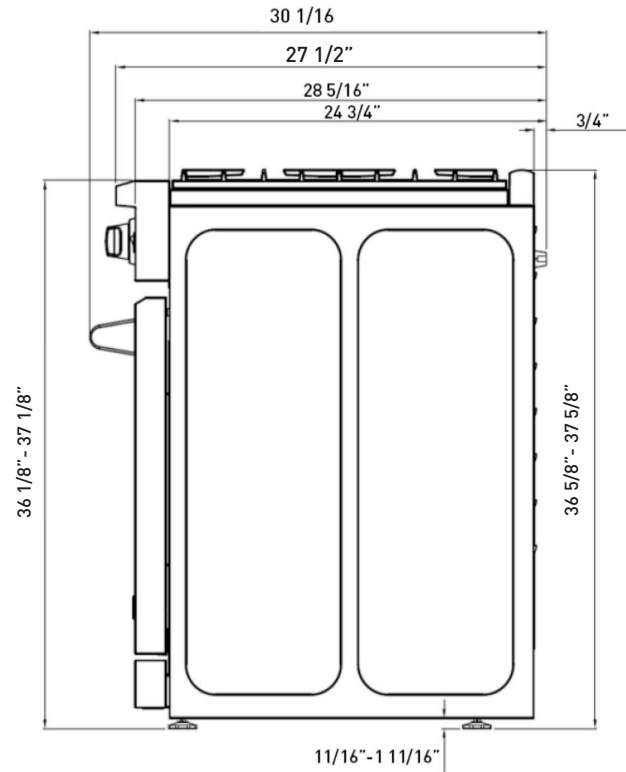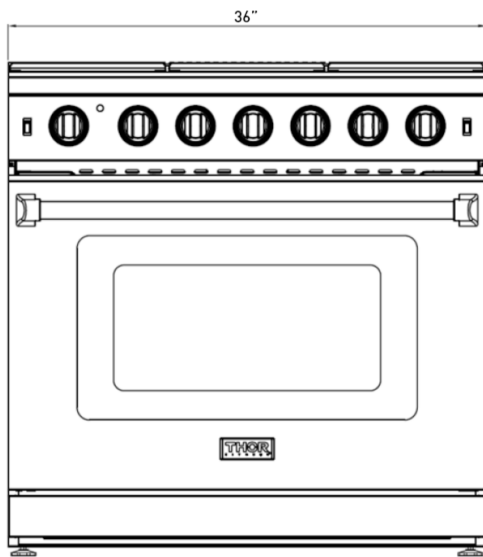

NG: Input Pressure: 7 inches,  
Output Pressure: 5 inches  
LP: Input Pressure: 11 inches  
Output Pressure: 10 inches  
Size of Regulator: 1/2 inch

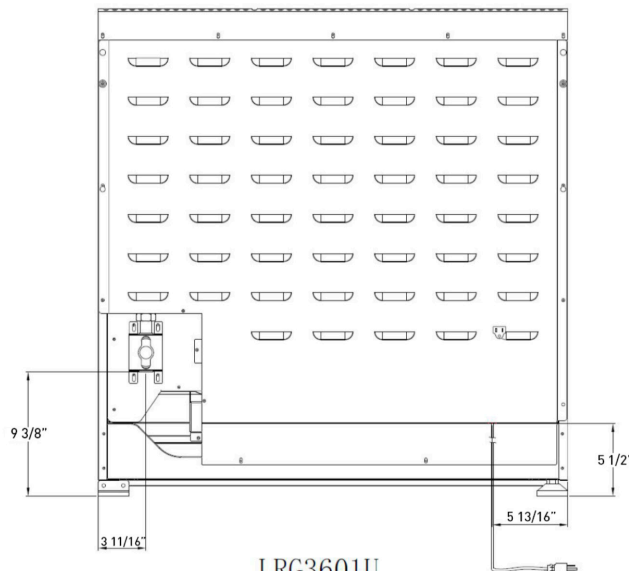

LRG3601U