



45° CORNER

NO SCALE

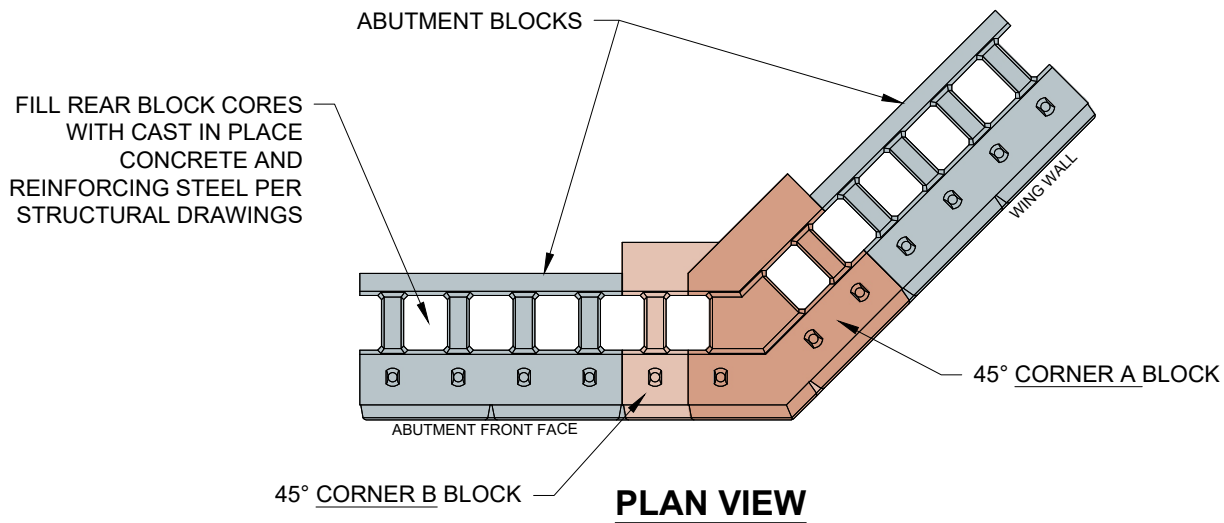

ABUTMENT FACE DIMENSIONS DICTATE THE INITIAL CORNER BLOCK SELECTION AT THE BOTTOM COURSE. THE INSTALLER SHALL ALTERNATE BETWEEN CORNER BLOCK A AND CORNER BLOCK B ON EACH SUBSEQUENT COURSE TO ESTABLISH A RUNNING BOND ALONG BOTH THE ABUTMENT FACE AND WING WALL RETURN.

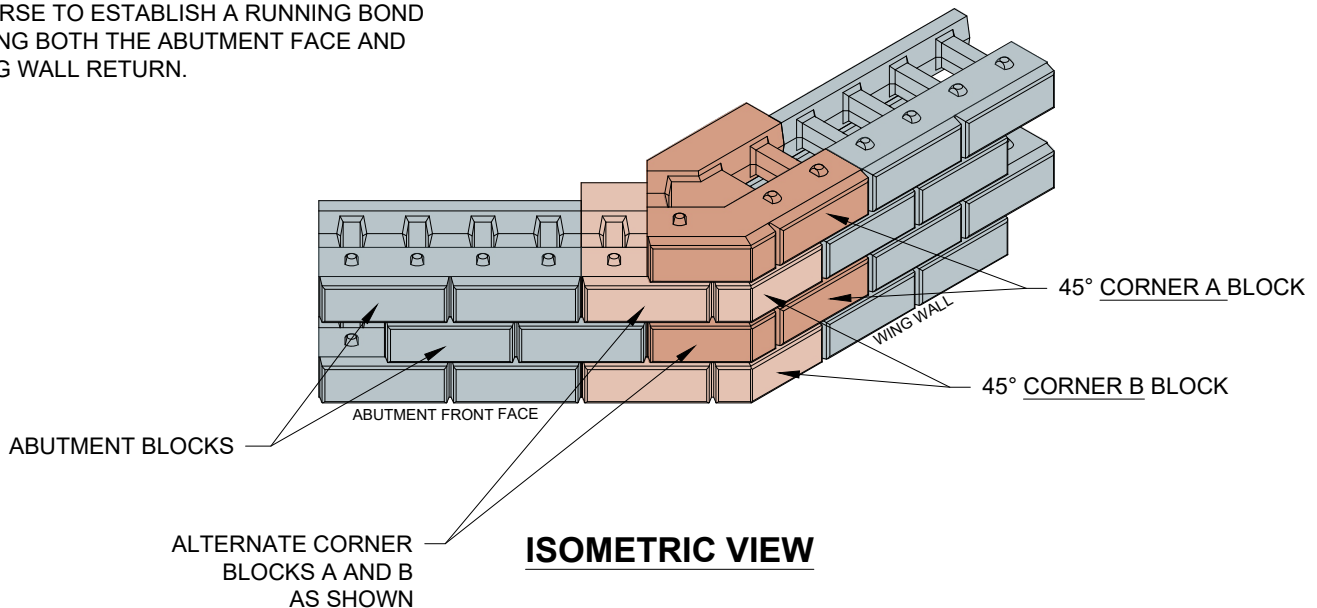

THIS DRAWING IS FOR REFERENCE ONLY. DETERMINATION OF THE SUITABILITY AND/OR MANNER OF USE OF ANY DETAILS SHOWN IS THE SOLE RESPONSIBILITY OF THE DESIGN ENGINEER OF RECORD. FINAL PROJECT DESIGNS, INCLUDING ALL CONSTRUCTION DETAILS, SHALL BE PREPARED BY A LICENSED PROFESSIONAL ENGINEER USING THE ACTUAL CONDITIONS OF THE PROPOSED SITE.

DRAWN BY: JACC	TITLE: 45° CORNER	Velpont[®] 8212 M-119 Harbor Springs, MI 49740 (866) 222-8400 ext 33010 engineering@asterbrands.com • www.velpont.com
DATE: 04-SEP-2026		
REVISION: REV 1		
PAGE: 1 of 1	FILE: Velpont_45_Degree_Corner_04SEP2026.dwg	