


PIPE INSTALLED THROUGH WALL DETAIL

NOT TO SCALE

REMOVE ONLY THE MINIMUM NUMBER OF BLOCKS REQUIRED TO FIT PIPE THROUGH WALL.

CONTROL JOINT.

REINFORCED CONCRETE COLLAR (CAST-IN-PLACE AROUND PIPE).

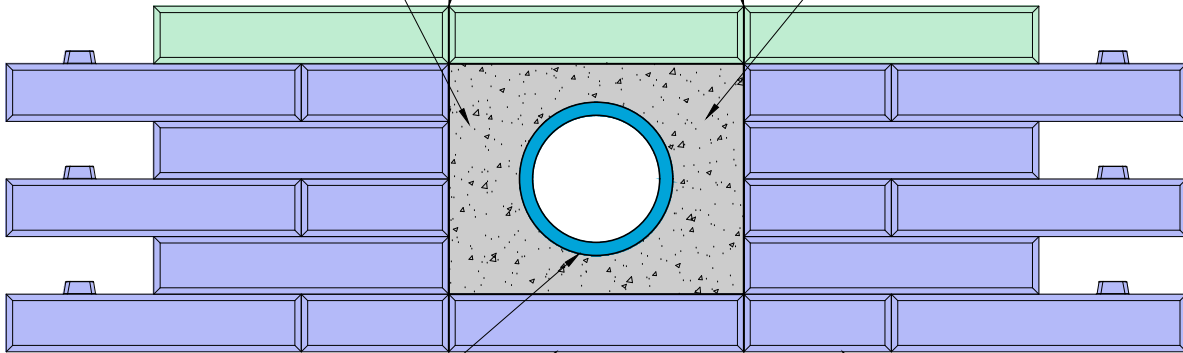

PIPE PROTRUDING THROUGH WALL (PIPE SIZE VARIES).

ELEVATION

LOWER COURSES OF NOVUM WALL BOCKS.


USE ADEQUATE MEASURES TO ADDRESS SCOUR, RUNOFF, AND OTHER ISSUES AT BASE OF WALL.

NON-WOVEN GEOTEXTILE FABRIC AROUND PIPE AND BEHIND COLLAR

REINFORCED CONCRETE COLLAR (CAST-IN-PLACE AROUND PIPE).

PIPE PROTRUDING THROUGH WALL (PIPE SIZE VARIES).

USE ADEQUATE MEASURES TO ADDRESS SCOUR, RUNOFF, AND OTHER ISSUES AT BASE OF WALL.

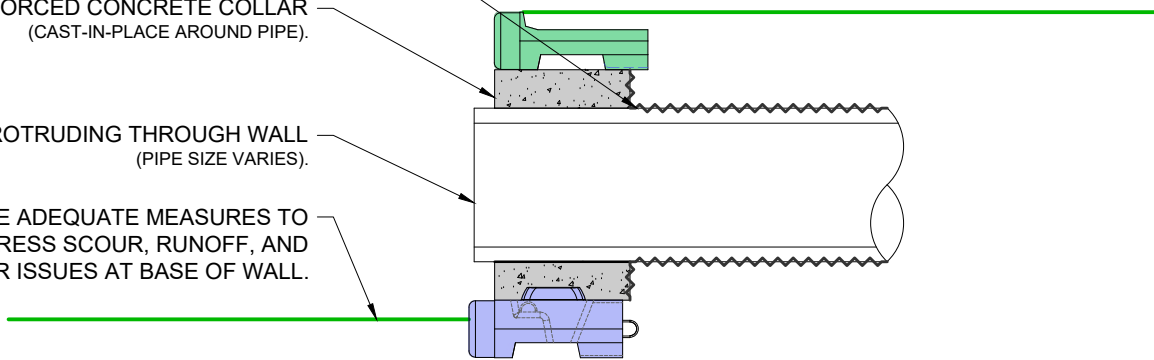

CROSS SECTION

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, internal and external stability, and drainage, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY:	EGS
APPROVED BY:	LBH
DATE:	10-MAR-2025
SHEET:	1 of 1

TITLE:	PIPE INSTALLED THROUGH WALL DETAIL
FILE:	Pipe_Installed_Through_Wall_Detail.dwg

NOVUM WALL™

3890 CHARLEVOIX AVE, PETOSKEY, MI 49720
(866) 222-8400 ext 33010 • engineering@redi-rock.com • www.novumwall.com