

Laser Displacement Sensor CD2H Series

By: **OPTEX**
FA CO., LTD.

CD2H SERIES



Best-in-Class, All-in-One Middle-Range Laser Displacement Sensors

First-in-class*

Repeat Accuracy

0.25 μm **Fastest-in-class***

Sampling Period

133.3

Highest-in-class* Repeat Accuracy and Sampling Period are achieved by originally developed ultra-sensitive C-MOS image sensor. These features contribute quality improvement and faster operation of production lines in a broad range of manufacturing.



CD2H Series is the C-MOS Laser Displacement Sensor that achieves the Fastest-in-class* Repeat Accuracy of 0.25 μm and Sampling Period up to 133.3 μs . The long-range models that are capable to measure in a distance up to 1,200 mm can be used in a wide range of application, such as measurement of a sheet-roll diameter and stack height. The OLED display and IO-Link are supported as standard. These are high-performance displacement sensors that support measurement requirements for high accuracy.

*Among laser displacement sensors with the repeat accuracy of 1 μm (Investigated by OPTEX FA in November 2021)

Application


Height Measurement of Mounted Components




Presence Detection of Electronics Components



Sealing Inspection of Cupped Foods

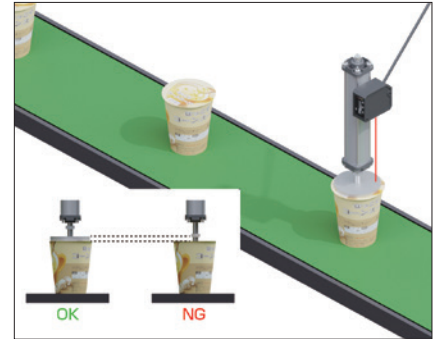


Wind-off Measurement of Secondary Battery Film

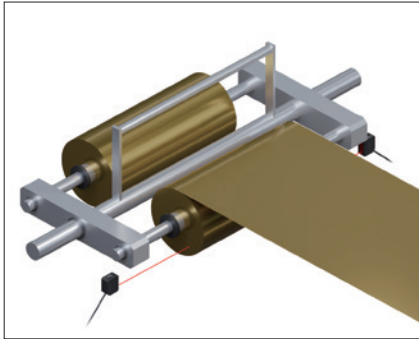


Detecting seal material on pressed products




Measurement of Automobile Body Position

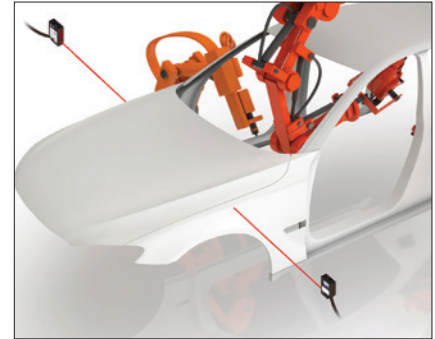

Transfer Robot Arm Sag Measurement

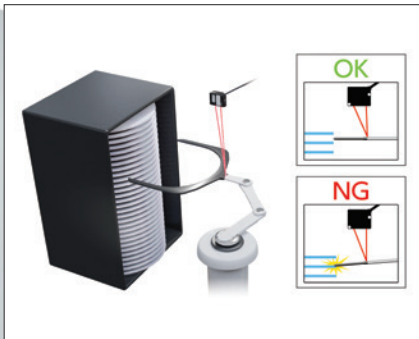

Carton Size Measurement

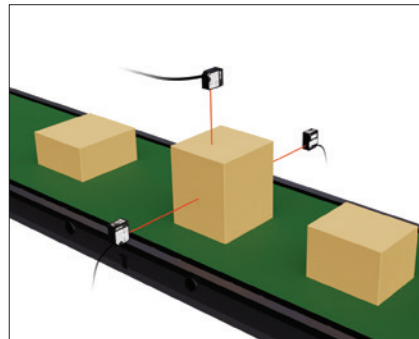


Stacked Bearing Height Measurement



Reasons for first-in-class performance

Equipped with the ATMOS image sensor




The Best-in-class preformation is achieved by the ultra-sensitive ATMOS image sensor that was originally developed for the most advanced displacement sensor, CDX Series. ATMOS: Auto Tuning C-MOS.

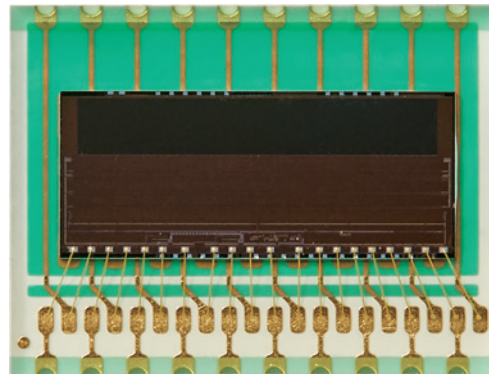

Only in the industry

Feedback-free high-speed shutter


The unique algorithm realizes measurement without feedback process. Real-time measurement is realized, as momentary errors of measurement and delay in response are eliminated.

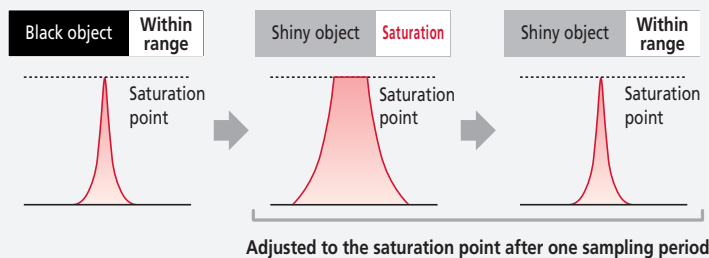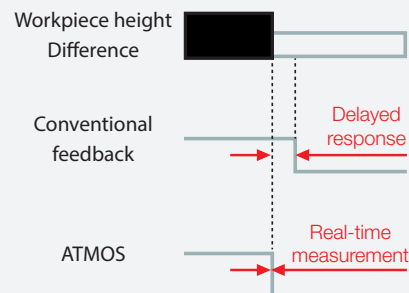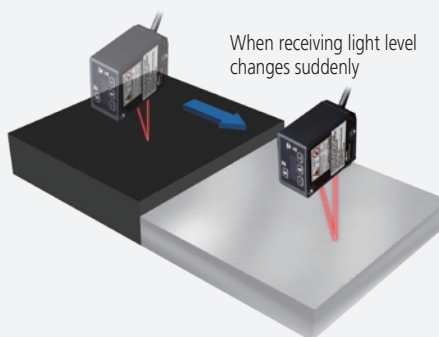

The shutter is closed just before the saturation point to stop receiving light, so that no feedback time is needed.

Fastest-in-class* repeat accuracy

Reliable detection is possible even in 1 μm steps.

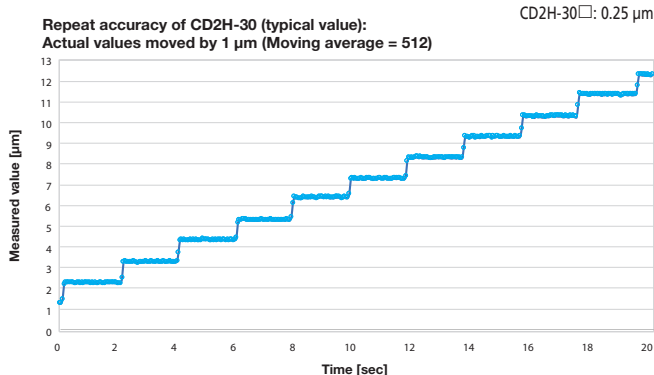

Fastest-in-class* Sampling Period*

CD2H Series

133.3 μs

Approx. 3.8 times faster!

conventional models

500.0 μs

Highest-in-class Linearity*

This is especially effective for measurement in a long distance or wide range.

Long distance 700 mm type: $\pm 0.1\%$ of F.S. (200 to 700 mm) / $\pm 0.3\%$ of F.S. (700 to 1200 mm)

Visualized various data on the display

Easy-to-read OLED display

Menu texts can be displayed in 7 languages. Display of measurement values can be selected among 3 modes of relative value, analog output value and bar graph.

Maintenance data, such as internal temperature and total operating time can be also displayed for predictive maintenance.

Relative Value

(Distance from a reference point)

Distance(rel.)
0.00mm

Analog value

Analog value
12.000mA

Bar graph display

Distance(bar)




Waveform of received light can be displayed

Monitoring of waveform helps to check amounts of received light and an installation angle. The masking function of unwanted ambient light is also available to reduce such interference.

Received light waveforms



*with amplifier built-in displacement sensors Investigated by OPTEX FA in December 2021.

Wide lineup of measurement ranges

Narrow measurement ranges of displacement sensors have required to adjust installation or model of the sensors to measure the distance to objects. CD2H-700 with the longest distance of measurement range of 700±500 mm reduces work and time of setup changes.

CD2H-700



700±500 mm (200 to 1200 mm)

RS-485 Type


Multi-drop support

Modbus RTU standard

Connection conditions:

- Connected units: Maximum 20 units
- Cable length: Maximum total length 70 m
- Baud rate: 1 Mbps or less

*The above connection conditions apply when the OPTEX FA option cable is used and there are no effects from noise. Depending on the cable used and the environment, there is the possibility that the above number of connected units or cable length cannot be fulfilled.

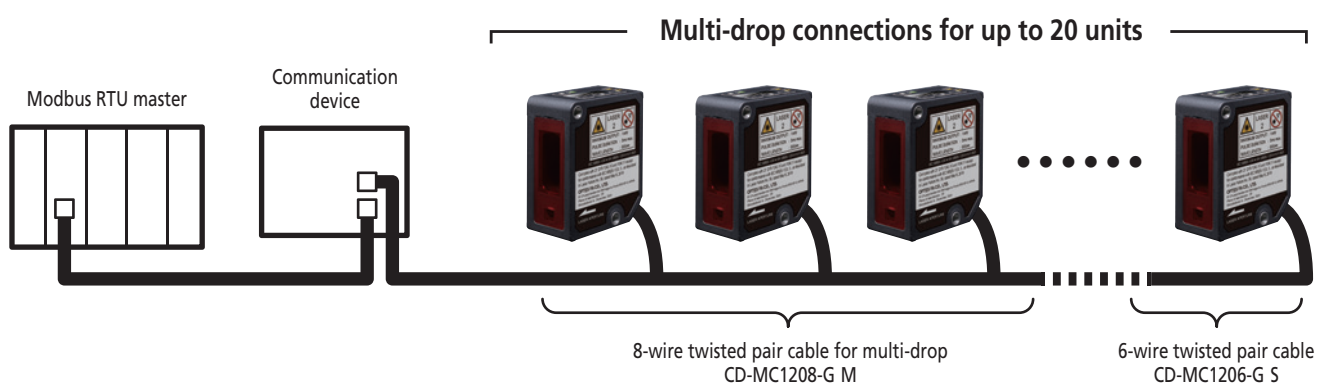

Buffering data storage of up to 16,000 measurements

- Level operation: Measured values are buffered at a particular time, or when an event occurs.
- Level (Input ON): Buffering occurs during external input.
- Level (Judgement ON/OFF): Buffering occurs while judgement is ON/OFF.
- Replay operation: Measurement values are buffered during external input or until immediately before the judgement changes.
- Replay (Input ON): Buffering starts when the power is turned on and stops on the rising edge of an external input.
- Replay (Judgement ON/OFF): Buffering stops when sensor judgement is switched ON/OFF

Image during level operation


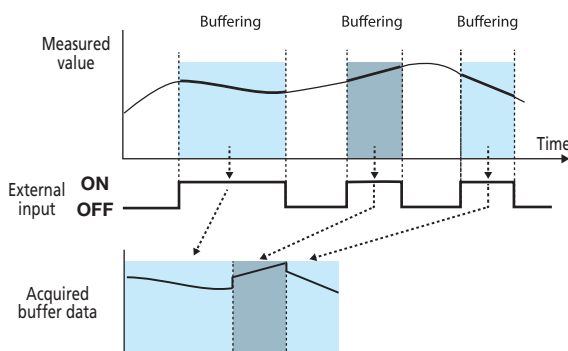


Image during replay operation

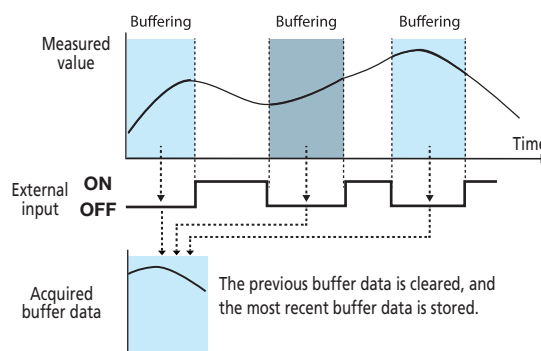


IO-Link communication supported **IO-Link**

IO-Link is one of technology that connects sensors and actuators to Industrial Ethernet using digital signals to promote smart factories. Measurement values can be obtained as digital values, reducing analog input. This enables noise immunity, cost reduction, and predictive maintenance.

Software CD2H_URES_Navigator for IO-Link/analog output type

Software is available to check measurement values, received light waveform and log measured values on a PC using our IO-Link Master (UR-E 16DT). It can be downloaded free of charge from our website.

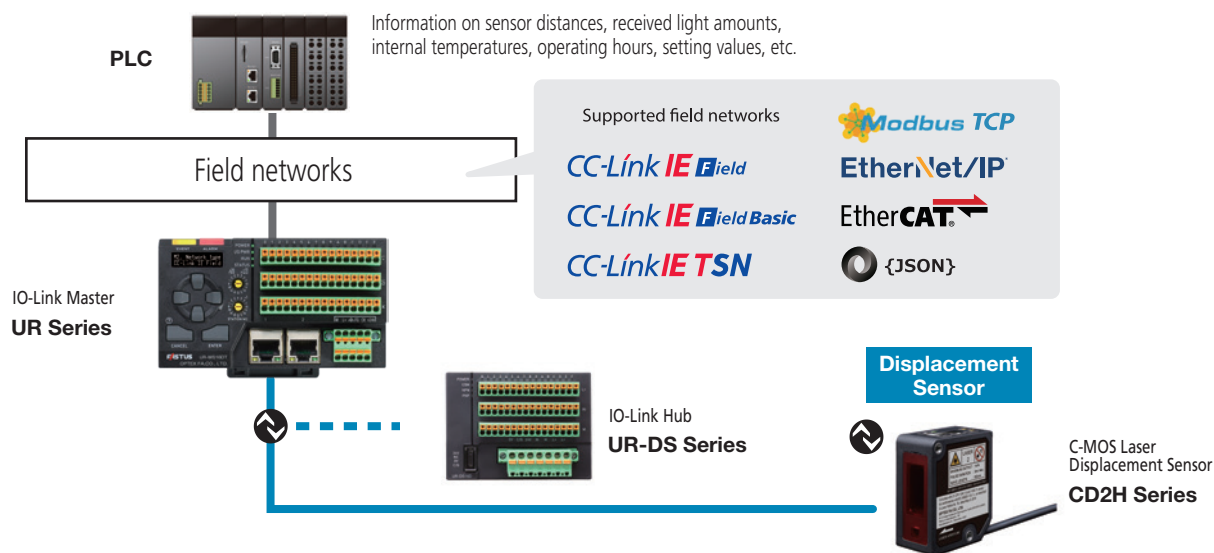


Software CD2H_RS485_Navigator for RS-485 type Software

Software is available to check measurement values, received light waveform and acquire buffering data on a PC by using a commercially available RS-485-USB converter. It can be downloaded free of charge from our website.

Applications (Buffering function)

Detection of Uneven Winding

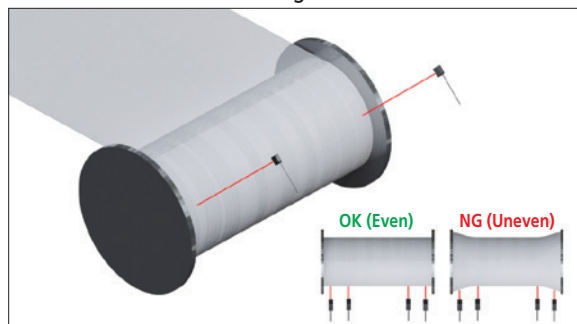

When CD2H judges that the wire is unevenly wound, buffering is stopped and the continuous data immediately before the wire became unevenly wound can be retrieved as buffered data.


Advantage 1

Device information status monitoring leads to predictive maintenance and reduced downtime.




Advantage 2

The storage of device information allows for immediate restoration even if the device is replaced, improving maintainability.




Advantage 2

Converts measured value to digital signals for transmission to PLC, making them resistant to noise and enabling long-distance communication.



Lineup

Reflection mode	Measurement range	Repeat Accuracy	Linearity	Light source Laser class	I/O	Connection	Model	Order No.
 Diffuse	 30±5 mm	0.25 μm	±0.1% of F.S.	Red semiconductor laser CLASS 1/Class I	Analog output 2 control outputs External input  IO-Link	Cable	CD2H-30A	64PMI332
					Pigtail Cable	CD2H-30M12A	64PMI333	
					Pigtail Cable	CD2H-30-485M12A	Contact Sales	
	 50±10 mm	0.25 μm	±0.1% of F.S.		Analog output 2 control outputs External input  IO-Link	Cable	CD2H-50A	64PMI334
					Pigtail Cable	CD2H-50M12A	64PMI335	
					Pigtail Cable	CD2H-50-485M12A	Contact Sales	
	 130±70 mm	4 μm	±0.1% of F.S.		Analog output 2 control outputs External input  IO-Link	Cable	CD2H-130	64PMI336
					Pigtail Cable	CD2H-130M12	64PMI337	
					Pigtail Cable	CD2H-130-485M12	Contact Sales	
	 245±175 mm	10 μm	±0.1% of F.S.	Red semiconductor laser CLASS 2/Class II	Analog output 2 control outputs External input  IO-Link	Cable	CD2H-2452	64PMI338
					Pigtail Cable	CD2H-245M122	64PMI339	
					Pigtail Cable	CD2H-245-485M122	Contact Sales	
	 350±250 mm	20 μm	±0.1% of F.S.		Analog output 2 control outputs External input  IO-Link	Cable	CD2H-3502	64PMI340
					Pigtail Cable	CD2H-350M122	64PMI341	
					Pigtail Cable	CD2H-350-485M122	Contact Sales	
	 700±500 mm	100 μm	±0.1% of F.S. (200 to 700 mm)		Analog output 2 control outputs External input  IO-Link	Cable	CD2H-7002	64PMI342
			±0.3% of F.S. (700 to 1200 mm)		Pigtail Cable	CD2H-700M122	64PMI343	
					Pigtail Cable	CD2H-700-485M122	Contact Sales	

Options/Accessories

Connector cables for IO-Link/analog output



Standard cables

64PMI326 — YF2A15-020VB5XLEAX Cable length: 2 m
64PMI327 — YF2A15-050VB5XLEAX Cable length: 5 m
64PMI328 — YF2A15-100VB5XLEAX Cable length: 10 m

Minimum bending radius: Cable diameter × 5 (when fixed in place)



Bending resistant cables

64PMI329 — DOL-1205-G02M-R Cable length: 2 m
64PMI329 — DOL-1205-G02M-R Cable length: 5 m

Minimum bending radius:
 Cable diameter × 2 (when fixed in place)
 Cable diameter × 6 (when movable)

Connector cables for RS-485 communication



6-wire twisted pair cables

Contact Sales — CD-MC1206-G2S Cable length: 2 m
Contact Sales — CD-MC1206-G5S Cable length: 5 m

Minimum bending radius:
 Cable diameter × 5 (when fixed in place)
 Cable diameter × 8 (when movable)



8-wire twisted pair cable for multi-drop


Contact Sales — CD-MC1208-G2M Cable length: 2 m
Contact Sales — CD-MC1208-G5M Cable length: 5 m

Minimum bending radius:
 Cable diameter × 5 (when fixed in place)
 Cable diameter × 8 (when movable)

I/O Circuit Diagrams


I/O-Link/analog output Type

NPN setting*1

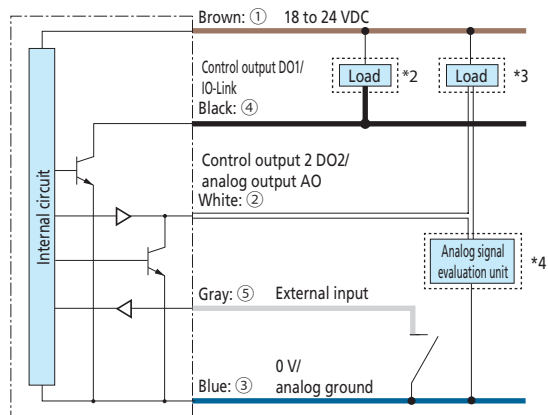


- *1. When using NPN settings for an IO-Link connection, use OPTEX FA's IO-Link Master UR Series or IO-Link Master with sink support.
- *2. When used as control output DO1
- *3. When used as control output DO2
- *4. When used as analog output AO

PNP setting

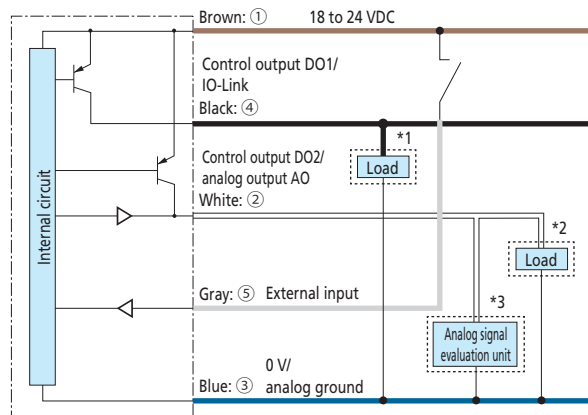


- *1. When used as control output DO1
- *2. When used as control output DO2
- *3. When used as analog output AO

Push-pull setting

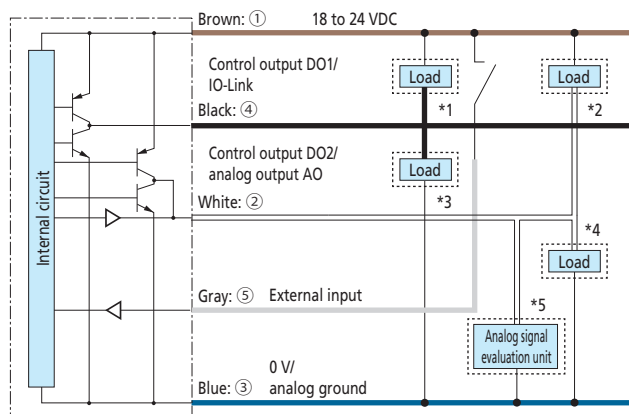


- *1. When used as control output DO1 with NPN connection
- *2. When used as control output DO2 with NPN connection
- *3. When used as control output DO1 with PNP connection
- *4. When used as control output DO2 with PNP connection
- *5. When used as analog output AO


M12 connector pin assignments

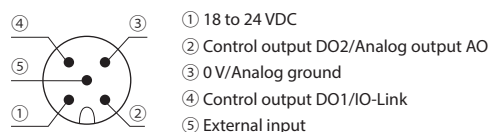


6-wire twisted pair cable (CD-MC1206-G□S)

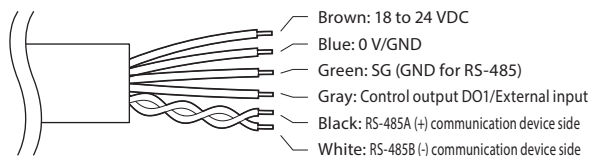

8-wire twisted pair cable for multi-drop (CD-MC1208-G□M)

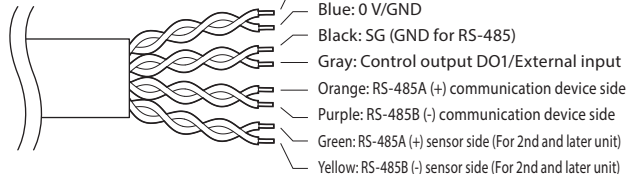


M12 connector pin assignments

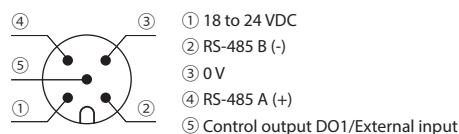

I/O Circuit Diagrams

RS-485 Type

NPN setting (when load is connected by NPN with the push-pull setting)

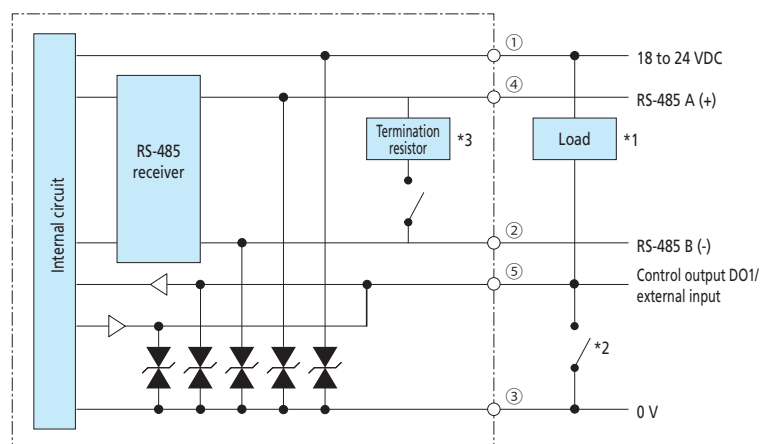


*1. When used as control output

*2. When used as external input

*3. Default setting for the termination resistor is ON.

When multi-drop connections are made, turn the termination resistor OFF at all units except the unit which is connected at the end.

PNP setting (when load is connected by PNP with the push-pull setting)

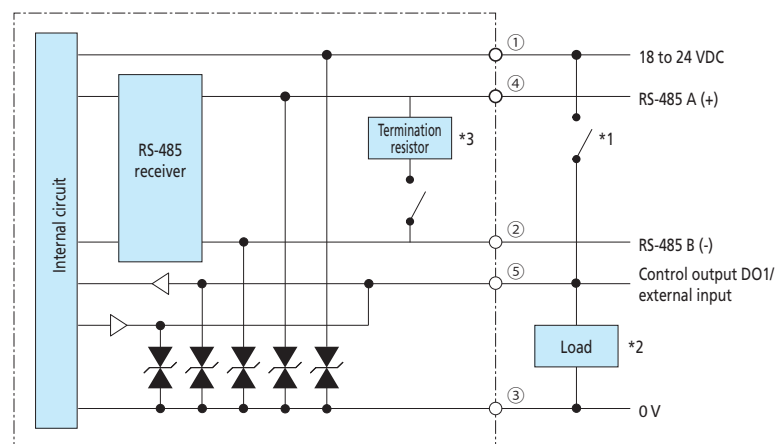


*1. When used as external input

*2. When used as control output


*3. Default setting for the termination resistor is ON.

When multi-drop connections are made, turn the termination resistor OFF at all units except the unit which is connected at the end.


M12 connector pin assignments

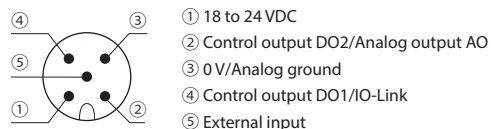


6-wire twisted pair cable (CD-MC1206-G□S)

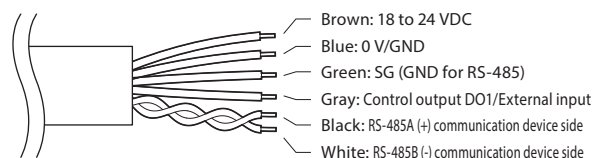


8-wire twisted pair cable for multi-drop (CD-MC1208-G□M)

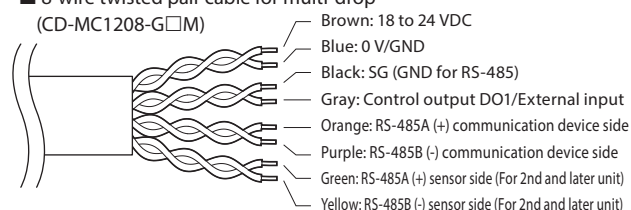

M12 connector pin assignments

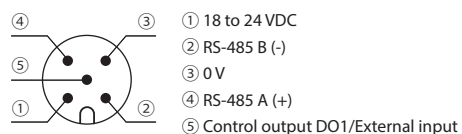

Dimensions

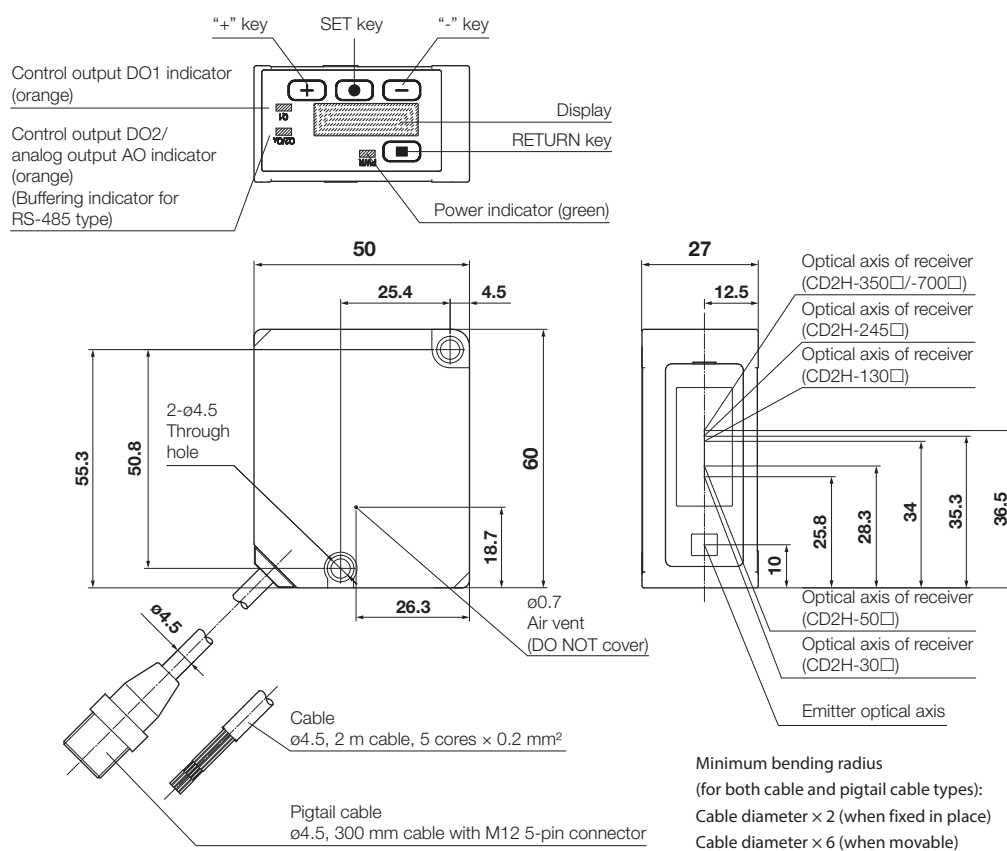

Connector cables for IO-Link/analog output

Standard cables


YF2A15-020VB5XLEAX

YF2A15-050VB5XLEAX

YF2A15-100VB5XLEAX

Minimum bending radius:

Cable diameter × 5 (when fixed in place)

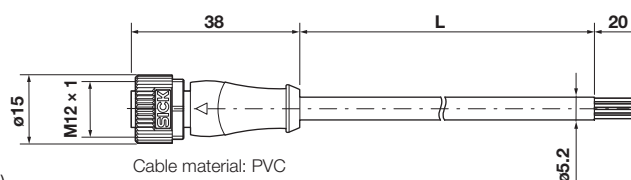

Cable material: PVC

Lead wire: 5 cores × 0.34 mm²

L = 2000 mm (YF2A15-020VB5XLEAX)

= 5000 mm (YF2A15-050VB5XLEAX)

= 10000 mm (YF2A15-100VB5XLEAX)

Bending resistant cables


DOL-1205-G02M-R

DOL-1205-G05M-R

Minimum bending radius:

Cable diameter × 2 (when fixed in place)

Cable diameter × 6 (when movable)

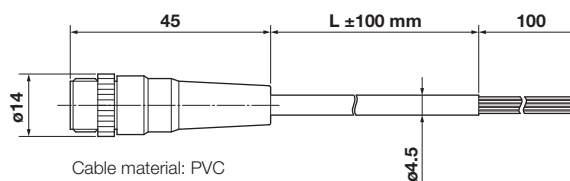

Cable material: PVC

Lead wire: 5 cores × 0.3 mm²

L = 2000 mm (DOL-1205-G02M-R)


= 5000 mm (DOL-1205-G05M-R)

Dimensions

Mounting bracket

BEF-WN-OD2000-B

(Unit: mm)

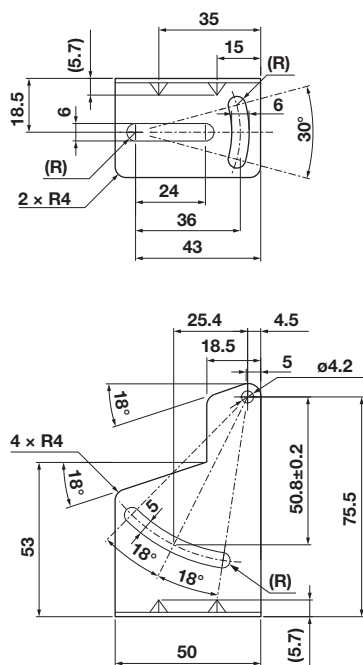

BEF-WN-OD2000-B
64PMI344

Installation example

Connector cables for RS-485 communication

6-wire twisted pair cable


CD-MC1206-G2S

CD-MC1206-G5S

Minimum bending radius:

Cable diameter × 5 (when fixed in place)

Cable diameter × 8 (when movable)

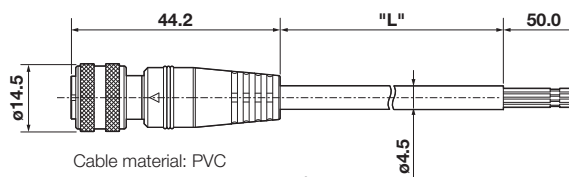

Cable material: PVC

Lead wire: 6 cores × 0.13 mm²

L = 2000 (CD-MC1206-G2S)

= 5000 (CD-MC1206-G5S)

8-wire twisted pair cable for multi-drop


CD-MC1208-G2M

CD-MC1208-G5M

Minimum bending radius:

Cable diameter × 5 (when fixed in place)

Cable diameter × 8 (when movable)

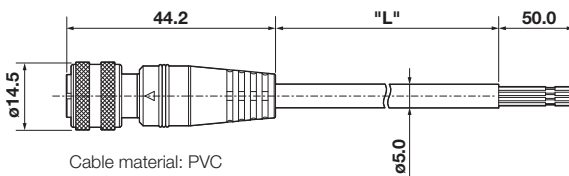

Cable material: PVC

Lead wire: 8 cores × 0.13 mm²

L = 2000 (CD-MC1208-G2M)

= 5000 (CD-MC1208-G5M)

Model Specification

IO-Link/analog output Type

Model	Cable	CD2H-30A	CD2H-50A	CD2H-130	CD2H-2452	CD2H-3502	CD2H-7002
	Order No.	64PMI332	64PMI334	64PMI336	64PMI338	64PMI340	64PMI342
	Pigtail cable	CD2H-30M12A	CD2H-50M12A	CD2H-130M12	CD2H-245M122	CD2H-350M122	CD2H-700M122
	Order No.	64PMI333	64PMI335	64PMI337	64PMI339	64PMI341	64PMI343
Center of measurement range		30 mm	50 mm	130 mm	245 mm	350 mm	700 mm
Measurement range		±5 mm	±10 mm	±70 mm	±175 mm	±250 mm	±500 mm
Light source	Medium	Red semiconductor laser					
	Wavelength	655 nm					
	Maximum output	0.39 mW			1 mW		
Laser class	JIS/IEC/FDA*1	CLASS 1/Class I			CLASS 2/Class II		
Spot size*2		ø50 µm	ø70 µm	ø0.3 µm	ø0.5 µm	ø0.6 µm	ø1.0 µm
Linearity		±0.1% of F.S.	±0.1% of F.S.	±0.1% of F.S.	±0.1% of F.S.	±0.1% of F.S.	±0.1% of F.S. (200 to 700 mm) ± 0.3% of F.S. (700 to 1200 mm)
Resolution*3		0.25 µm	0.25 µm	4 µm	10 µm	20 µm	100 µm
Repeat accuracy*4		0.25 µm	0.25 µm	4 µm	10 µm	20 µm	100 µm
Sampling period*5		133.3 µs/150 µs/200 µs/300 µs/500 µs/1 ms/2 ms/5 ms/Auto					
Temperature characteristics*6		±0.06% of FS/°C					
Weight		Cable models: Approx. 140 g Connector models: Approx. 90 g					
IO-Link	Specifications	Rev. 1.1					
	Baud rate	COM3 (230.4 kbps)					
	Number of process input data bytes	6 bytes					
	Minimum cycle time	0.7 ms					
Control output (DO1/DO2*7)	No. of outputs	2 (DO1 can be switched to IO-Link.)					
	Polarity	NPN/PNP, open collector or Push-Pull (selectable by setting) Max. 100 mA/24 VDC, residual voltage 1.8 V or less					
Analog output QA*7	Current	4 to 20 mA, load impedance: 300 Ω or less					
	Voltage	0 to 10 V, output impedance: 100 Ω or less					
External input*8		Switchable between Off, Multi operations, Hold, Zero point teach, and Laser off					
Connection		Cable: ø4.5 mm, 2 m cable Pigtail cable: ø4.5 mm, 300 mm cable with M12 5-pin connector Minimum bending radius: Cable diameter x 2 (when fixed in place), cable diameter x 6 (when movable)					

The measurement conditions are as follows unless otherwise designated:

Ambient temperature: 25°C (room temperature); supply voltage: 24 VDC; sampling period: 200 µs; moving average performed: 128; median filter: 31; center of measurement range, standard measured object (white ceramic). Furthermore, the sensor is fixed in place with an aluminum bracket when measurements are performed.

*1: In accordance with the FDA provisions of Laser Notice No. 56, the laser is classified per the IEC 60825-1:2014 standard.

*2: Defined with center strength 1/e² (13.5%) at the center of the measurement range. There may be leak light other than the specified spot size. The sensor may be affected when there is a highly reflective object close to the detection area.

*3: The smallest determinable step when changing the distance between the sensor and the target one step at a time (at moving average of 512)

*4: Peak to peak value of measurement in stationary state (at moving average of 512)

*5: Set to 200 µs by default.

*6: Typical example when the object (white ceramic) is measured while the object and the sensor are fixed in place with aluminum brackets. This object is placed at the center of the measurement range.

*7: Set to analog current output by default.

*8: Set to laser off by default.

Model Specification

RS-485 Type

Model		CD2H-30-485M12A	CD2H-50-485M12A	CD2H-130-485M12	CD2H-245-485M122	CD2H-350-485M122	CD2H-700-485M122
Order No.		Contact Sales	Contact Sales	Contact Sales	Contact Sales	Contact Sales	Contact Sales
Center of measurement range		30 mm	50 mm	130 mm	245 mm	350 mm	700 mm
Measurement range		±5 mm	±10 mm	±70 mm	±175 mm	±250 mm	±500 mm
Light source	Medium	Red semiconductor laser					
	Wavelength	655 nm					
	Maximum output	0.39 mW			1 mW		
Laser class		JIS/IEC/ FDA*1			CLASS 1/Class I		
Spot size*2		ø50 µm	ø70 µm	ø0.3 µm	ø0.5 µm	ø0.6 µm	ø1.0 µm
Linearity		±0.1% of F.S.	±0.1% of F.S.	±0.1% of F.S.	±0.1% of F.S.	±0.1% of F.S.	±0.1% of F.S. (200 to 700 mm) ± 0.3% of F.S. (700 to 1200 mm)
Resolution*3		0.25 µm	0.25 µm	4 µm	10 µm	20 µm	100 µm
Repeat accuracy*4		0.25 µm	0.25 µm	4 µm	10 µm	20 µm	100 µm
Sampling period*5		133.3 µs/150 µs/200 µs/300 µs/500 µs/1 ms/2 ms/5 ms/Auto					
Temperature characteristics*6		±0.06% of FS/°C					
Weight		Connector models: Approx. 90 g					
Communication specifications	Data transmission	RS-485 half-duplex communication, start-stop synchronization					
	Protocol	Modbus RTU					
	Baud rate	9600 bps/19200 bps/38400 bps/57600 bps/115.2 Kbps/230.4 Kbps/1 Mbps/2 Mbps/4 Mbps					
	Data length	8 bit					
	Parity	Even/Odd/None					
	Stop bit	1bit, 2bit					
Control output (DO1)	No. of outputs	1 (switchable to external input.)					
	Polarity	NPN/PNP, open collector or Push-Pull (selectable by setting) Max. 100 mA/24 VDC, residual voltage 1.8 V or less					
External input*7		Teach 1/Teach 2/Offset/Offset clear/Laser off/Input hold/Buffering/ Buffer clear/Rise: Teach 1, Fall:Teach 2/Rise Teach 2, Fall: Teach 1					
Connection		Pigtail cable: ø4.5 mm, 300 mm cable with M12 5-pin connector Minimum bending radius: Cable diameter × 2 (when fixed in place), cable diameter × 6 (when movable)					

The measurement conditions are as follows unless otherwise designated:

Ambient temperature: 25°C (room temperature); supply voltage: 24 VDC; sampling period: 200 µs; moving average performed: 128; median filter: 31; center of measurement range, standard measured object (white ceramic). Furthermore, the sensor is fixed in place with an aluminum bracket when measurements are performed.

*1: In accordance with the FDA provisions of Laser Notice No. 56, the laser is classified per the IEC 60825-1:2014 standard.

*2: Defined with center strength $1/e^2$ (13.5%) at the center of the measurement range. There may be leak light other than the specified spot size. The sensor may be affected when there is a highly reflective object close to the detection area.

*3: The smallest determinable step when changing the distance between the sensor and the target one step at a time (at moving average of 512)

*4: Peak to peak value of measurement in stationary state (at moving average of 512)

*5: Set to 200 µs by default.

*6: Typical example when the object (white ceramic) is measured while the object and the sensor are fixed in place with aluminum brackets. This object is placed at the center of the measurement range.

*7: Set to laser off by default.

Common Specification

Supply voltage		240818 to 24 VDC (±10%*1, including ripple)
Current consumption*2		80 mA (at 18 VDC), 70 mA (at 24 VDC)
Display		0.9-inch OLED displayMenu languages: English, German, Spanish, Japanese,Simplified Chinese, Traditional Chinese, Korean
Indicators		Power indicator (green), Output indicators (orange x 2),IO-Link communication indicator (flashing green)
Protection circuit		Reverse connection protection, overcurrent protection
Environmental resistance	Degree of protection	IP67 (including M12 connector of pigtail cable type)
	Ambient temperture/humidity	-10 to +50°C/35 to 85% RH (without freezing or condensation)
	Storage temperture/humidity	-20 to +60°C/35 to 85% RH (without freezing or condensation)
	Ambient illuminance	Incandescent light: 10000 lx Max. Fluorescent light: 10000 lx Max.
	Vibration resistance	10 to 55 Hz Double amplitude 1.5 mm, 2 hours in each X, Y, Z direction
	Shock resistance	500 m/s² (Approx. 50 G) 3 times in each X, Y, Z direction
Applicable regulations	EMC	EMC Directive (2014/30/EU)UK EMC (Electromagnetic Compatibility Regulations 2016)
	Environment	RoHS Directive (2011/65/EU),UK RoHS (The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012),China RoHS (MIIT Order No.32)
	Safety	FDA Regulations (21 CFR 1040.10 and 1040.11)*3
Applicable standards		EN 60947-5-2, IEC 60825-1
NRTL certification		UL Recognized Components Proximity Switch Certified for US and Canada
Company standards		Noise resistance: Feilen Level 3 cleared
Warm-up time		Approx. 30 minutes
Material		Housing: PBT, Front window: PMMA

*1: When used as an IO-Link device, do not use it at less than 18 VDC.

*2: For IO-Link/analog output type, value when DO2 is set to analog output (current) and measurement is not possible (outputting a current of 21 mA).

*3: Excluding differences per Laser Notice No. 56.

Precautions for Laser Use


This product emits a Class 1 or Class 2 visible laser beam that is compliant with JIS C6802/IEC 60825-1/FDA laser safety standards. Labels for applicable standards are affixed to the product.

Type	Red semiconductor laser
Wavelength	655 nm
Maximum output	0.39 mW (CLASS 1) 1 mW (CLASS 2)

Exports to the United States

If this product will be exported to the United States, approval must first be obtained from the FDA (Food and Drug Administration), the laser regulating body of the United States. A report for this product has been submitted to the CDRH (Center for Devices and Radiological Health). If this product will be exported to the United States, please stick or replace the attached label on the product.

Laser Class 1



Symbol	Meaning
	Laser emission
	Class 1 laser products
	Laser aperture

Laser Class 2



Symbol	Meaning
	Laser emission
	Class 2 laser products
	Do not look directly at the beam
	Laser aperture

Coordinate Measuring Machines



Vision Measuring Systems



Form Measurement



Optical Measuring



Sensor Systems



Test Equipment



Digital Scale and DRO Systems



Small Tool Instruments and Data Management



Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

My.Mitutoyo

Mitutoyo End User Portal

Search for products, request a product quote, take online metrology courses, and much more. My.Mitutoyo.com puts everything Mitutoyo directly in front of you.



Find additional product literature and our product catalog

www.mitutoyo.com

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive. Specifications are subject to change without notice.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of our products may require prior approval by an appropriate governing authority.

Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

Mitutoyo

Mitutoyo America Corporation

www.mitutoyo.com

One Number to Serve You Better

1-888-MITUTOYO (1-888-648-8869)

M³ Solution Centers:

Aurora, Illinois (Headquarters)

Boston, Massachusetts

Charlotte, North Carolina

Cincinnati, Ohio

Detroit, Michigan

Los Angeles, California

Seattle, Washington

Houston, Texas