




Audibel | Technical Data

mRIC R

micro Receiver-In-Canal
Rechargeable

Fitting Range



- L
- M
- P

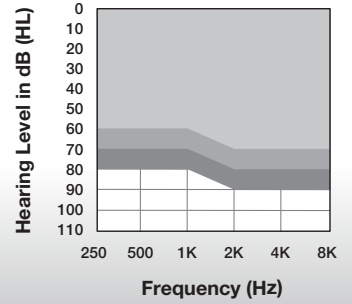

Intrigue AI 24 | 20 | 16 | 12

Color Guide

Standard Colors



Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity
- Rechargeable Battery

Intrigue AI Technology

- Personal health monitoring technology with embedded sensors and artificial intelligence
- Compatible with StarLink accessories

	L	M	P	Matrices: L, M, P Battery: Lithium-ion	
Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler		
Peak OSPL90 (dB SPL)	107	117	119		
HFA OSPL90 (dB SPL)	101	113	115		
Peak Gain (dB)	42	50	60		
HFA Full-On Gain (dB)	35	47	55		
Frequency Range (Hz)	<100-9400	<100-9500	<100-9200		
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5		
Reference Test Gain (dB)	24	36	38		
Equivalent Input Noise (dB)	26	26	26		
Harmonic Distortion					
500 Hz (%)	<3	<3	<3		
800 Hz (%)	<3	<3	<3		
1600 Hz (%)	<3	<3	<3		
Estimated Lithium-ion Battery Life*					
Without streaming (hrs)	Up to 41	Up to 41	Up to 41		
With streaming (hrs)	Up to 33	Up to 33	Up to 33		
Battery Current (mA)	0.5	0.5	0.6		
Tinnitus Therapy Stimulus					
Max RMS Output (dB SPL)	87	87	87		
Weighted RMS Output Level (dB SPL)	87	87	87		
Max 1/3 Octave Output (dB SPL)	87	87	87		

*Results will vary based on wireless usage.

Audibel, Intrigue, and Starlink are trademarks of Starkey Laboratories, Inc.

©2023 Starkey Laboratories, Inc. All Rights Reserved. 6/23 SPEC3051-04-EN-AB




Audibel | Technical Data

mRIC R CUSTOM CASED

micro Receiver-In-Canal
Rechargeable

Fitting Range

- L
- M
- P
- UP

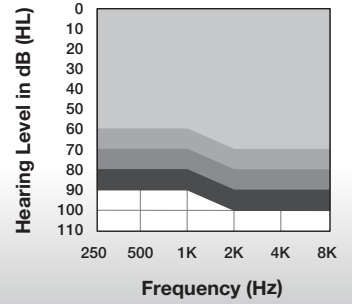

Intrigue AI 24 | 20 | 16 | 12

Color Guide

Standard Colors



Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity
- Rechargeable Battery

Intrigue AI Technology

- Personal health monitoring technology with embedded sensors and artificial intelligence
- Compatible with StarLink accessories

	L	M	P	UP	Matrices: L, M, P, UP Battery: Lithium-ion	
Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler		
Peak OSPL90 (dB SPL)	107	117	119	125		
HFA OSPL90 (dB SPL)	101	113	115	122		
Peak Gain (dB)	42	50	60	66		
HFA Full-On Gain (dB)	35	47	55	63		
Frequency Range (Hz)	<100-9400	<100-9500	<100-9200	<100-5800		
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5		
Reference Test Gain (dB)	24	36	38	45		
Equivalent Input Noise (dB)	26	26	26	26		
Harmonic Distortion						
500 Hz (%)	<3	<3	<3	<3		
800 Hz (%)	<3	<3	<3	<3		
1600 Hz (%)	<3	<3	<3	<3		
Estimated Lithium-ion Battery Life*						
Without streaming (hrs)	Up to 41	Up to 41	Up to 41	Up to 41		
With streaming (hrs)	Up to 33	Up to 33	Up to 33	Up to 33		
Battery Current (mA)	0.5	0.5	0.6	0.6		
Tinnitus Therapy Stimulus						
Max RMS Output (dB SPL)	87	87	87	87		
Weighted RMS Output Level (dB SPL)	87	87	87	87		
Max 1/3 Octave Output (dB SPL)	87	87	87	87		

*Results will vary based on wireless usage.

Audibel, Intrigue, and Starlink are trademarks of Starkey Laboratories, Inc.

©2023 Starkey Laboratories, Inc. All Rights Reserved. 6/23 SPEC3051-04-EN-AB










Audibel | Technical Data
mRIC R
 micro Receiver-In-Canal
 Rechargeable



Audibel | Technical Data
mRIC R CUSTOM CASED
 micro Receiver-In-Canal
 Rechargeable

Intrigue AI 24 | 20 | 16 | 12

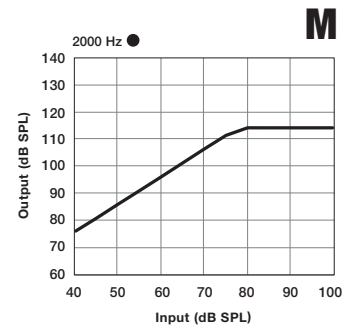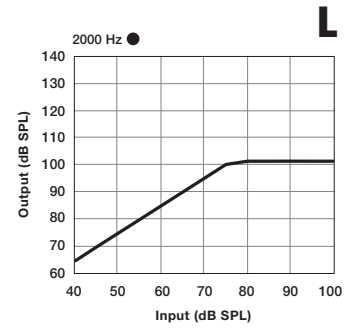

Latency (ms)	4.3
Attack Time (ms)	1
Release Time (ms)	160