




# Starkey | Technical Data

## IIC NW

Invisible-In-Canal

### Fitting Range


- L-
- L
- M

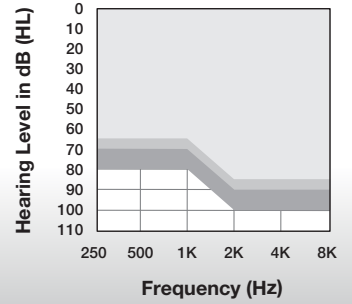

## Signature Series

### Color Guide

#### Faceplate Colors



#### Shell Colors






### Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wired Programming

	L-	L	M	Matrices: L-, L, M Battery Size: 10
--	----	---	---	--

Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler
Peak OSPL90 (dB SPL)	110	110	115
HFA OSPL90 (dB SPL)	104	105	110
Peak Gain (dB)	36	41	49
HFA Full-On Gain (dB)	30	36	46
<b>Frequency Range (Hz)</b>	<100-9400	<100-9400	<100-8660
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5
Reference Test Gain (dB)	27	28	33
Equivalent Input Noise (dB) <sup>1</sup>	25	25	25
Equivalent Input Noise (dB) <sup>2</sup>	14	14	14
<b>Harmonic Distortion</b>			
500 Hz (%)	<3	<3	<3
800 Hz (%)	<3	<3	<3
1600 Hz (%)	<3	<3	<3
<b>Estimated Battery Life for 16-Hour Day</b>			
10 Zinc Air (days)	Up to 7	Up to 7	Up to 7
Battery Current (mA)	1.1	1.1	1.2
<b>Tinnitus Therapy Stimulus</b>			
Max RMS Output (dB SPL)	87	87	87
Weighted RMS Output Level (dB SPL)	87	87	87
Max 1/3 Octave Output (dB SPL)	87	87	87

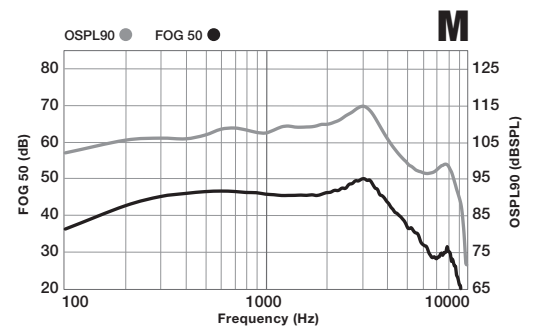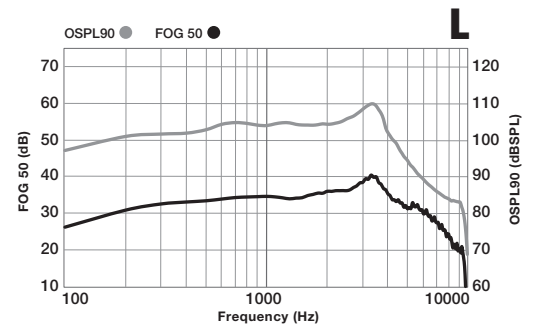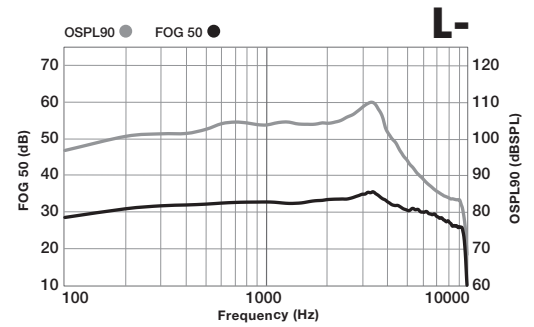

<sup>1</sup> With expansion off

<sup>2</sup> With expansion on






# Starkey | Technical Data

## IIC NW

Invisible-In-Canal

### Signature Series



Latency (ms) 4.3

Attack Time (ms) 3

Release Time (ms) 60




# Starkey | Technical Data

## IIC NW

Invisible-In-Canal

### Fitting Range

- P
- UP-
- UP

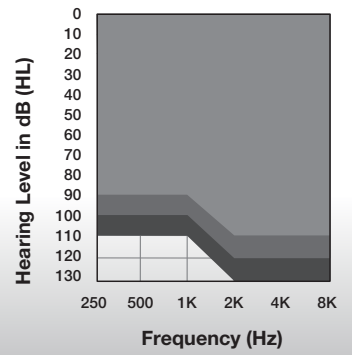

## Signature Series

### Color Guide

#### Faceplate Colors



#### Shell Colors






### Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wired Programming

	P	UP-	UP	Matrices: P, UP-, UP Battery Size: 10
--	---	-----	----	--

Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler
Peak OSPL90 (dB SPL)	118	122	130
HFA OSPL90 (dB SPL)	110	117	123
Peak Gain (dB)	60	64	70
HFA Full-On Gain (dB)	52	58	63
<b>Frequency Range (Hz)</b>	<100-7630	<100-7000	<100-5930
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5
Reference Test Gain (dB)	33	40	46
Equivalent Input Noise (dB) <sup>1</sup>	25	25	25
Equivalent Input Noise (dB) <sup>2</sup>	14	14	14
<b>Harmonic Distortion</b>			
500 Hz (%)	<3	<3	<3
800 Hz (%)	<3	<3	<3
1600 Hz (%)	<3	<3	<3
<b>Estimated Battery Life for 16-Hour Day</b>			
10 Zinc Air (days)	Up to 7	Up to 7	Up to 7
Battery Current (mA)	1.2	1.3	1.3
<b>Tinnitus Therapy Stimulus</b>			
Max RMS Output (dB SPL)	87	92	92
Weighted RMS Output Level (dB SPL)	87	92	92
Max 1/3 Octave Output (dB SPL)	87	92	92

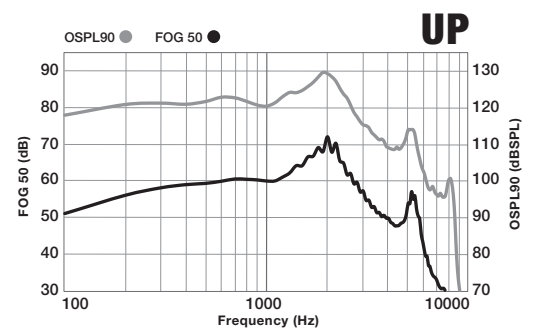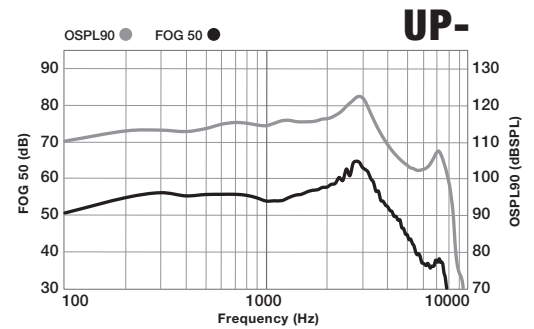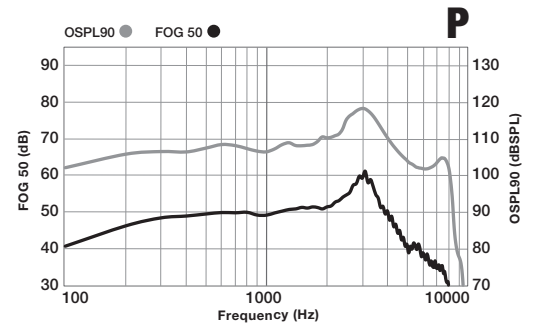

<sup>1</sup> With expansion off

<sup>2</sup> With expansion on






# Starkey | Technical Data

## IIC NW

Invisible-In-Canal

### Signature Series



Latency (ms) 4.3

Attack Time (ms) 3

Release Time (ms) 60