




Starkey | Technical Data

CIC R NW

Completely-In-Canal
Rechargeable

Fitting Range

- L
- M
- P
- UP

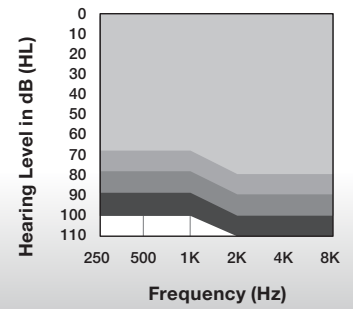

Omega AI+ 24 | 20 | 16

Color Guide

Faceplate Colors



Shell Colors



Patient Features

- IP Rating: 68
- Tinnitus Technology
- Rechargeable Battery

	L	M	P	UP	Matrices: L, M, P, UP Battery: Lithium-ion
Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	
Peak OSPL90 (dB SPL)	110	114	117	125	
HFA OSPL90 (dB SPL)	105	110	113	122	
Peak Gain (dB)	40	49	59	67	
HFA Full-On Gain (dB)	36	47	53	62	
Frequency Range (Hz)	<100-9400	<100-8500	<100-6600	<100-5500	
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	
Reference Test Gain (dB)	28	33	36	45	
Equivalent Input Noise (dB SPL) <i>Expansion On (Default)</i>	25	25	25	25	
Equivalent Input Noise (dB SPL) <i>Expansion Off</i>	14	14	14	14	
Harmonic Distortion					
500 Hz (%)	<3	<3	<3	<3	
800 Hz (%)	<3	<3	<3	<3	
1600 Hz (%)	<3	<3	<3	<3	
Estimated Battery Life					
Lithium-ion battery (hrs)	Up to 38	Up to 38	Up to 38	Up to 38	
Battery Current (mA)	0.9	0.9	0.9	0.9	







Starkey | Technical Data

CIC R NW

Completely-In-Canal
Rechargeable

Omega AI+ 24 | 20 | 16



Latency (ms)	4.3
Attack Time (ms)	3
Release Time (ms)	60