




Fitting Range

- L-
- L
- M

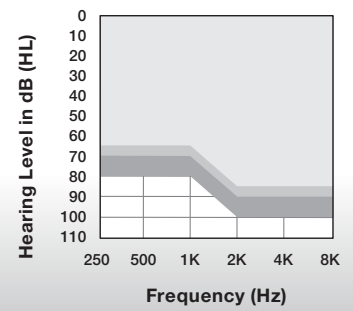

Omega AI+ 24

Color Guide

Faceplate Colors






Shell Colors



Patient Features

- IP Rating: 68
- Tinnitus Technology

	L-	L	M	Matrices: L-, L, M Battery Size: 10
Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	
Peak OSPL90 (dB SPL)	110	110	115	
HFA OSPL90 (dB SPL)	104	105	110	
Peak Gain (dB)	36	41	49	
HFA Full-On Gain (dB)	30	36	46	
Frequency Range (Hz)	<100-9400	<100-9400	<100-8660	
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	
Reference Test Gain (dB)	27	28	33	
Equivalent Input Noise (dB SPL) Expansion Off	25	25	25	
Equivalent Input Noise (dB SPL) Expansion On (Default)	14	14	14	
Harmonic Distortion				
500 Hz (%)	<3	<3	<3	
800 Hz (%)	<3	<3	<3	
1600 Hz (%)	<3	<3	<3	
Estimated Battery Life for 16-Hour Day				
10 Zinc Air (days)	Up to 7	Up to 7	Up to 7	
Battery Current (mA)	1.1	1.1	1.2	

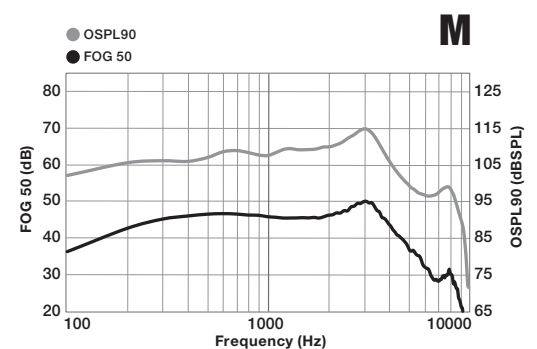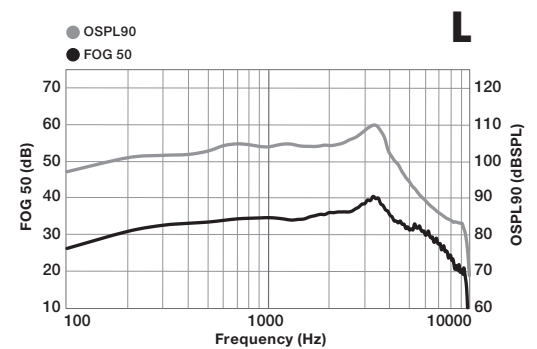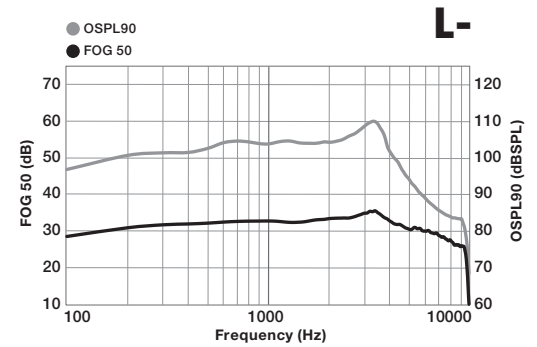






Starkey | Technical Data

IIC NW

Invisible-In-Canal

Omega AI+ 24



Latency (ms)	4.3
Attack Time (ms)	3
Release Time (ms)	60