


SoundGear Amp 2

ITC R

In-The-Canal Rechargeable

Fitting Range

- L
- M
- P



Technical Data

Color Guide

Faceplate Colors

Chestnut Beige Black

Shell Colors


Clear Beige Black

Patient Features


- IP Rating: 68
- Wireless Connectivity
- Rechargeable Battery
- Compatible with SoundGear Accessories

	L	M	P	Matrices: L, M, P Battery: Lithium-ion
Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	
Peak OSPL90 (dB SPL)	110	114	117	
HFA OSPL90 (dB SPL)	105	109	113	
Peak Gain (dB)	40	50	59	
HFA Full-On Gain (dB)	36	46	55	
Frequency Range (Hz)	<100-9600	<100-8400	<100-6600	
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	
Reference Test Gain (dB)	28	32	36	
Equivalent Input Noise (dB SPL) *Expansion On (Default)*	15	15	15	
Equivalent Input Noise (dB SPL) *Expansion Off*	25	25	25	
Harmonic Distortion				
500 Hz (%)	<3	<3	<3	
800 Hz (%)	<3	<3	<3	
1600 Hz (%)	<3	<3	<3	
Estimated Lithium-ion Battery Life*				
Without streaming (hrs)	Up to 42	Up to 42	Up to 42	
With streaming (hrs)	Up to 36	Up to 36	Up to 36	
Battery Current (mA)	0.9	0.9	0.9	


L

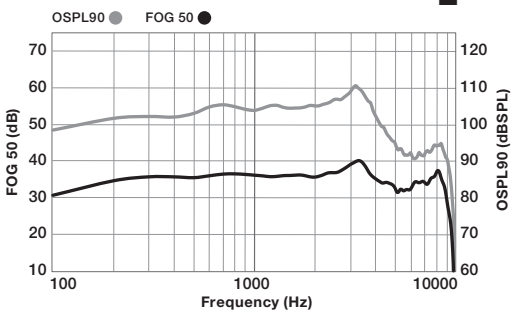

M

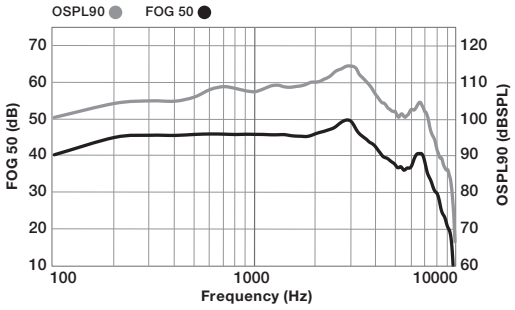

P

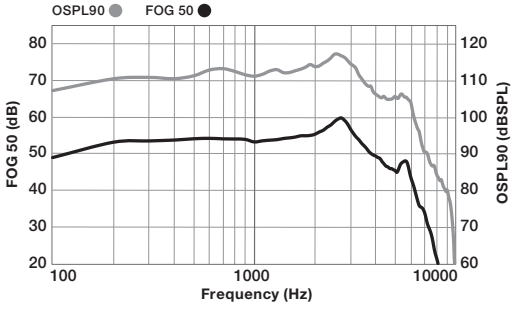

***Results will vary based on wireless usage.**

SoundGear is a registered trademark of Starkey Laboratories, Inc. SoundGear Amp is a trademark of Starkey Laboratories, Inc.
©2026 Starkey Laboratories, Inc. All Rights Reserved. 4/26 SPEC3141-00-EN-SG




SoundGear Amp 2

ITC R


In-The-Canal Rechargeable

Technical Data


L



M



P



Latency (ms)	4.3
Attack Time (ms)	3
Release Time (ms)	60

SoundGear is a registered trademark of Starkey Laboratories, Inc. SoundGear Amp is a trademark of Starkey Laboratories, Inc.
©2026 Starkey Laboratories, Inc. All Rights Reserved. 4/26 SPEC3141-00-EN-SG



SoundGear Amp 2

ITC R

In-The-Canal Rechargeable

Wireless Technical Description

Radio Technology

Bluetooth Low Energy	
Frequency:	2.4 – 2.4835 GHz
Output Power:	-1.7 dBm
Modulation:	GFSK
Receiver Bandwidth:	1.5 mHz

Regulatory Approvals

FCC ID (USA)	
FCC ID Left: EOA-24EDGITELCH	FCC ID Right: EOA-24EDGITERCH

ISED Canada ID	
Left IC: 6903A- 24EDGITELCH	Right IC: 6903A- 24EDGITERCH

Tested to and passed the following emissions and immunity tests

- IEC 60601-1-2 radiated emissions requirements for a Group 1 Class B device as stated in CISPR 11
- RF radiated immunity at a field level of 10 V/m between 80 MHz and 2.7 GHz
- RF radiated immunity to higher field levels from communications devices as stated in Table 9 of IEC 60601-1-2
- Immunity to power frequency magnetic fields at a field level of 30 A/m
- Immunity to proximity magnetic fields as defined in Table 11 of 60601-1-2.
- Immunity to ESD levels of +/- 8 kV conducted discharge and +/- 15 kV air discharge

General Information

These devices comply with part 15 of the FCC rules and with ISED Canada license-exempt RSS standards. Operation is subject to the following two conditions: (1) The device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

Hereby, Starkey Laboratories, Inc. declares that the ITC R is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. A copy of the Declaration of Conformity can be obtained from the address below or from docs.starkeyhearingtechnologies.com.

Hereby, Starkey Laboratories, Inc. declares that the ITC R is in compliance with the UK Radio Equipment Regulations SI 2017 as amended. A copy of the UK Declaration of Conformity can be obtained from the following addresses and from docs.starkeyhearingtechnologies.com.

SoundGear is a registered trademark of Starkey Laboratories, Inc. SoundGear Amp is a trademark of Starkey Laboratories, Inc.
©2026 Starkey Laboratories, Inc. All Rights Reserved. 4/26 SPEC3141-00-EN-SG