




Starkey | Technical Data

CIC NW

Completely-In-Canal

Fitting Range

- L
- M
- P

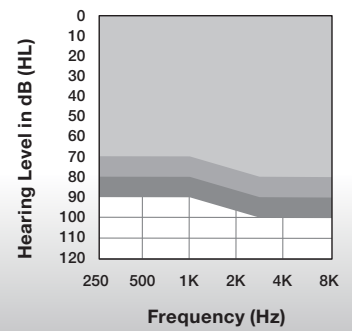

G Series AI 12 | 10

Color Guide

Faceplate Colors



Shell Colors






Patient Features

- IP Rating: 68
- Tinnitus Technology

	L	M	P	Matrices: L, M, P Battery Size: 10, 312
--	---	---	---	--

Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler
Peak OSPL90 (dB SPL)	110	114	118
HFA OSPL90 (dB SPL)	105	110	114
Peak Gain (dB)	43	52	61
HFA Full-On Gain (dB)	37	48	54
Frequency Range (Hz)	<100-7800	<100-7700	<100-6600
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5
Reference Test Gain (dB)	28	33	37
Equivalent Input Noise (dB SPL) <i>Expansion On (Default)</i>	17	17	17
Equivalent Input Noise (dB SPL) <i>Expansion Off</i>	25	25	25
Harmonic Distortion			
500 Hz (%)	<3	<3	<3
800 Hz (%)	<3	<3	<3
1600 Hz (%)	<3	<3	<3
Estimated Battery Life for 16-Hour Day			
10 Zinc Air (days)	5-7	5-7	5-7
312 Zinc Air (days)	8-10	8-10	8-10
Battery Current (mA)	1.1	1.2	1.2

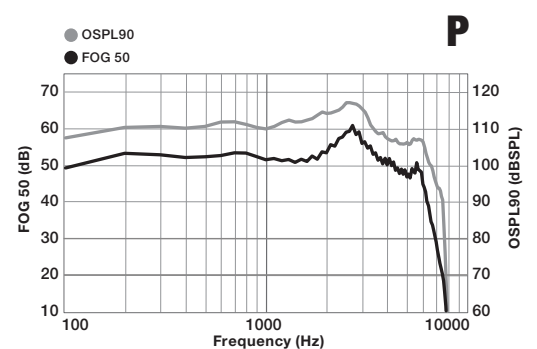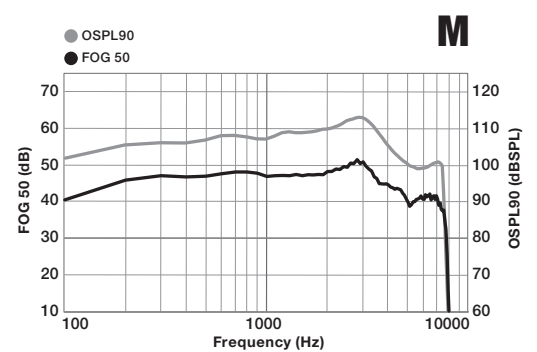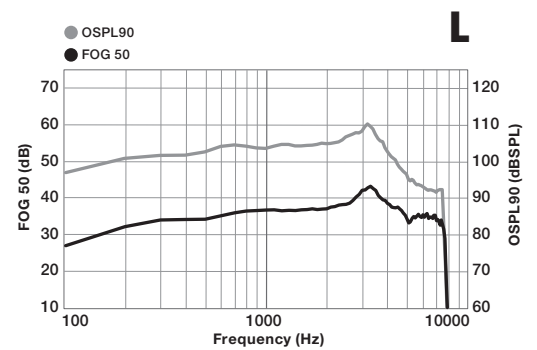






Starkey | Technical Data

CIC NW

Completely-In-Canal

G Series AI 12 | 10



Latency (ms)	4.3
Attack Time (ms)	3
Release Time (ms)	60