



Edge AI

Key Features

- Bluetooth Low Energy Audio with Auracast technology
- StarLink Edge TV Streamer & StarLink Remote Control 2.0 Compatibility
- Apple Watch Controls
- Balance Assessment within My Starkey App
- Demo Stream
- Tinnitus maskers (blue/red/pink/purple/ocean)
- Zinc Air Battery
- 24 Channels
- 4 Programs*
- Additive Compressor
- Feedback Canceller
- Data Log
- Voice AI
- Translate
- Multiflex Tinnitus Pro
- Transcribe
- Edge Mode+
- Smart Assistant
- 2- Way Audio & Find My Phone
- Hearing Health & Activity Tracking
- Fall Alert
- Reminders & Self-Check
- Auto Sleep
- Tap Control
- TeleHear full remote fit & REM Target Match
- My Starkey & Hear Share App Compatibility
- NOAH Link Wireless Programming

Sound Manager:

- Quiet
- Machine Noise Reduction
- Speech in Noise Reduction
- Transient Noise Reduction
- Wind Reduction

Ear-to-Ear Technology:

- Binaural Wind
- Binaural Machine

*Programs accessible via hearing aid user control or wireless accessory

Apple Watch® is a trademark of Apple, Inc., registered in the U.S. and other countries and regions. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The Auracast™ word mark and logos are trademarks owned by the Bluetooth SIG. Any use of such marks by Starkey is under license. Starkey, TeleHear, Hear Share, Multiflex Tinnitus, Edge Mode, and StarLink are registered trademarks of Starkey Laboratories, Inc. Starkey Edge is a trademark of Starkey Laboratories, Inc.

©2024 Starkey Laboratories, Inc. All Rights Reserved. 8/24 SPEC3082-00-EN-GS




Starkey | Technical Data

CIC

Completely-In-Canal

Fitting Range

- L
- M
- P
- UP

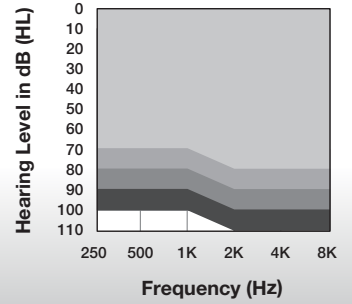

Edge AI

Color Guide

Faceplate Colors



Shell Colors



Patient Features





- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity

Edge AI Technology

- Personal health monitoring technology with embedded sensors and artificial intelligence
- Compatible with StarLink Remote Control 2.0 and StarLink Edge accessories

	L	M	P	UP	Matrices: L, M, P, UP Battery Size: 312
--	---	---	---	----	--

Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler
Peak OSPL90 (dB SPL)	109	113	117	125
HFA OSPL90 (dB SPL)	104	109	113	121
Peak Gain (dB)	42	51	60	67
HFA Full-On Gain (dB)	36	47	54	63
Frequency Range (Hz)	<100-9400	<100-8500	<100-6600	<100-5800
HFA Frequencies (kHz)	1.0, 1.6, 2.5	1.0, 1.6, 2.5	1.0, 1.6, 2.5	1.0, 1.6, 2.5
Reference Test Gain (dB)	27	32	36	44
Equivalent Input Noise (dB SPL) <i>Expansion On (Default)</i>	15	15	15	15
Equivalent Input Noise (dB SPL) <i>Expansion Off</i>	25	25	25	25
Harmonic Distortion				
500 Hz (%)	<3	<3	<3	<3
800 Hz (%)	<3	<3	<3	<3
1600 Hz (%)	<3	<3	<3	<3

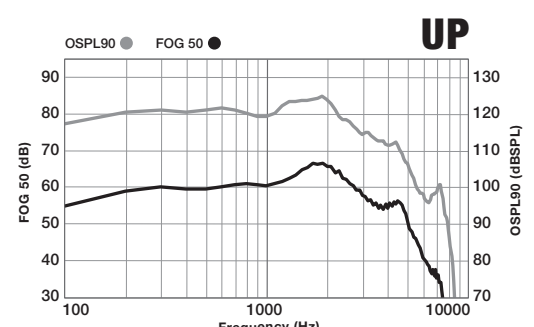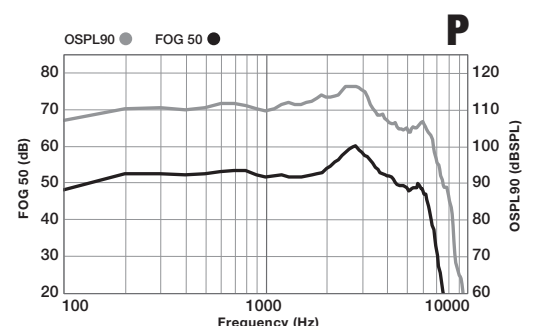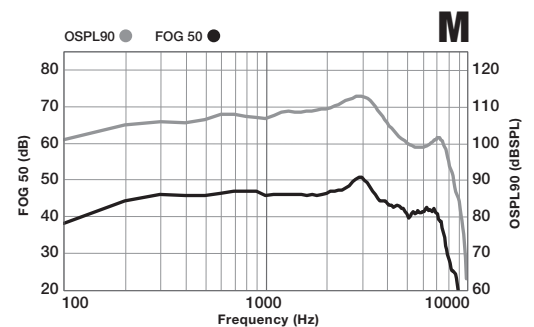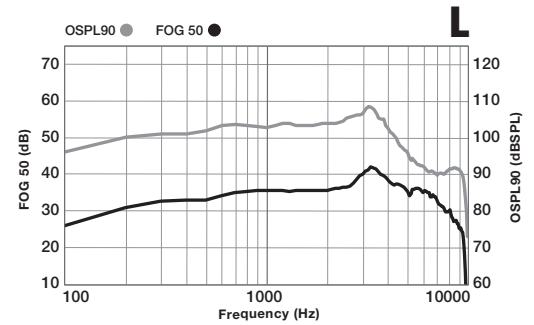

Estimated Battery Life for 16-Hour Day

	L	M	P	UP
Without Streaming (days)	Up to 8	Up to 8	Up to 8	Up to 8
With Streaming (days)	Up to 7	Up to 7	Up to 7	Up to 7
Battery Current (mA)	1.3	1.3	1.3	1.4

Tinnitus Therapy Stimulus

	L	M	P	UP
Max RMS Output (dB SPL)	87	87	87	87
Weighted RMS Output Level (dB SPL)	87	87	87	87
Max 1/3 Octave Output (dB SPL)	87	87	87	87







Starkey | Technical Data

CIC

Completely-In-Canal

Edge AI



Latency (ms) 4.3

Attack Time (ms) 3

Release Time (ms) 60