


# Choosing the right receiver

**When choosing the right receiver matrix for a hearing loss, there are a variety of factors to consider.** As a starting point, the hearing threshold at 2000 Hz is pivotal for receiver gain selection for speech clarity. Additional considerations such as MCL, UCL, and ear canal size also can determine the most comfortable solution for your patient.



## 2000 Hz

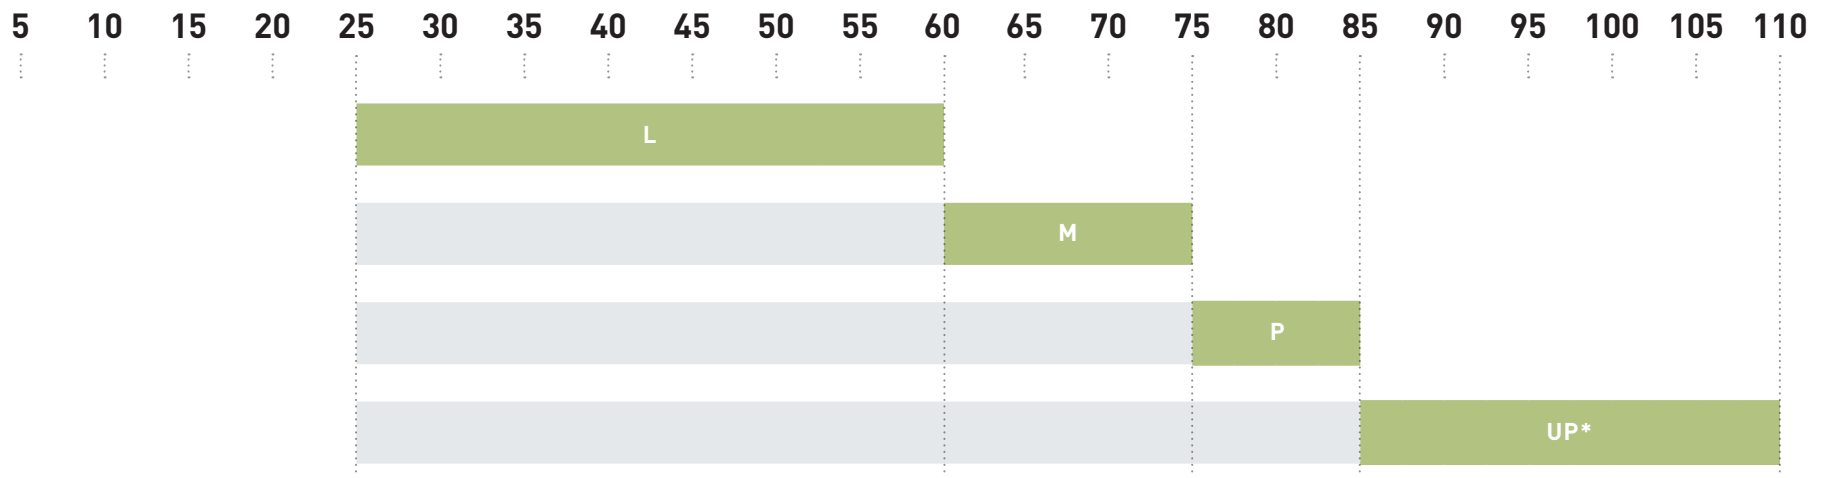

Denotes manufacturer's recommendation

# Choosing the right vent



As the global leader in custom hearing technology, the Manufacturer Select option we provide will be based on the information you give in your custom order plus information gleaned from the millions of data points we have collected through our storied history.

## **At Audibel, we understand that you know your patients best.**

If you would prefer to select the venting option for a custom product or earmold, please refer to this guide using the hearing threshold at 750 Hz to choose the optimal vent selection.



**Vent**  
750 Hz

