




Starkey | Technical Data

CIC

Completely-In-Canal

Fitting Range

- L
- M
- P

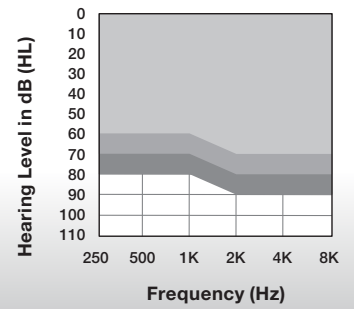

G Series AI 12 | 10

Color Guide

Faceplate Colors



Shell Colors






Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity
- Compatible with StarLink accessories

	L	M	P	Matrices: L, M, P Battery Size: 312
--	---	---	---	--

Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler
Peak OSPL90 (dB SPL)	109	113	117
HFA OSPL90 (dB SPL)	104	109	113
Peak Gain (dB)	42	51	60
HFA Full-On Gain (dB)	36	47	54
Frequency Range (Hz)	<100-7800	<100-7700	<100-6900
HFA Frequencies (kHz)	1.0, 1.6, 2.5	1.0, 1.6, 2.5	1.0, 1.6, 2.5
Reference Test Gain (dB)	27	32	36
Equivalent Input Noise (dB SPL) <i>Expansion On (Default)</i>	17	17	17
Equivalent Input Noise (dB SPL) <i>Expansion Off</i>	25	25	25
Harmonic Distortion			
500 Hz (%)	<3	<3	<3
800 Hz (%)	<3	<3	<3
1600 Hz (%)	<3	<3	<3
Estimated Battery Life for 16-Hour Day			
Without Streaming (days)	Up to 8	Up to 8	Up to 8
With Streaming (days)	Up to 7	Up to 7	Up to 7
Battery Current (mA)	1.3	1.3	1.3

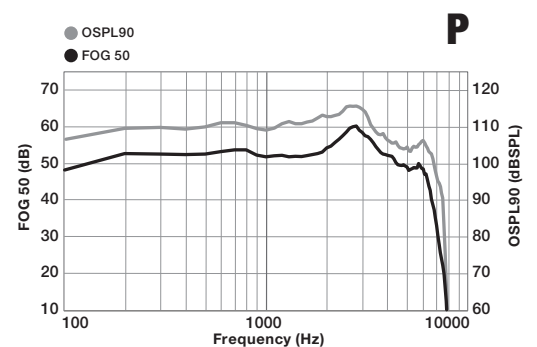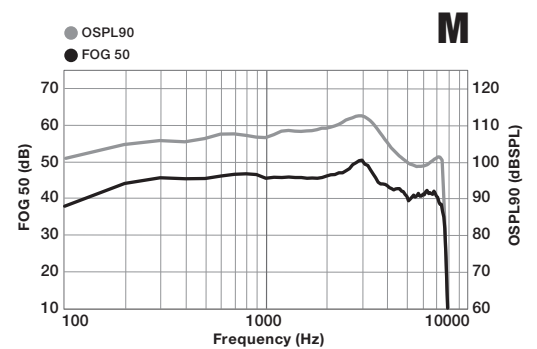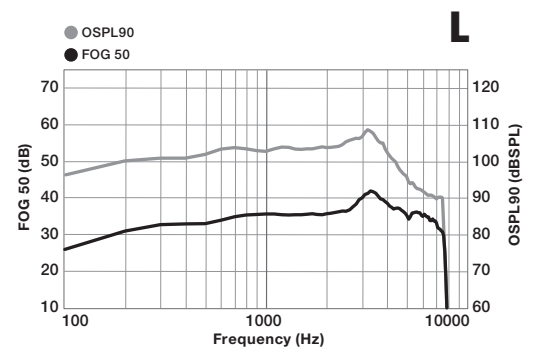






Starkey | Technical Data

CIC

Completely-In-Canal

G Series AI 12 | 10



Latency (ms)	4.3
Attack Time (ms)	3
Release Time (ms)	60