




Starkey | Technical Data

RIC R

Receiver-In-Canal Rechargeable

Fitting Range

- RIC R 40
- RIC R 50
- RIC R 60



Evolv AI 2400 | 2000 | 1600

Color Guide

Standard Colors



2.4 GHz Accessory Compatibility

- TV streamer
- Remote Microphone +
- Remote
- Mini Remote Microphone
- Table Microphone
- Programmer




Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity
- Telecoil
- CROS System
- Rechargeable

Evolv AI Technology

- Healthable hearing technology with embedded sensors and artificial intelligence

	40 Gain Data		50 Gain Data		60 Gain Data		Matrices: 107/40, 115/50, 120/60 Battery Size: Encased 312	
Measurement	ANSI/IEC 2cc Coupler	IEC OES Coupler	ANSI/IEC 2cc Coupler	IEC OES Coupler	ANSI/IEC 2cc Coupler	IEC OES Coupler		
Peak OSPL90 (dB SPL)	107	120	115	127	120	131	Matrix 107/40	
HFA OSPL90 (dB SPL)	102	N/A	109	N/A	117	N/A	Matrix 115/50	
RTF OSPL90 (dB SPL)	N/A	112	N/A	119	N/A	127	Matrix 120/60	
Peak Gain (dB)	40	52	50	63	60	71		
HFA Full-On Gain (dB)	35	N/A	45	N/A	56	N/A		
RTF Full-On Gain (dB)	N/A	43	N/A	55	N/A	65		
Frequency Range (Hz)	<100-9400	<100-9400	<100-9600	<100-9600	<100-9200	<100-9600		
Reference Test Freq. (kHz)	N/A	1.6	N/A	1.6	N/A	1.6		
HFA Frequencies (kHz)	1.0,1.6,2.5	N/A	1.0,1.6,2.5	N/A	1.0,1.6,2.5	N/A		
Reference Test Gain (dB)	25	36	32	44	40	52		
Equivalent Input Noise (dB)	26	26	26	26	26	26		
Harmonic Distortion								
500 Hz (%)	<3	<3	<3	<3	<3	<3		
800 Hz (%)	<3	<3	<3	<3	<3	<3		
1600 Hz (%)	<3	<3	<3	<3	<3	<3		
Induction Coil Sensitivity								
HFA SPLITS (ANSI) (dB SPL)	83	N/A	89	N/A	97	N/A		
MASL (IEC) (dB SPL)	64	N/A	75	N/A	84	N/A		
Estimated Lithium ION Battery Life								
Li-Ion Rechargeable Battery (hrs)	Up to 24 hours*		Up to 24 hours*		Up to 24 hours*			
Tinnitus Therapy Stimulus								
Max RMS Output (dB SPL)	87		87		87			
Weighted RMS Output Level (dB SPL)	87		87		87			
Max 1/3 Octave Output (dB SPL)	87		87		87			

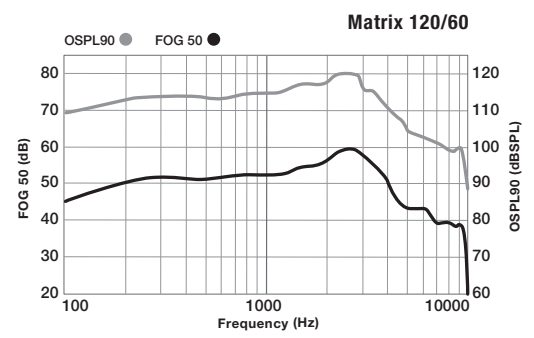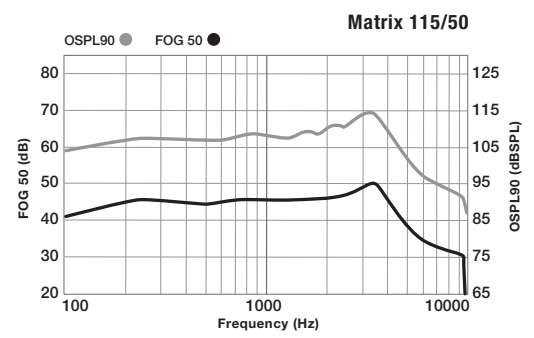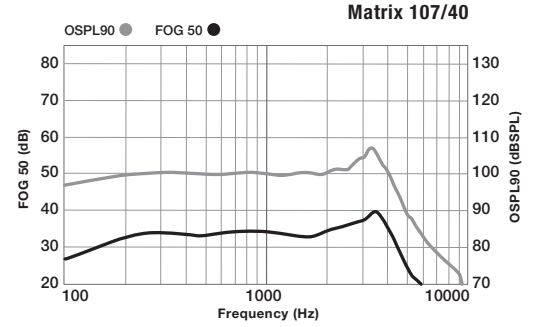

*Results will vary based on wireless usage.




Starkey | Technical Data

RIC R

Receiver-In-Canal Rechargeable

Fitting Range

- RIC R 40
- RIC R 50
- RIC R 60



Evolv AI 1200

Color Guide

Standard Colors



2.4 GHz Accessory Compatibility

- TV streamer
- Remote Microphone +
- Remote
- Mini Remote Microphone
- Table Microphone
- Programmer




Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity
- Telecoil
- CROS System
- Rechargeable

Evolv AI Technology

- Healthable hearing technology with embedded sensors and artificial intelligence

	40 Gain Data		50 Gain Data		60 Gain Data		Matrices: 107/40, 115/50, 120/60 Battery Size: Encased 312	
Measurement	ANSI/IEC 2cc Coupler	IEC OES Coupler	ANSI/IEC 2cc Coupler	IEC OES Coupler	ANSI/IEC 2cc Coupler	IEC OES Coupler		
Peak OSPL90 (dB SPL)	107	120	115	127	120	131	Matrix 107/40	
HFA OSPL90 (dB SPL)	102	N/A	109	N/A	117	N/A	Matrix 115/50	
RTF OSPL90 (dB SPL)	N/A	112	N/A	119	N/A	127	Matrix 120/60	
Peak Gain (dB)	40	52	50	63	60	71		
HFA Full-On Gain (dB)	35	N/A	45	N/A	56	N/A		
RTF Full-On Gain (dB)	N/A	43	N/A	55	N/A	65		
Frequency Range (Hz)	<100-7700	<100-7700	<100-7700	<100-7800	<100-7700	<100-7800		
Reference Test Freq. (kHz)	N/A	1.6	N/A	1.6	N/A	1.6		
HFA Frequencies (kHz)	1.0,1.6,2.5	N/A	1.0,1.6,2.5	N/A	1.0,1.6,2.5	N/A		
Reference Test Gain (dB)	25	36	32	44	40	52		
Equivalent Input Noise (dB)	26	26	26	26	26	26		
Harmonic Distortion								
500 Hz (%)	<3	<3	<3	<3	<3	<3		
800 Hz (%)	<3	<3	<3	<3	<3	<3		
1600 Hz (%)	<3	<3	<3	<3	<3	<3		
Induction Coil Sensitivity								
HFA SPLITS (ANSI) (dB SPL)	83	N/A	89	N/A	97	N/A		
MASL (IEC) (dB SPL)	64	N/A	75	N/A	84	N/A		
Estimated Lithium ION Battery Life								
Li-Ion Rechargeable Battery (hrs)	Up to 24 hours*		Up to 24 hours*		Up to 24 hours*			
Tinnitus Therapy Stimulus								
Max RMS Output (dB SPL)	87		87		87			
Weighted RMS Output Level (dB SPL)	87		87		87			
Max 1/3 Octave Output (dB SPL)	87		87		87			

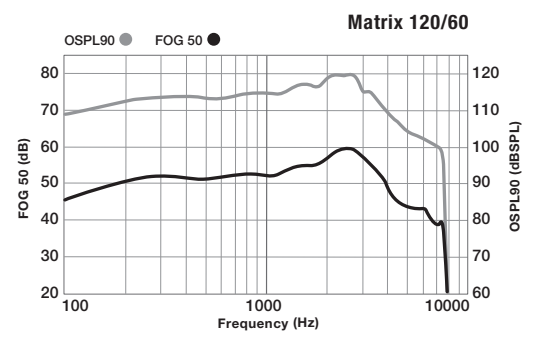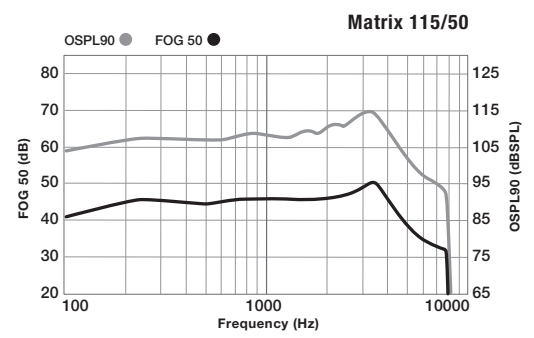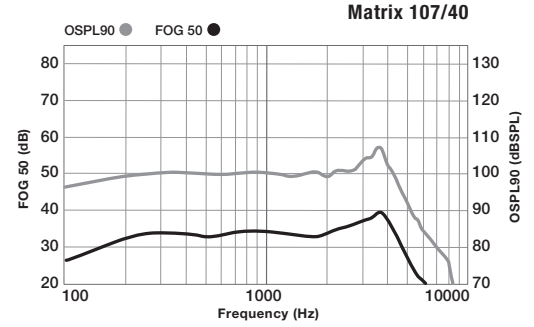

*Results will vary based on wireless and feature usage.




Starkey | Technical Data

RIC R AP

Receiver-In-Canal Rechargeable **ABSOLUTE POWER**

Fitting Range

- RIC R AP 60
- RIC R AP 70



Evolv AI 2400 | 2000 | 1600

Color Guide

Standard Colors



2.4 GHz Accessory Compatibility

- TV streamer
- Remote Microphone +
- Remote
- Mini Remote Microphone
- Table Microphone
- Programmer

Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity
- Telecoil
- CROS System
- Rechargeable

Evolv AI Technology

- Healthable hearing technology with embedded sensors and artificial intelligence

	60 Gain Data		70 Gain Data		Matrices: 123/60, 130/70 Battery Size: Encased 312	
--	--------------	--	--------------	--	---	--

Measurement	ANSI/IEC 2cc Coupler	IEC OES Coupler	ANSI/IEC 2cc Coupler	IEC OES Coupler
Peak OSPL90 (dB SPL)	123	133	130	140
HFA OSPL90 (dB SPL)	117	N/A	124	N/A
RTF OSPL90 (dB SPL)	N/A	130	N/A	139
Peak Gain (dB)	60	70	70	81
HFA Full-On Gain (dB)	54	N/A	65	N/A
RTF Full-On Gain (dB)	N/A	66	N/A	78



Frequency Range (Hz)	<100-5500	<100-5700	<100-5800	<100-5700
Reference Test Freq. (kHz)	N/A	1.6	N/A	1.6
HFA Frequencies (kHz)	1.0,1.6,2.5	N/A	1.0,1.6,2.5	N/A
Reference Test Gain (dB)	40	55	47	64
Equivalent Input Noise (dB)	26	26	26	26

Harmonic Distortion				
500 Hz (%)	<3	<3	<3	<3
800 Hz (%)	<3	<3	<3	<3
1600 Hz (%)	<3	<3	<3	<3

Induction Coil Sensitivity				
HFA SPLITS (ANSI) (dB SPL)	N/A	N/A	N/A	N/A
MASL (IEC) (dB SPL)	N/A	N/A	N/A	N/A

Estimated Lithium ION Battery Life		
Li-Ion Rechargeable Battery (hrs)	Up to 24 hours*	Up to 24 hours*

Tinnitus Therapy Stimulus		
Max RMS Output (dB SPL)	87	87
Weighted RMS Output Level (dB SPL)	87	87
Max 1/3 Octave Output (dB SPL)	87	87

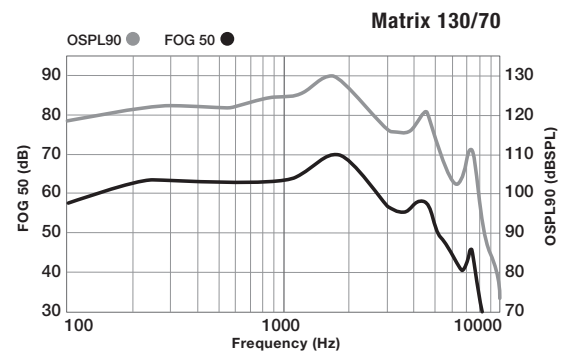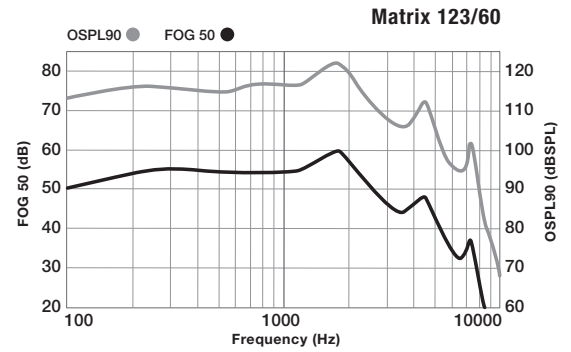

*Results will vary based on wireless usage.




Starkey | Technical Data

RIC R AP

Receiver-In-Canal Rechargeable **ABSOLUTE POWER**

Fitting Range

- RIC R AP 60
- RIC R AP 70



Evolv AI 1200

Color Guide

Standard Colors



2.4 GHz Accessory Compatibility

- TV streamer
- Remote Microphone +
- Remote
- Mini Remote Microphone
- Table Microphone
- Programmer

Patient Features

- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity
- Telecoil
- CROS System
- Rechargeable

Evolv AI Technology

- Healthable hearing technology with embedded sensors and artificial intelligence

	60 Gain Data		70 Gain Data		Matrices: 123/60, 130/70	
					Battery Size: Encased 312	

Measurement	ANSI/IEC 2cc Coupler	IEC OES Coupler	ANSI/IEC 2cc Coupler	IEC OES Coupler
Peak OSPL90 (dB SPL)	123	133	130	140
HFA OSPL90 (dB SPL)	117	N/A	124	N/A
RTF OSPL90 (dB SPL)	N/A	130	N/A	139
Peak Gain (dB)	60	70	70	81
HFA Full-On Gain (dB)	54	N/A	65	N/A
RTF Full-On Gain (dB)	N/A	66	N/A	78



Frequency Range (Hz)	<100-5500	<100-5700	<100-5800	<100-5700
Reference Test Freq. (kHz)	N/A	1.6	N/A	1.6
HFA Frequencies (kHz)	1.0,1.6,2.5	N/A	1.0,1.6,2.5	N/A
Reference Test Gain (dB)	40	55	47	64
Equivalent Input Noise (dB)	26	26	26	26

Harmonic Distortion				
500 Hz (%)	<3	<3	<3	<3
800 Hz (%)	<3	<3	<3	<3
1600 Hz (%)	<3	<3	<3	<3

Induction Coil Sensitivity				
HFA SPLITS (ANSI) (dB SPL)	N/A	N/A	N/A	N/A
MASL (IEC) (dB SPL)	N/A	N/A	N/A	N/A

Estimated Lithium ION Battery Life		
Li-Ion Rechargeable Battery (hrs)	Up to 24 hours*	Up to 24 hours*

Tinnitus Therapy Stimulus		
Max RMS Output (dB SPL)	87	87
Weighted RMS Output Level (dB SPL)	87	87
Max 1/3 Octave Output (dB SPL)	87	87

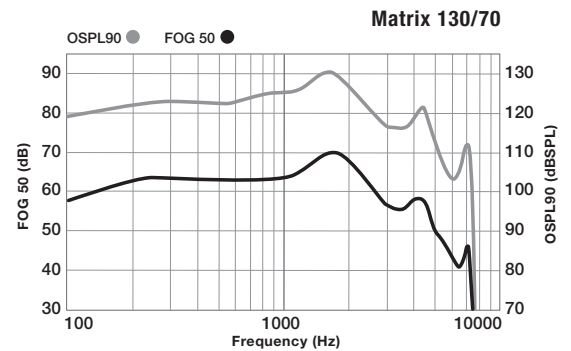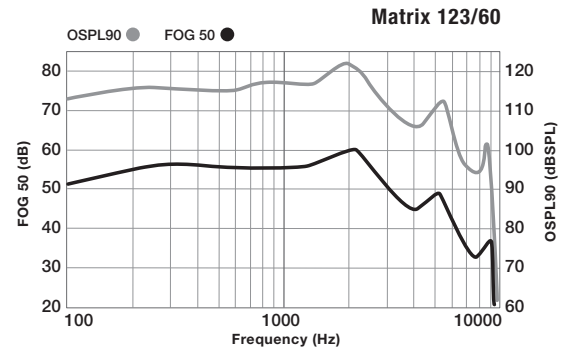

*Results will vary based on wireless and feature usage.