
ARCLIN

Kevlar®

Arclin® Kevlar® 745GR

TECHNICAL DATA SHEET

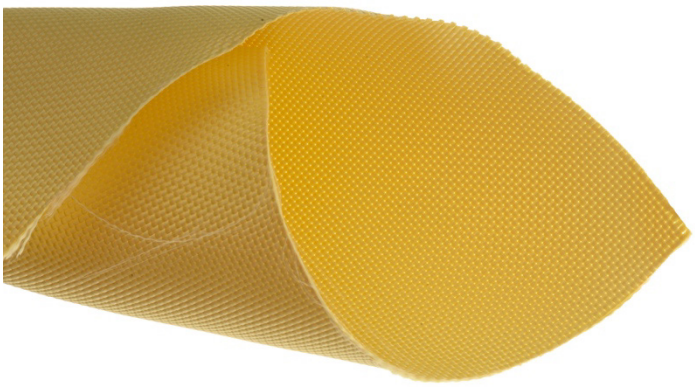

PRODUCT SPECIFICATION

PRODUCT: Kevlar® 745 GREICE

YARN: Kevlar® 29

WEAVE: Plain

DENIER: 3000

MERGE: 1F279/ 1K606/ 1K1523

DATE EFFECTIVE: 19 January, 2018

TECHNICAL DATA

PROPERTY	SPECIFICATIONS			TEST METHOD
	NOMINAL	LOW	HIGH	ASTM Std.
Density (ends per inch)	17	16	18	D 3775
Basis Weight (g/m2)	439	413	465	D 3776
Thickness (mm)	5.58	0.52	0.64	D 1777

Product safety information is available upon request. This information is provided in good faith as technical guidance based on our current product knowledge and may be updated as new information becomes available. It is for experimental purposes only and does not replace independent testing to determine suitability for varied applications. Arclin is unable to anticipate all manufacturing, processing, handling, application or end-use conditions and therefore MAKES NO EXPRESS OR IMPLIED REPRESENTATIONS OR WARRANTIES AND ASSUMES NO LIABILITY IN CONNECTION WITH ANY USE OF THIS INFORMATION. Nothing herein shall be construed as a license or recommendation to infringe any patent or other intellectual property rights.

Arclin®, the Arclin logo, Kevlar®, Nomex®, Firepoint® and all trademarks and service marks denoted with TM, SM or ® are owned by Arclin and its affiliates unless otherwise noted. © 2026 Arclin. All rights reserved.