




Versa-Lam[®] Installed for Damaged AJS[®] / BCI[®] Joist

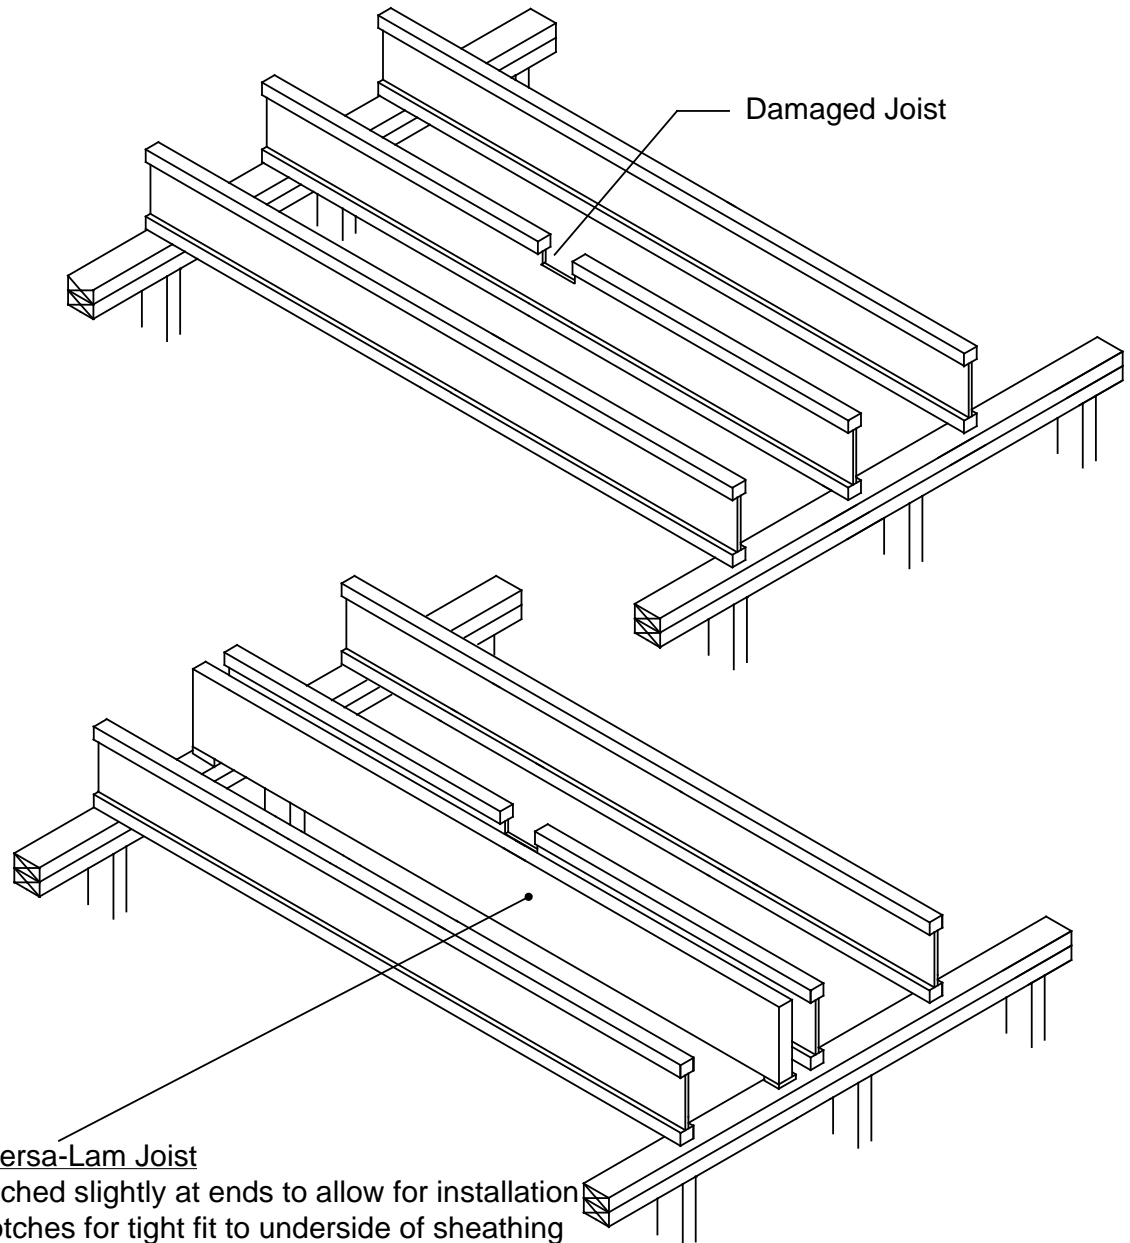

1 ½" or 1 ¾" Versa-Lam Joist

- May be notched slightly at ends to allow for installation
- Shim up notches for tight fit to underside of sheathing
- Install adjacent to existing damaged joist: 4" maximum offset
- Provide blocking between joists at bearings (not shown for clarity)
- Nail floor sheathing to Versa-Lam with floor diaphragm fastening schedule