



TECTUS

Receiver SZ

Reinforcement for steel and stainless steel frames

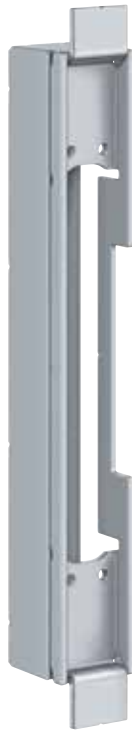

TE 540 3D SZ

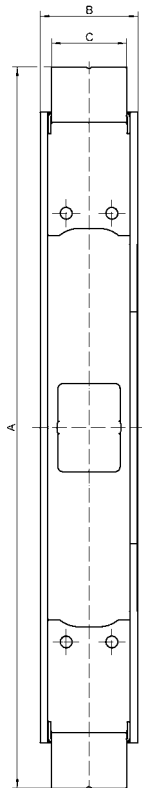

Fixing	Steel frame
Finishes	
galvanized (010), satin stainless steel (040)	
Combinations	
Hinge	TE 240 3D TE 340 3D TE 526 3D TE 527 3D TE 540 3D TE 541 3D FVZ TE 640 3D TE 645 3D TE 540 3D A8 TE 640 3D A8 TE 626 3D A8
energy transfer	TE 240 3D Energy Kit TE 340 3D Energy Kit TE 526 3D Energy Kit TE 527 3D Energy Kit TE 540 3D Energy Kit TE 640 3D Energy Kit TE 645 3D Energy Kit TE 540 3D A8 Energy Kit TE 640 3D A8 Energy Kit TE 626 3D A8 Energy Kit

Note

Please specify the exact hinge model when ordering.

TE 540 3D receiver shown. Drawings for other receiver sizes available upon request.

Model Variants	A	B	C
TE 240 3D	205.0 mm (8.071")	27.4 mm (1.079")	21.8 mm (0.858")
TE 340 3D	210.0 mm (8.268")	35.0 mm (1.378")	26.0 mm (1.024")
TE 526 3D	210.0 mm (8.268")	35.0 mm (1.378")	26.0 mm (1.024")
TE 527 3D	210.0 mm (8.268")	35.0 mm (1.378")	26.0 mm (1.024")
TE 540 3D	286.0 mm (11.260")	38.5 mm (1.516")	29.6 mm (1.165")
TE 541 3D FVZ	286.0 mm (11.260")	38.5 mm (1.516")	29.6 mm (1.165")
TE 640 3D	286.0 mm (11.260")	38.5 mm (1.516")	29.6 mm (1.165")
TE 645 3D	328.0 mm (12.913")	42.5 mm (1.673")	37.0 mm (1.457")
TE 540 3D A8	286.0 mm (11.260")	38.5 mm (1.516")	29.6 mm (1.165")
TE 640 3D A8	286.0 mm (11.260")	38.5 mm (1.516")	29.6 mm (1.165")
TE 626 3D A8	286.0 mm (11.260")	38.5 mm (1.516")	29.6 mm (1.165")