


Rainstop® L-24/20 WS

- / weatherproof drop seal
- / air permeability tested (EN 12207)
- / resistance to driving rain (EN 12208)
- / resistance to wind load (EN 12210)
- / ideal for external doors

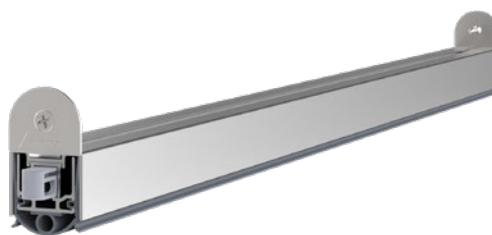

TECHNICAL DATA

Door type	hinged door
Door leaf material	timber, metal, PVC
Application	exterior door
Usability	sound insulation, smoke protection, fire protection, accessibility, driving rain
Actuation	single
Actuator	sliding acutator
Carrier material	aluminium
Surface	anodised
Surface colour	silver anodized (C-0)
Sealing profile material	self-extinguishing silicone
Sealing profile colour	grey
Door leaf	single leaf, double leaf
Opening direction	DIN L or R

DIMENSIONS

Width x height	24 x 20 mm
Length min. - length max.	230 - mm
Standard lengths	750 mm, 900 mm, 1,050 mm, 1,200 mm, 1,250 mm
Shortening	150 mm
Shortening	from standard lengths
Travel	16 mm



FIXING

Installation	in-groove
Fixing	WS - fixing brackets
Press plate required	yes
Accessories incl.	5475
Maintenance-free	yes
For retrofitting	yes

PERFORMANCE AND CERTIFICATION

Test cycles	1,000,000 cycles
MPA certificate	120005219-20-101 Rev. 01
MPA Qualitylabel	MPA NRW ZP 22-07 Klasse 4
UL	UL10C (R38166) Category H
EPD	EPD-ATD-36.0
AbZ	Z-6.100-2530

Rainstop® L-24/20 WS



ART.NO.

1-955