


Schall-Ex® Ultra WS

- / corrosion-resistant drop seal
- / salt spray tested to EN 1670, Class 5 (480 hours)
- / stainless steel springs and rust-proof internal mechanism
- / self-adjusting with overload protection
- / suitable for sound, smoke and fire doors

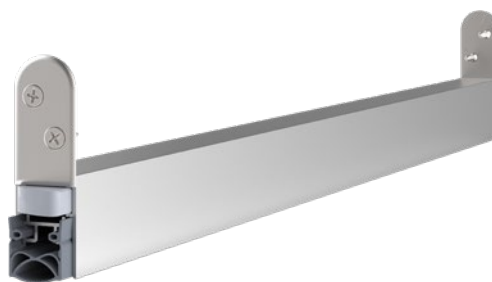

TECHNICAL DATA

Door type	hinged door, hinged gate
Door leaf material	timber, metal
Application	exterior door, interior door
Usability	sound insulation, smoke protection, fire protection, accessibility
Actuation	single
Actuator	slope actuator
Carrier material	aluminium
Surface	anodised
Surface colour	silver anodized (C-0)
Sealing profile material	self-extinguishing silicone
Sealing profile colour	grey
Door leaf	single leaf
Opening direction	DIN L or R

DIMENSIONS

Width x height	19,7 x 30 mm
Length min. - length max.	220 - mm
Standard lengths	708 mm, 833 mm, 958 mm, 1,083 mm, 1,208 mm
Shortening	125 mm
Shortening	from standard lengths
Travel	12 mm



FIXING

Installation	in-groove
Fixing	WS - fixing brackets
Press plate required	yes
Accessories incl.	5610
Maintenance-free	yes
For retrofitting	yes

Schall-Ex® Ultra WS

PERFORMANCE AND CERTIFICATION

Test cycles	1,000,000 cycles
MPA certificate	120009355.03 Rev. 02
MPA Qualitylabel	MPA NRW ZP 22-07 Klasse 4
UL	UL10C (R38166) Category J
EPD	EPD-ATD-36.0
Certifire	CF5675
AbZ	Z-6.100-2530



ART.NO.

1-291