


## Technical data sheet

# Model TST56P for pivot doors

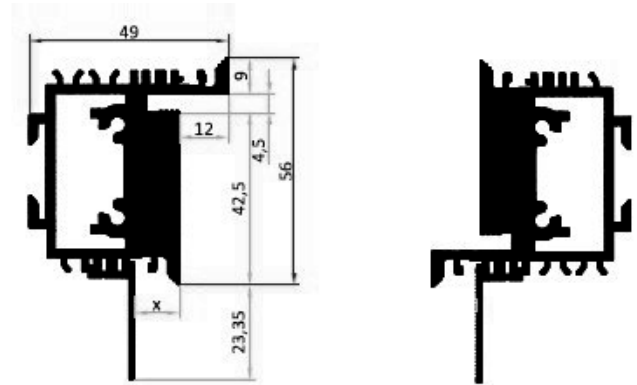

X = 11/14 mm

**pivot configuration**



**cross-piece configuration**

### Model TST56P

Suitable for solid and dry construction

Unless used for floor to ceiling doors (without head jamb), the model PIVOT is fitted with a crosspiece, which is specially designed for the use of pivot hinges.

It is produced according to the customer's specifications; After defining height / width / door leaf thickness / pivot hinge type / strike plate, the profile is cut to length, milled, completed with all accessories and packed.

The click-in mesh is essential for a strong connection to the wall and therefore no cracks appear between wall and frame. The beveled edge ensures a perfect edge formation and filigree shadow gap. Twist-in brackets ensure a fast and professional installation.

Suits standard or floor-to-ceiling doors.  
 Also available in configurations for inward and outward swing doors.