


Schall-Ex® L-15/30 WS

- / the state of the art drop seal
- / parallel drop, to minimise friction with the floor
- / no inner rail offset and protective press plate for the frame
- / automatic height and level compensation
- / very high sound insulation

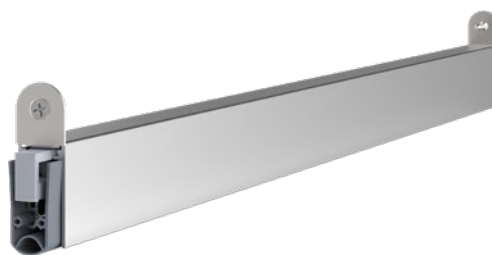

TECHNICAL DATA

Door type	hinged door
Door leaf material	timber, metal
Application	interior door
Usability	sound insulation, smoke protection, fire protection, accessibility
Actuation	single
Actuator	sliding acutator
Carrier material	aluminium
Surface	mill finish
Surface colour	silver
Sealing profile material	self-extinguishing silicone
Sealing profile colour	grey
Door leaf	single leaf, double leaf
Opening direction	DIN L or R

DIMENSIONS

Width x height	14,8 x 30 mm
Length min. - length max.	235 - mm
Standard lengths	708 mm, 833 mm, 958 mm, 1,083 mm, 1,208 mm
Shortening	125 mm
Shortening	min. delivery length cannot be shortened
Travel	20 mm



FIXING

Installation	in-groove
Fixing	WS - fixing brackets
Press plate required	no
Accessories incl.	5382
Maintenance-free	yes
For retrofitting	yes

Schall-Ex® L-15/30 WS

PERFORMANCE AND CERTIFICATION

Test cycles	1,000,000 cycles
MPA certificate	120009355.03 Rev. 02
MPA Qualitylabel	MPA NRW ZP 22-07 Klasse 4
UL	UL10C (R38166) Category H
EPD	EPD-ATD-36.0
Certifire	CF5675
AbZ	Z-6.100-2530



ART.NO.

1-880