



### Product Features

- Wired for power
- FCC, CE, and IC certified
- Metal frame
- Robust locking mechanism
- External LED indicator for lock use status
- Interior LED to illuminate storage area
- Internal USB-A port for charging devices
- ADA compliant
- Bi-directional handing
- Self-adjusting hook latch
- Visual and audible indicators

### Functionality

- Operated by RFID credential or Digilock Mobile Access credential
- 13.56 MHz RFID Standards (ISO 14443A - ISO 14443B - ISO 15693) [RFID Compatibility Statement](#)
- Manage with the Basic system
- Shared or Assigned Use
- Direct lock operation

### Installation


- Designed for new installations, installing seamlessly in the interior of the storage unit
- Compatible with non-metal doors 12-19mm thick
- Powered with an RJ45 connector

### Support


- Lifetime support
- 2-year warranty



Lock Overview

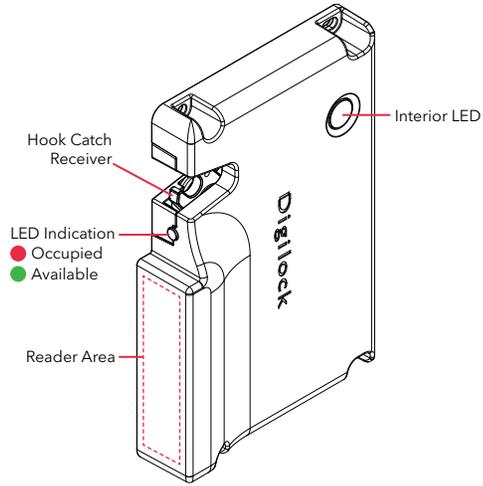


Front Side View

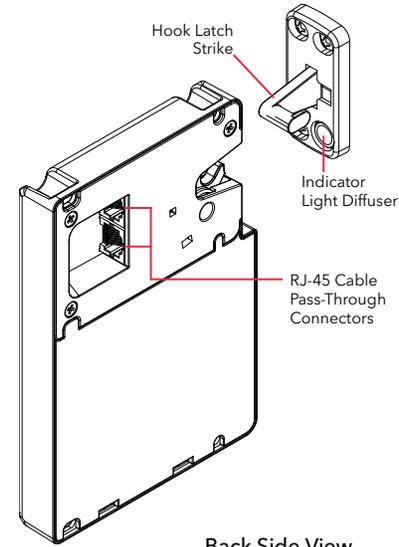


Back Side View


Overall Dimensions

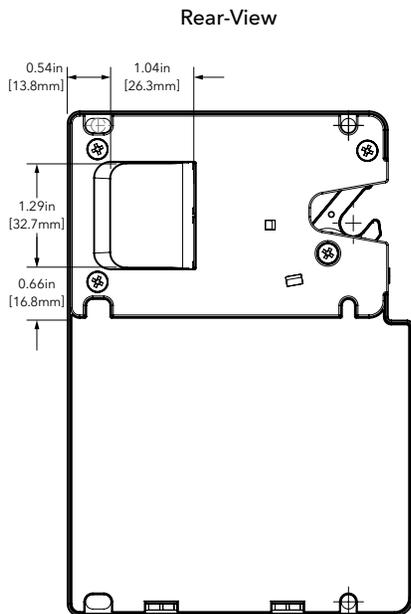

Rear-View

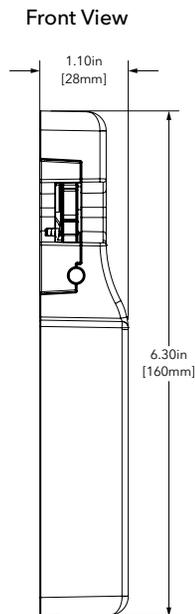

Front View

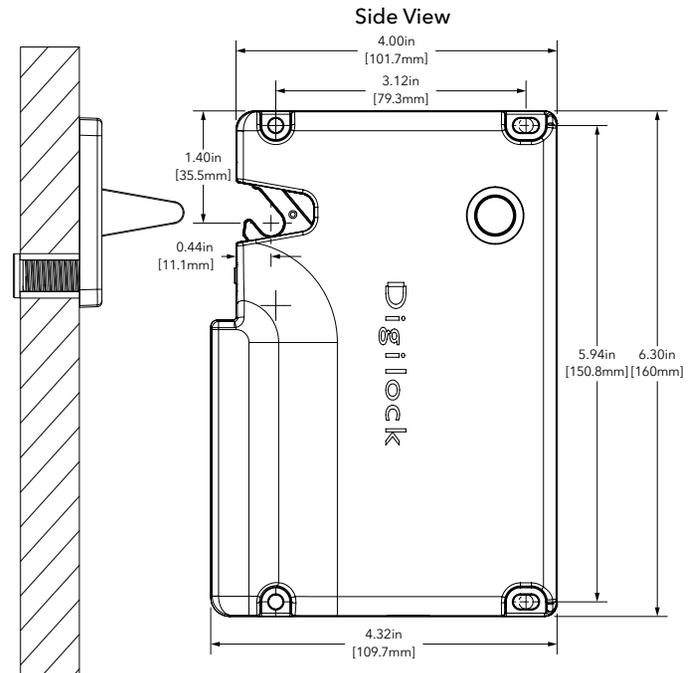

Side View

# Digilock<sup>®</sup>

## CONTACT INFORMATION

---

Scan the QR code for support or visit:  
[digilock.com/contact/support](https://digilock.com/contact/support)

