



### QUICK SPECS

Scan code for full specifications.

#### TORQUE RANGE

205 - 12,148 ft.-lbs. / 278 - 16468 Nm

#### WEIGHT

6.80 - 25.00 lbs. / 3.08 - 11.33 kg

#### SQUARE DRIVE

3/4 - 1-1/2 in.

#### RADIUS

1.16 - 2.38 in. / 30 mm - 60 mm

## MXT+™

### Hydraulic Torque Wrench

The **MXT+ Hydraulic Torque Wrench** combines the best of HYTORC's original MXT Wrench with the latest advanced technology, including coaxial reaction drive, auto-release feature and a new cycle counter. The MXT+ Wrench is constructed from aircraft-grade aluminum\* for rugged industrial use. It can handle more than 5,000 duty cycles at max torque. This wrench will outlast all others and provide consistently repeatable performance, even under the harshest conditions.

\* The 1 and the 0.7 are made of steel

- AWARD-WINNING
- 3 CONFIGURATIONS
- AUTO-RELEASE





#### EMBEDDED CYCLE COUNTER

An embedded cycle counter monitors tool use, helping you predict when maintenance is needed so your tool is always ready when you are. Having a tool that is in peak performance mode can translate to more accurate and repeatable bolting results.

#### QUICK COUPLERS

New quick couplers mean faster setup and completion — no more guessing if your connections are tight. The locking mechanism on the couplers prevents accidental disconnection.







#### MORE THAN ALL OTHERS

1. Drive (Coaxial) Reaction Arm
2. HYTORC Nut Direct Drive
3. Track Pad Fixture
4. ALCO Arm
5. Crab Nut Fixture
6. HEX Direct Drive
7. Rotatable Reaction Arm
8. Rear Reaction Sleeve 3" Down
9. HYTORC Washer Driver
10. Rear Reaction Arm

THE INDUSTRY'S  
MOST ADVANCED  
HYDRAULIC  
BOLTING SYSTEM.



#### SPLINE COVER


A spline cover comes standard with each tool to prevent damage to the tool's rear splines. Applied when using drive reaction systems to protect the rear splines and improve safety. Easy to install or remove.

#### ANGLE OF ROTATION

Both indirect and direct angle of rotation measuring is possible, as well as Yield Control Bolting.



FULL SPECIFICATIONS

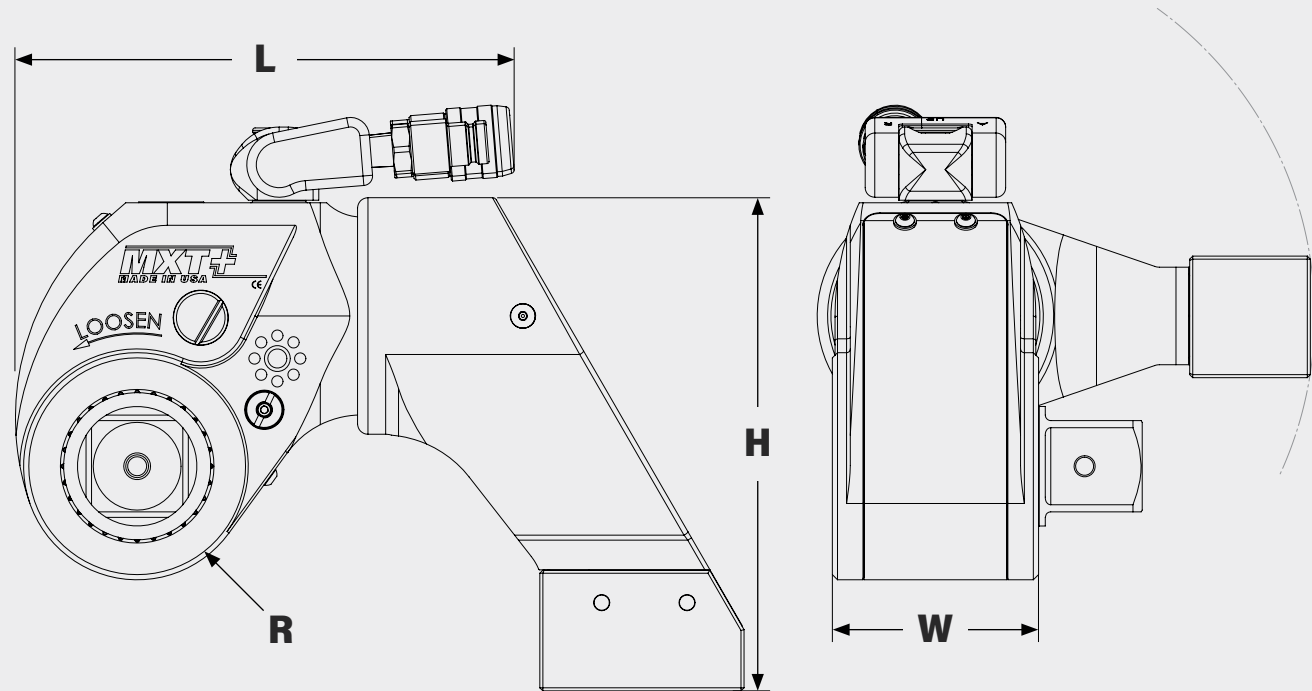

LEGEND: H = HEIGHT W = WIDTH L = LENGTH R = RADIUS

MODEL NUMBER	H	W	L	R	SQUARE DRIVE	WEIGHT	TORQUE	
IMPERIAL	in.					lbs.	ft-lbs (Min)	ft-lbs (Max)
MXTP - 01	6.38	2.18	5.17	1.16	3/4	6.80	205	1,359
MXTP - 03	6.90	2.90	6.66	1.50	1	7.59	464	3,117
MXTP - 05	9.24	3.38	8.04	1.86	1-1/2	18.50	835	5,590
MXTP - 10	11.69	4.35	10.05	2.38	1-1/2	25.00	1,831	12,148

METRIC	mm				in.	kg	Nm (Min)	Nm (Max)
MXTP - 01	162	55	131	30	3/4	3,08	278	1843
MXTP - 03	175	74	169	38	1	3,44	629	4226
MXTP - 05	235	86	204	47	1-1/2	8,39	1131	7575
MXTP - 10	297	110	255	60	1-1/2	11,33	2482	16468

COMPLETE KIT CONTENTS

- MXTP+ Hydraulic Wrench
- Rear Reaction Arm
- Coaxial Reaction Arm
- Spline Cover
- Storage Case
- Side Handle
- Calibration Certificate
- Operation Manual

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2023 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.



Headquarters:  
333 Route 17 N., Mahwah, NJ 07430  
+1-201-512-9500

Contact:  
1-800-FOR-HYTORC  
info@hytorc.com

Online:  
hytorc.com