


HYTORC

The World's Most Trusted Industrial Bolting Systems

The HYTORC Nut replaces fasteners, minimizes stresses, and covers a wide range of sizes and applications

SN-SERIES HYTORC NUT Specification Guide

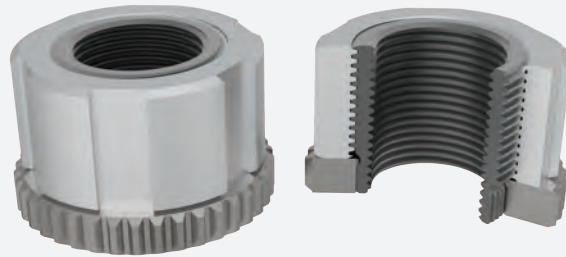

ABOUT THE SN-SERIES HYTORC NUT

The SN-Series of HYTORC Nuts covers a wide range of sizes and application. The SN-series was originally specified to overcome tight overhead restrictions. The low profile SN-Series and its equally low profile tools make them the ideal choice for applications where traditional fastening methods simply won't fit. The through-bolt design is also useful in situations where high stud extensions make standard nuts and tooling impractical. The SN-Series are typically specified when overhead obstructions are present.


HYTORC NUT APPLICATION



BENEFITS AND FEATURES

- Reaction-free bolt tensioning
- Pure tensile loads
- 100% elimination of galling on flange and stud surfaces
- Highest bolt tension accuracy and reliability available
- Lowest profile possible allows fit in very tight applications
- Footprint (Diameter = Approx. Heavy Hex Nut Across Flats) is larger than that of the clamp
- External spline on inner sleeve allows for simple economical drive
- Pass through design and tooling allows for unlimited stud protrusion
- Standard drives available for all applicable tools
- Low, Standard, Medium and High Temperature ratings available
- All thread forms available
- Reusable

SN-SERIES HYTORC NUT COMPONENTS

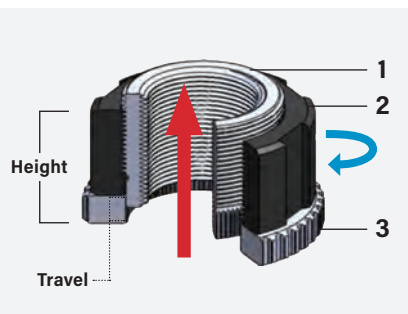

The HYTORC Nut is composed of an inner sleeve (1), outer sleeve (2), and washer (3). As the outer sleeve turns (blue arrow), the inner sleeve moves upwards (red arrow). The washer spline rotationally couples the inner sleeve with the washer preventing the inner sleeve from turning while providing a solid reaction point for turning the outer sleeve.

SN-SERIES PART NUMBER DESIGNATION

SNXX-XXXXXX-XXX

Blank Size

Thread Specification




Stud Size

Thread Pitch

Temperature

Certificates

Lubrication



BLANK SIZE

The Blank Size defines the HYTORC Nut body size – retrieve from Column 1 of the Dimensional Table located on the facing page. This size is always a two-digit number.

THREAD SPECIFICATION

IMPERIAL (in.)		
TYPE	CLASS	THREAD CODE
UN	2B	U
UN	3B	S
UNJ	3B	T
ACME	2G	W
BSW	Normal	X
BSF	Normal	Y
C-ACME	2C	Z
ACME	2G	W
STUB ACME	2G	R

METRIC (mm)		
TYPE	CLASS	THREAD CODE
METRIC	6H6G	M
METRIC	4H5H	K
MJ	4H5H	N
TRAPEZOID	7H	P

STUD SIZE

IMPERIAL (in.)	
STUD SIZE	SIZE CODE
5/8	010
1	100
2-1/2	208
4-1/4	404

METRIC (mm)	
STUD SIZE	SIZE CODE
5	005
10	010
100	100
150	150

THREAD PITCH

IMPERIAL (in.)	
THREADS PER IN.	PITCH CODE (TPI)
4	04
4-1/2	45
8	08
12	12

METRIC (mm)	
MM PER THREAD	PITCH CODE
1	01
3	03
3.5	35
6	06

TEMPERATURE

For best performance, Standard Temperature should be specified unless the environment specifically requires otherwise. Temperature ratings may not apply to applications that require CREEP resistance. Please inquire with HYTORC Engineering for applications with long durations at temperatures **greater than 800°F (426°C)**.

SERVICE TEMPERATURE RATINGS

H = High ≤1000°F (≤538°C)

M = Medium ≤900°F (≤482°C)

S = Standard ≤550°F (≤288°C)

L = Low -150°F to 32°F (-101°C to 0°C)

LUBRICATION

Lubrication can have implications on load characteristics, temperature ratings and ease of removal. Please consult HYTORC lubrication data sheets to guide your selection process. Alternative lubricants are available upon request. The most common lubricants are:

R Molykote 1000 Paste

S Molykote P-37 Anti-Seize Paste (Standard)

T Molykote GN Metal Assembly Paste

W N-7000 Loctite Anti-Seize

MATERIAL CERTIFICATE PACKAGE*

A Certificate of Compliance (Standard)

B JQP21000

C JQP22000

D JQP31000

E JQP32000

F JQP0500

G JQP10510

*Please see HYTORC quality level data for further details.

STEPS FOR SPECIFYING THE PROPER SIZE

SIZE SELECTION CHART

1. Identify **Blank Size** from table below. (Cross reference this number from the row with the proper **Nominal Stud Size**).
2. **Outside Diameter** for this Blank Size should not interfere with adjacent nuts or other application constraints (such as a small spot face).
3. Verify that the **Max Stroke** is sufficient for your application.
4. Verify that there is sufficient overhead clearance for access with tooling.
5. Use the part number template from the adjacent page to generate the part number.

IMPERIAL (in.)					
BLANK SIZE	STUD SIZE CODE	NOMINAL STUD SIZE	OUTSIDE DIAMETER	HEIGHT	MAX STROKE
03	100	1	2.050	1.214	0.225
04	10	1-1/8	2.313	1.360	0.249
05	104	1-1/4	2.500	1.520	0.281
06	10	1-3/8	2.688	1.670	0.310
07	108	1-1/2	2.938	1.821	0.338
08	11	1-5/8	3.250	1.974	0.366
09	112	1-3/4	3.417	2.125	0.394
10	114	1-7/8	3.667	2.277	0.422
11	200	2	3.900	2.429	0.450
12	204	2-1/4	4.300	2.732	0.506
13	208	2-1/2	4.800	3.035	0.563
14	212	2-3/4	5.250	3.338	0.619
15	214	2-7/8	5.375	3.440	0.638
16	300	3	5.750	3.643	0.675
17	302	-	5.750	3.824	0.709
18	304	3-1/4	6.083	3.945	0.731
19	308	3-1/2	6.667	4.250	0.788
20	312	3-3/4	7.000	4.550	0.844
21	400	4	7.300	4.857	0.900
22	404	4-1/4	7.750	5.159	0.956
23	408	4-1/2	8.200	5.463	1.013
24	412	4-3/4	8.700	5.930	1.069
25	500	5	9.125	6.070	1.125
26	504	5-1/4	-	-	-
27	508	5-1/2	10.000	6.677	1.238
28	600	6	10.875	7.284	1.350

All dimensions for reference only.

BLANK SIZE

This is the basic body size for the HYTORC Nut. Any desired thread up to the **Nominal Stud Size** can be cut into each **Blank Size**. Cross-reference this number from the row with the proper **Nominal Stud Size**. Verify that the **Outside Diameter** for this **Blank Size** will not interfere with adjacent nuts or other application constraints (such as a small spot face).

NOMINAL STUD SIZE

This is the largest stud that will fit a particular **Blank Size**. All HYTORC Nut blanks can be specified with threads smaller than the **Nominal Stud Size**.

MAX STROKE

Verify that the **Max Stroke** is sufficient for the application. HYTORC Nuts have maximum stroke lengths that are limited by the height of the splined washer. More stroke may be needed to accommodate gasket compression or an extraordinarily long joint length. Consult with a HYTORC Applications Engineer for special extended stroke HYTORC Nuts.

METRIC (MM)					
BLANK SIZE	STUD SIZE	NOMINAL STUD SIZE	OUTSIDE DIAMETER	HEIGHT	MAX STROKE
03	024	M24	52.07	30.73	5.71
04	027	M27	58.67	34.54	6.47
05	030	M30	63.50	38.56	7.23
06	033	M33	68.33	42.42	7.81
07	036	M36/39	74.68	46.25	8.57
08	039	M42	82.55	50.14	9.33
09	042	M45	86.87	53.98	10.09
10	045	M48	93.22	57.91	10.66
11	048	M52	99.06	61.72	11.43
12	052	M56	109.22	69.34	12.95
13	056	M64	121.92	77.22	14.28
14	064	M70	133.35	84.84	15.81
15	070	M72	136.65	87.38	16.19
16	072	M76	146.05	92.53	17.14
17	076	M80	146.05	97.03	18.09
18	080	-	154.43	100.33	18.66
19	-	M90	169.42	107.95	20.95
20	090	M95	177.80	115.57	21.52
21	095	M100	185.42	123.44	22.86
22	100	M110	196.85	131.06	24.38
23	110	M115	208.28	138.76	25.71
24	115	M120	220.98	150.62	27.24
25	120	M125	231.90	154.18	28.57
26	125	M130	-	-	-
27	130	M140	254.00	169.67	31.43
28	140	M152	276.35	184.91	34.29

All dimensions for reference only.

STUD SIZE

This is the HYTORC code used to indicate the **Nominal Stud Size**.

IMPERIAL: First digit signifies the whole number of inches. Add two digits to signify the number of 1/16 of an inch — (108 = 1" + 8/16" = 1-1/2").


METRIC: The three digits signify the whole number in millimeters — (024 = M24, 110 = M110).

HEIGHT

This is the overall height of the standard HYTORC Nut for this **Blank Size**. Tooling will require additional overhead space. This is not the **Height** of the stud protrusion. Consult with a HYTORC Applications Engineer when custom height HYTORC Nuts are required.

ADDITIONAL FACTS AND INFORMATION

SAMPLE LOAD CHART

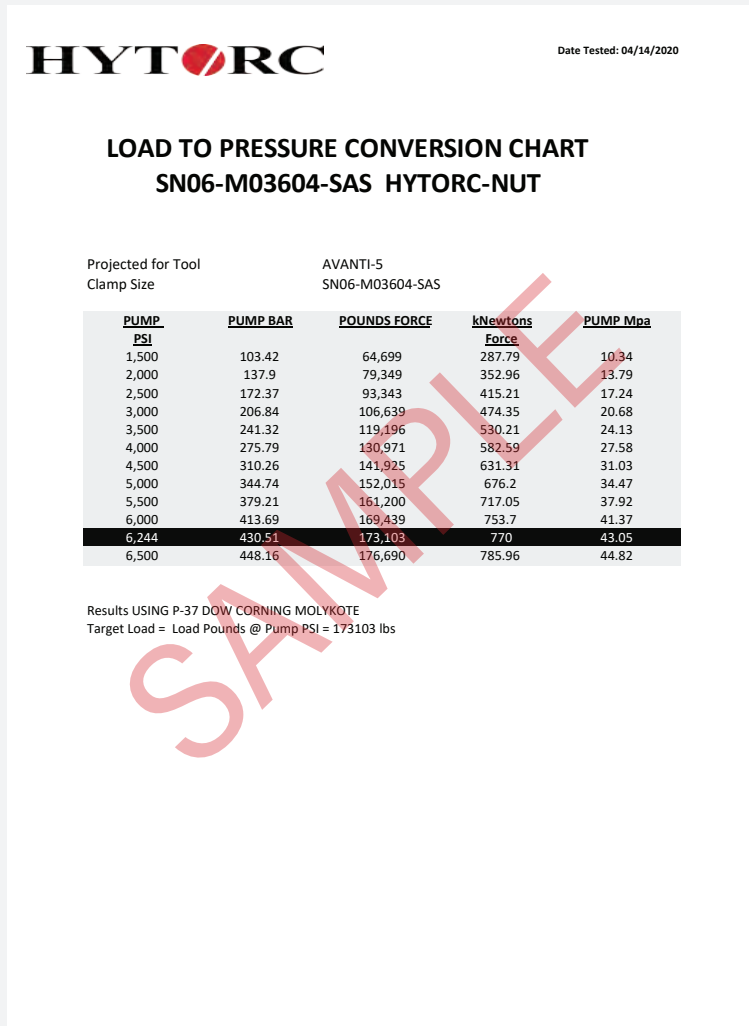

MATERIALS

HYTORC Nut material selection is based on the service temperature rating of the HYTORC Nut. Please consult with a HYTORC Applications Engineer for a detailed specification on the materials used for each component of the HYTORC Nut.

LOAD CHARTS

All HYTORC Nuts can be made available with a Load Chart. Load Charts provide data points showing the tool's hydraulic pressure vs. the bolt load that will be attained. A load chart can be created for any tool with any HYTORC Nut.

SPECIALS

When components fall outside of the boundaries of our standard part numbering system, they become specials and are assigned a special part number. The following list exemplifies some of the variations that could make your HYTORC Nut specification a special:

- Modified or non-standard thread sizes such as those for oversized studs
- Extended or shortened HYTORC Nut height requirements
- Extended stroke requirements
- Special coating requirements such as galvanizing or xylan
- Non-standard materials, testing, or certification requirements

APPLICATION TIPS

Measurement of the thread pitch is the most error-prone portion of HYTORC Nut specification. The easiest way to measure pitch is with a pitch gauge. Alternatively, please provide HYTORC with a sample of the stud. Special coatings can cause dimensional variations on studs and nuts, i.e. Galvanized studs often have a coating build up that effectively changes the thread size. If the application studs have coatings, special care should be taken to determine the actual thread size. A standard HYTORC Nut will not fit a standard UN stud thread if a thick coating is applied. In these situations it will typically be best to supply HYTORC with a sample stud.

AVAILABLE DRIVES

Please contact HYTORC to request available drives and to specify non-standard HYTORC Nuts.

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2020 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.



Headquarters:
333 Route 17 N., Mahwah, NJ 07430
+1-201-512-9500

Email:
info@hytorc.com

Phone:
1-800-FOR-HYTORC

Online:
hytorc.com