
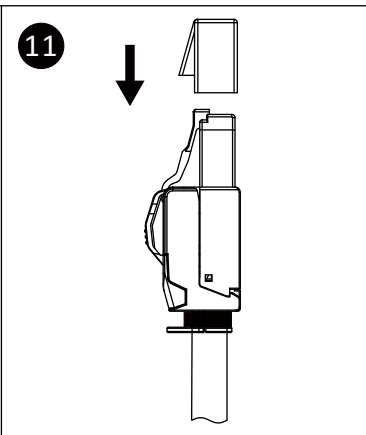
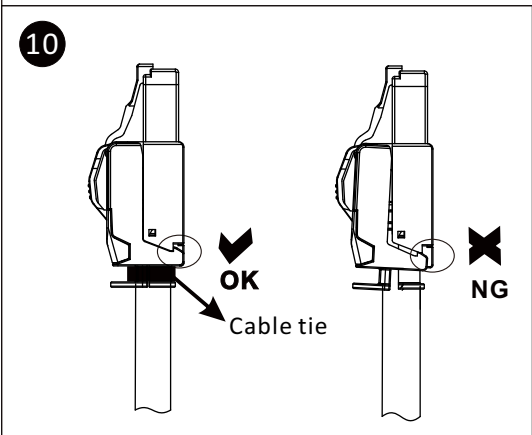
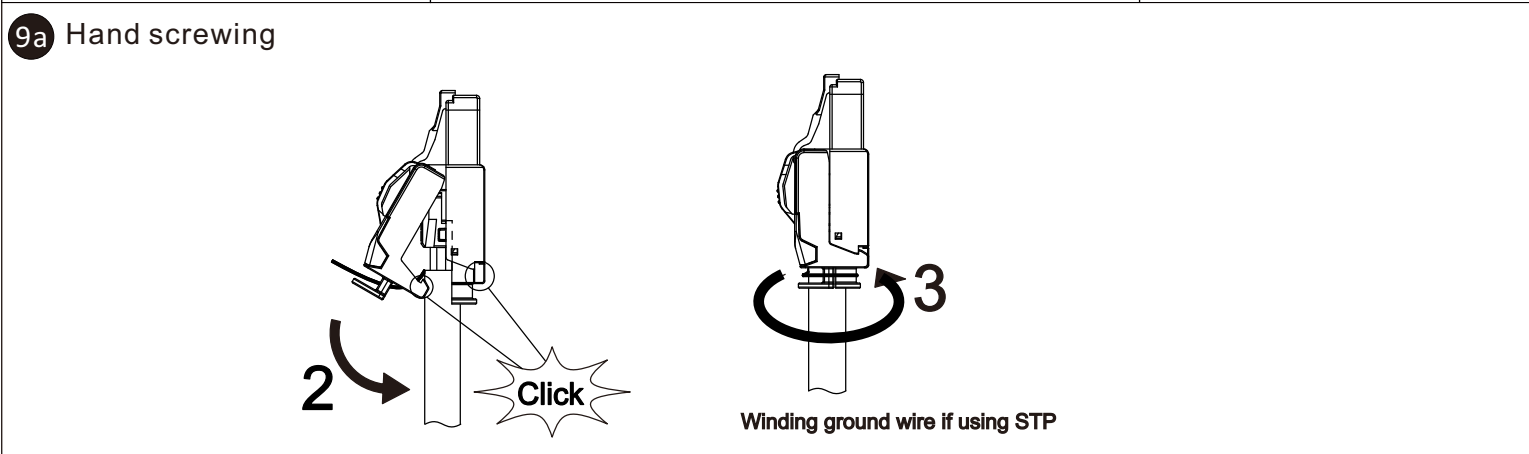
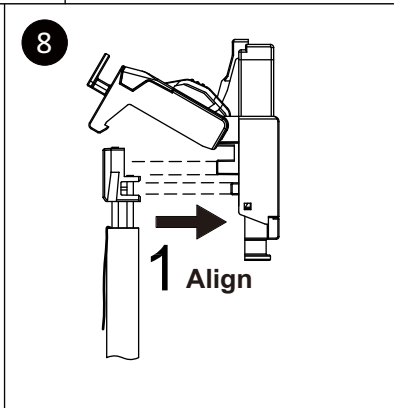
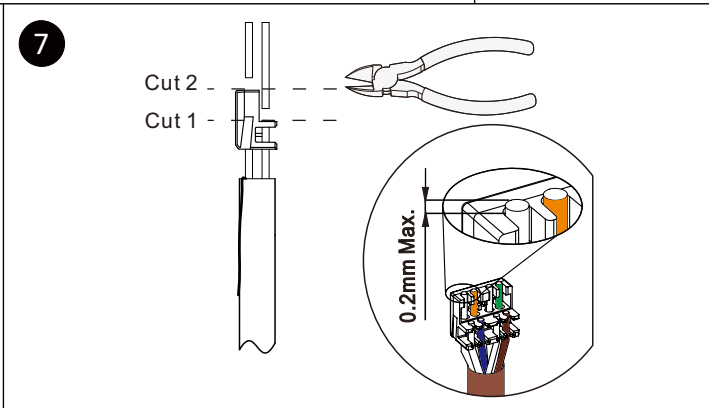
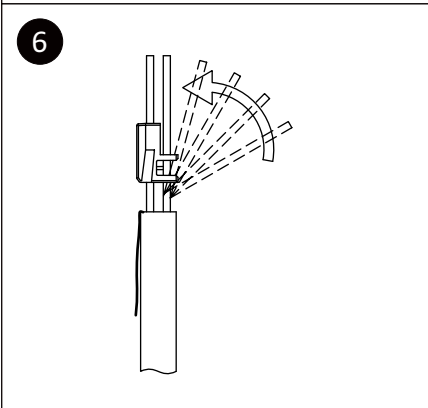
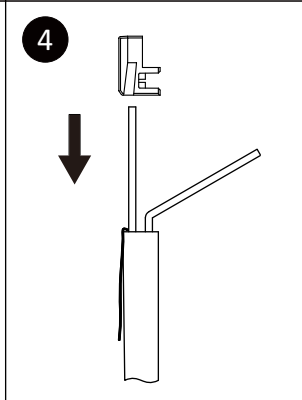
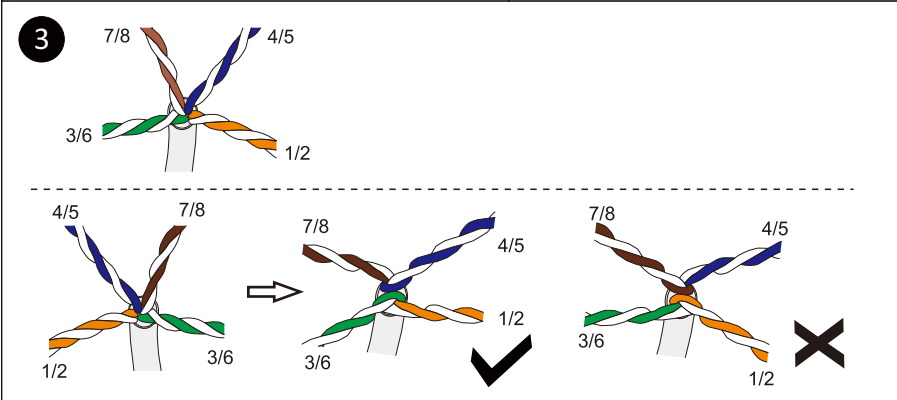


Field Termination Plug User Guide

C6ATTF

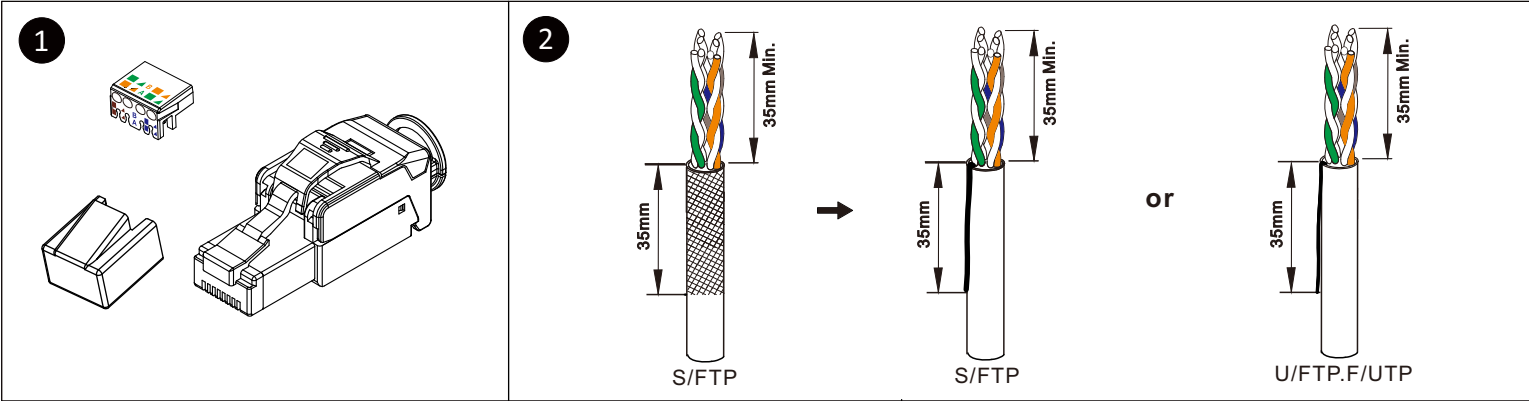

12

Legend

W White
G Green
O Orange
BL Blue
BR Brown

| | | | | | | | |
|-----|---|-----|----|------|---|------|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| W-G | G | W-O | BL | W-BL | O | W-BR | BR |

Pin assignment T568A

| | | | | | | | |
|-----|---|-----|----|------|---|------|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| W-O | O | W-G | BL | W-BL | G | W-BR | BR |

Pin assignment T568B

| | Solid | Stranded | Cable (O.D.) |
|---------------------|----------|----------|--------------|
| C6 _A /C7 | 23~26AWG | 23~26AWG | 6.0~7.5mm |
| C8 | 22~24AWG | 22~24AWG | 7.0~8.9mm |