RCA AUDIO CABLES

LOCKED & LOADED

The v16 locking connectors create a solid, continuous pressure providing a secure and reliable connection with the highest quality signal transfer.

QUALITY SOUND

Large 26-gauge oxygen-free copper core strands handle the deepest bass frequencies while the higher frequencies skim along the silver-plated surface. This combination carries even the most demanding signals without altering or coloring, resulting in true audio reproduction.

FIGHT THE NOISE

Cables are continuously bombarded with electrical and magentic pollution that rob music of its clarity by injecting noise into the signal. The v16's three separate layers have been integrated to trap, isolate and reject both transmitted and electromagnetic pollution, allowing the signal to travel noise-free.

ARMOR TOUGH

Just as chain-mail protected ancient warriors from piercing blows, so does the woven cotton mesh protecting the v16 cables from environmental attacks that are sure to come.





RCA CABLE SPECS

GOLD-PLATED COPPER RCA TIPS WITH CONTINUOUS LOCKING BARREL

ENAMEL PAINTED COLOR BANDS FOR DURABLE IDENTIFICATION

26AWG OXYGEN-FREE COPP CORE FOR MAXIMUM BASS

SILVER PLATING FOR TRUE MIDRANGE & HIGH EREQUENCY FIDELITY

M-JACKET INSULATES EACH

NON-CONDUCTIVE COTTON FILLER

POLYETHYLENE FOAM INSULATED JACKET


ALUMINUM-FACED MYLAR FOIL FOR EMI REJECTION

85% COVERAGE BRAIDED TINNED COPPER FOR EMITTED NOISE REJECTION

PVC OUTER JACKET FOR STRENGTH & FLEXIBILITY

WOVEN COTTON CABLE SHIELD



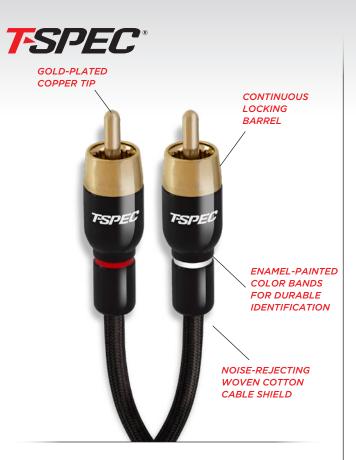




- Gold-plated copper RCA tips
- Oxygen-free copper core
- Silver plating for true frequency fidelity
- M-jacket insulates each channel separately
- PVC outer jacket for strength and stability
- · Packaged in high-end retail box

2-CHANNEL

1.5'	0.45m	V16RCA-1-52
3'	0.91m	V16RCA-32
6'	1.83m	V16RCA-62
10'	3.05m	V16RCA-102
17'	4.27m	V16RCA-172
Y-1 (1F-2M)	0.15m	V16RCA-Y1
Y-2 (1M-2F)	0.15m	V16RCA-Y2

4-CHANNEL

17' 5.18m V16RCA-17

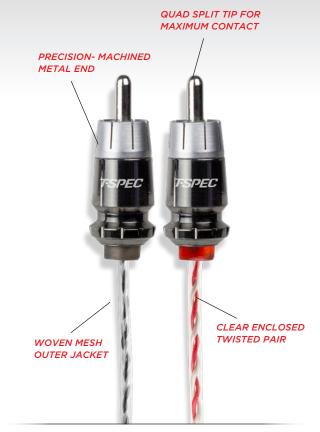



- Mini metal RCA ends
- Full oxygen-free copper
- Twisted pair construction for noise reduction
- High-quality braided jacket
- Packaged in high-end retail box


2-CHANNEL

1.5'	0.45m	V12R1-5
3'	0.91m	V12R3
6'	1.83m	V12R6
10'	3.05m	V12R10
14'	4.27m	V12R14
17'	5.18m	V12R17
20'	6.10m	V12R20
Y-1 (1F-2M)	0.15m	V12RY1
Y-2 (1M-2F)	0.15m	V12RY2

4-CHANNEL

17'	5.18m	V12R174



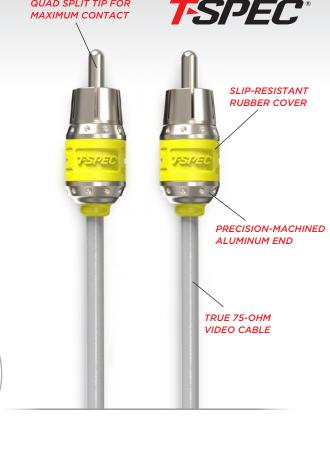



RCA v10 SERIES AUDIO CABLES

- Dual twist for improved noise rejection
- Ultra-flexible PVC blended jacket
- Patented high-tolerance, compact machined metal end
- Quad split tip for maximum contact area
- Made with BC-5W2 marine-grade cable
- · Packaged in high-end retail box

2-CHANNEL

1.5'	0.45m	V10R1-5
3'	0.91m	V10R3
6'	1.83m	V10R6
10'	3.05m	V10R10
14'	4.27m	V10R14
17'	5.18m	V10R17
20'	6.10m	V10R20
Y-1 (1F-2M)	0.15m	V10RY1
Y-2 (1M-2F)	0.15m	V10RY2

4-CHANNEL

17'	5.18m	V10R174

6-CHANNEL

17' 5.18m V	10R176
-------------	--------



• True 75-ohm video cable

QUAD SPLIT TIP FOR


- Ultra-flexible PVC blended jacket
- Patented high-tolerance, compact machined metal end
- Quad split tip for maximum contact area
- Made with BC-5W2 marine-grade cable
- · Packaged in high-end retail box


2-CHANNEL

3'	0.91m	V10R3V
9'	2.74m	V10R9V
20'	6.10m	V10R20V





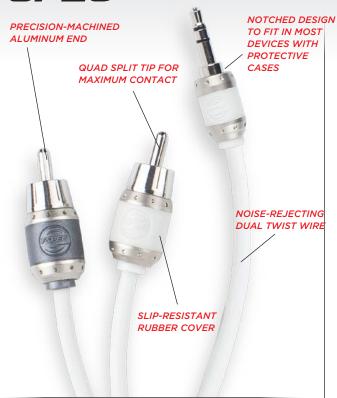

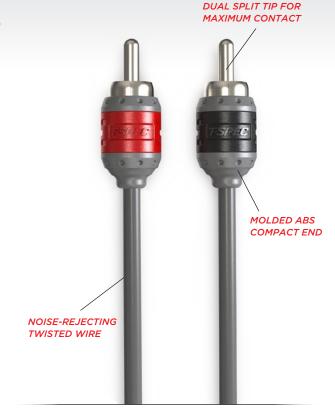



- Dual twist for improved noise rejection
- Ultra-flexible PVC blended jacket
- Patented high-tolerance, compact machined metal end
- Quad split tip for maximum contact area
- Made with BC-5W2 marine-grade cable
- Packaged in high-end retail box

2-CHANNEL

6'	1.83m	V10R35-6




- Twisted wire design for increased noise rejection
- Ultra-flexible PVC blended jacket
- High-tolerance compact molded ABS end
- · Dual split tip for maximum contact area
- Packaged in high-end retail box

2-CHANNEL

1.5'	0.45m	V8R1-5
3'	0.91m	V8R3
6'	1.83m	V8R6
10'	3.05m	V8R10
14'	4.27m	V8R14
17'	5.18m	V8R17
20'	6.10m	V8R20
Y-1 (1F-2M)	0.15m	V8RY1
Y-2 (1M-2F)	0.15m	V8RY2

4-CHANNEL

17;	5 18m	V8R174
17	5.18M	VORIZ

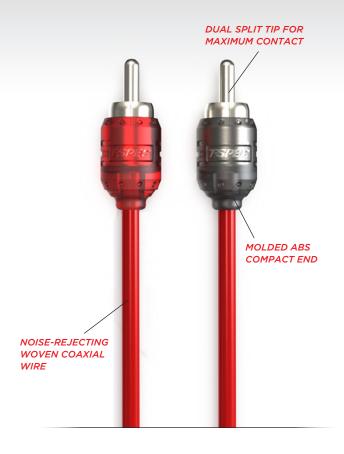



RCA v6 SERIES AUDIO CABLES

- Woven coaxial design for increased noise rejection
- Ultra-flexible PVC blended jacket
- High-tolerance compact molded ABS end
- · Dual split tip for maximum contact area
- Packaged in high-end retail box

2-CHANNEL	10-PACK

1.5'	0.45m	V6R1-5	V6R1-5-10
3'	0.91m	V6R3	V6R3-10
6'	1.83m	V6R6	V6R6-10
10'	3.05m	V6R10	V6R10-10
14'	4.27m	V6R14	V6R14-10
17'	5.18m	V6R17	V6R17-10
20'	6.10m	V6R20	V6R20-10
Y-1 (1F-2M)	0.15m	V6RY1	V6RY1-10
Y-2 (1M-2F)	0.15m	V6RY2	V6RY2-10

4-CHANNEL 10-PACK 17' 5.18m V6R174 V6R174-10





VIDEO v6 SERIES VIDEO CABLES


- True 75-ohm video cable
- Ultra-flexible PVC blended jacket
- High-tolerance compact molded ABS end
- Dual split tip for maximum contact area
- Packaged in resealable retail polybag

SINGLE CHANNEL

6'	1.83m	V6R6V
9'	2.74m	V6R9V
20'	6.10m	V6R20V





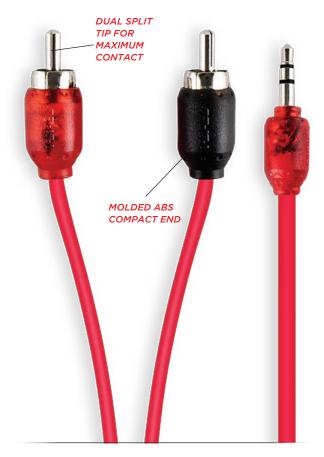



- Double layer woven coaxial design for increased noise rejection
- Ultra-flexible PVC blended jacket
- High-tolerance compact molded ABS end
- Dual split tip for maximum contact area
- Packaged in resealable retail polybag

2-CHANNEL

6"	.15m	V6R35-6IN
36"	.91m	V6R35-36IN
72"	1.83m	V6R35-72IN



FEMALE TO FEMALE ADAPTER

- Nickel-plated
- RCA barrel adapters
- · Female to female
- 2-pack

V6RCA-BFN



MALE TO MALE ADAPTER

- Nickel-plated
- RCA barrel adapters
- Male to male
- 2-pack

V6RCA-BMN

SPOOLED BULK WIRE

The performance of your car audio system is only as good as its weakest link. Many wire companies today will have you believe that a cheap cable will save you money and get the job done, but the truth is that below-specification cables will rob current from your amplifier reducing power output by as much as 50%!!! T-SPEC has once again chosen to take the high road with a full line of ABOVE SPEC cables that exceed CEA and ANSI specifications for gauge size. v12 above-spec wire is an industry-first providing greater current capability for your stereo's sensitive electronics.









- Exceeds CEA and ANSI specifications for wire gauge
- Full virgin copper construction
- High strand count for maximum flexibility
- Ultra-flexible PVC blended jacket
- BC-5W2 marine compliant

1/0 ABOVE AWG SPEC

50'	15.24m	MATTE RED	V12PW-1050
50'	15.24m	MATTE BLACK	V12GW-1050

4 ABOVE AWG SPEC

100'	30.48m	MATTE RED	V12PW-4100
100'	30.48m	MATTE BLACK	V12GW-4100







- Meets CEA and ANSI specification for wire gauge
- Fully tinned virgin copper construction
- High strand count for maximum flexibility
- Ultra-flexible PVC blended jacket
- BC-5W2 marine compliant



1/0 AWG

50'	15.24m	MATTE PEARL WHITE	V10PW-1050
50'	15.24m	MATTE BLACK	V10GW-1050
50'	15.24m	MATTE RED	V10PW-1RD50

4 AWG

100'	30.48m	MATTE PEARL WHITE	V10PW-4100
100'	30.48m	MATTE BLACK	V10GW-4100
100'	30.48 m	MATTE RED	V10PW-4RD100

8 AWG

250'	76.20m	MATTE BLACK	V10GW-8250
250'	76.20m	MATTE RED	V10PW-8RD250



- Meets CEA and ANSI specifications for wire gauge
- Fully tinned virgin copper construction
- High strand count for maximum flexibility
- Ultra-flexible PVC blended jacket
- BC-5W2 marine compliant



125'	38.10m	BLACK	V10SW12125-BK
125'	38.10m	WHITE/BLACK	V10SW12125-WB

16 AWG

250'	76.20m	BLACK	V10SW16250-BK
500'	152.4m	BLACK	V10SW16500-BK
250'	76.20m	WHITE/BLACK	V10SW16250-WB
500'	152.4m	WHITE/BLACK	V10SW16500-WB







- Full virgin copper construction
- High strand count for maximum flexibility
- Ultra-flexible PVC blended jacket
- BC-5W2 marine compliant



1/0 GAUGE

50'	15.24m	SOLID BLUE	V8GT10B-50
50'	15.24m	SOLID BLACK	V8GT10BK-50
50'	15.24m	SOLID RED	V8GT10RD-50

4 GAUGE

100'	30.48m	SOLID BLUE	V8GT4B-100
100'	30.48m	SOLID BLACK	V8GT4BK-100
100'	30.48m	SOLID RED	V8GT4R-100

8 GAUGE

250'	76.20m	SOLID BLUE	V8GT8B-250
250'	76.20m	SOLID BLACK	V8GT8BK-250
250'	76.20m	SOLID RED	V8GT8R-250





FRONT CHANNEL SPEAKER CABLE

18 GAUGE 4 CONDUCTOR

- 250' flexible cable
- (4) 18 gauge conductors
- Full spec OFC
- WH, WH/BK, GY, GY/BK

VSWF418-250



REAR CHANNEL SPEAKER CABLE

18 GAUGE 4 CONDUCTOR

- 250' flexible cable
- (4) 18 gauge conductors
- Full spec OFC
- GN, GN/BK, VT,VT/BK

VSWR418-250

ENOUGH WIRE ACCESSORIES FOR TWO SEPARATE RUNS

SPEAKER CABLE

18 GAUGE 11 CONDUCTOR

- 20' flexible over-molded braided cable
- (11) 18 gauge conductors
- Full spec OFC, 5 pair plus remote
- Outer jacket heat shrink and heat shrink wire labels included
- Red and black ferrules included
- WH, WH/BK, GY, GY/BK, GN, GN/BK, VT, VT/BK, OR, OR/BK, BL

VSW1118



ENOUGH WIRE ACCESSORIES FOR TWO SEPARATE RUNS

SPEAKER CABLE

16 GAUGE 11 CONDUCTOR

- 20' flexible over-molded braided cable
- (11) 16 gauge conductors
- Full spec OFC, 5 pair plus remote
- Outer jacket heat shrink and heat shrink wire labels included
- Red and black ferrules included
- WH, WH/BK, GY, GY/BK, GN, GN/BK, VT, VT/BK, OR, OR/BK, BL

VSW1116



BATTERY TERMINAL

Today's cars are smaller and the space under the hood is also at a premium. There's no longer unlimited room for large battery terminals and complex wiring. T-SPEC recognizes this and has responded with a full line of compact brass battery terminals designed to fit where others simply will not. The new Add-a-Post system creates an additional battery post to retain the sophisticated fused battery terminal found in modern vehicles. These universal terminals are constructed from solid brass for maximum conductivity and feature the easy installation, single tool T20 screws.

BATTERY TERMINAL

1/0 -10 AWG 3-POSITION

- (2) 1/0 AWG 10 AWG plus (2) 4 AWG 10 AWG In
- · Compact design for simpler installation
- · Solid brass construction for maximum conductivity
- · Nickel finish for durability
- Positive and negative marker plates included
- · Negative post sleeve included

V-BATT-TML





GM POST

STANDARD & EXTENDED **BATTERY TERMINAL**

- · Standard length battery post terminal
- Designer for GM side post style batteries
- · Solid brass construction

STANDARD LENGTH - VGMS

EXTENDED LENGTH - VGML



BATTERY TERMINAL

1/0 -10 AWG 8-POSITION

- Add-a-Post system for retention of the factory terminal connector
- (4) 4/8/10 AWG outputs (set screw)
- (4) 1/0-10 AWG outputs (ring terminal)
- · Designed for positive or negative battery post use (adapter sleeve included)
- Includes (1) positive and (1) negative bolt-on post for retaining factory vehicle terminal
- · Solid brass construction
- · Black nickel finish
- T20 Torx® screws
- Gate Lock[™] technology

VBTPN

FUSE HOLDERS

Fusing an aftermarket car stereo system provides protection for your car and your car stereo. No fuse system provides better protection than T-SPEC. The T-SPEC compact brass designs are constructed from solid brass and are smaller than anything else in the industry. With the new one tool T20 Torx[®] screws and 360 degree rotatable base, installation has never been faster, easier, and more reliable.



ANL 1/0-4 AWG FUSE HOLDER

- Water-resistant
- 360° rotatable base mount
- TPE wrapped soft touch

VANL



MANL 4/8 AWG FUSE HOLDER

- Water-resistant
- Solid brass construction
- · Black nickel finish

SINGLE PACK - VMANL

10 PACK - VMANL-10



AGU 4/8 AWG FUSE HOLDER

- Water-resistant
- T20 Torx® screws
- Gate Lock[™] technology

SINGLE PACK - VAGU

10 PACK - VAGU-10



ANL1/0-4 AWG FUSE HOLDER

- TPE wrapped soft touch
- Dual sizes gasket set

VANL1



MANL 1/0-4 AWG FUSE HOLDER

- Solid brass construction
- · Black nickel finish

VMANL1



DUAL MANL1/0-4/8 AWG FUSE HOLDER

- T20 Torx® screws
- Gate Lock[™] technology

VDMANL

POWER & GROUND DISTRIBUTION BLOCKS

We make it easy to manage multiple amplifiers and wiring for your vehicle's audio system. Find just the right fit for your installation in our impressive assortment of power and ground distribution blocks, all constructed with quality materials and built to last. Premium features such as solid brass construction, water-resistance, stylish black nickel finish, T20 Torx® screws Gate Lock™ technology, and more make these products the best choice for any car audio upgrade.







DUAL-INPUT 4-WAY POWER DISTRIBUTION BLOCK

- Dual 0/1 AWG positive In
- Dual 0/1 AWG negative In
- (4) Mated 4 AWG output sets with remote distribution
- Built-in amplification relay for boosting the current rating of the amplifier turn-on wire, distributing it across all 4 outputs
- Anti-short sub-cover to isolate the ground bar and terminals
- (4) Independently MANL fused positive circuits
- Blown Fuse Indicator (BFI) LED for each circuit

- (3) Rapid replacement spare MANL fuse locations built inside the case
- One tool for hardware installation using T-SPEC T20 Torx® screws with Gate Lock™ technology
- Satin gunmetal finished 5mm brass bus bars for power and ground distribution
- TPE wrapped soft-touch cover with modern aesthetics

VBDB4



BENEFITS

positive inputs.

TSPEC's VBDB4 is a unique distribution block that combines the most practical, sophisticated features in its class with the highest performance on the market to unleash the full power of a car audio system.

This 4-way power ground remote distribution block has dual 0/1 AWG ground inputs to match the dual 0/1 AWG

PREMIUM MATERIALS AND FINISH

Premium construction and materials allow for a highly conductive block with 5mm thick solid brass bus bars and a satin gunmetal finish. A TPE wrapped soft-touch cover is the perfect match to T-SPEC's other car audio components, giving a photo-worthy finished product.

T20 TORX® SCREWS WITH GATE-LOCK TECHNOLOGY

Gate Lock™ technology allows for a secure connection without the need for reducer rings. The hardware uses T20 Torx® screws for every screw on the distribution block making them an easy one-tool installation.



RAPID REPLACEMENT SPARE MANL FUSES

3 rapid replacement spare MANL fuse locations built into the case make replacement simple and easy.

4 MATED OUTPUT SETS

For quick identification and pristine installation appearance, 4 mated outputs group the remote, 4 AWG power, and 4 ground together.

BLOWN FUSE INDICATOR

Spend less time guessing
which fuse to replace! A Blown
Fuse Indicator (BFI) LED light
for each circuit indicates which fuse has
blown so that no time is lost trying to identify
which one to replace.

INTEGRATED REMOTE DISTRIBUTION

The VBDB4 can turn mice into men with the remote booster PCB. This hidden circuitry converts the traditionally low current remote input into a 4-amp high current. That current is then distributed across all 4 outputs for a truly unique integrated remote distribution.





MANL

2-POSITION DISTRIBUTION BLOCK

- (1) 1/0-4 AWG In/(2) 4/8 AWG Out
- TPE wrapped soft touch
- Dual-size gasket set
- · Water-resistant
- · Solid brass construction
- Black nickel finish
- T20 Torx® screws
- Gate Lock[™] technology

VFDB2



4-POSITION DISTRIBUTION BLOCK

- (1) 1/0-4 AWG In/(4) 4/8 AWG Out
- TPE wrapped soft touch
- Dual-size gasket set
- · Water-resistant
- Solid brass construction
- · Black nickel finish
- T20 Torx® screws
- Gate Lock[™] technology

VFDB4



MANL

2-POSITION ALL-IN-ONE DISTRIBUTION BLOCK

- (2 positive) 1/0-4 AWG In/(2 positive) 4/8 AWG Out
- (1 negative) 1/0-4 AWG In/(2 negative) 4/8 AWG Out
- · TPE wrapped soft touch
- Dual-size gasket set
- · Water-resistant
- · Solid brass construction
- · Black nickel finish
- T20 Torx® screws
- Gate Lock[™] technology

VPNB2



MANL

4-POSITION ALL-IN-ONE DISTRIBUTION BLOCK

- (2 positive) 1/0-4 AWG In/(4 positive) 4/8 AWG Out
- (1 negative) 1/0-4 AWG In/(4 negative) 4/8 AWG Out
- · TPE wrapped soft touch
- Dual-size gasket set
- · Water-resistant
- · Solid brass construction
- · Black nickel finish
- T20 Torx® screws
- Gate Lock[™] technology

VPNB4



BLOCK

2-POSITION DISTRIBUTION

- (1) 1/0-4 AWG In
- (2) 1/0-4 AWG Out
- TPE wrapped soft touch
- Dual-size gasket set
- Water-resistant
- Solid brass construction
- · Black nickel finish
- T20 Torx® screws Gate Lock™ technology

VDB1







BLOCK

2-POSITION DISTRIBUTION

- (1) 1/0-4 AWG In
- (2) 4/8 AWG Out
- · TPE wrapped soft touch
- Dual-size gasket set
- · Water-resistant
- · Solid brass construction
- · Black nickel finish
- T20 Torx® screws Gate Lock™ technology

VDB2







BLOCK

4-POSITION DISTRIBUTION

- (1) 1/0-4 AWG In
- (4) 4/8 AWG Out
- · TPE wrapped soft touch
- Dual-size gasket set
- Water-resistant
- Solid brass construction
- · Black nickel finish
- T20 Torx® screws Gate Lock™ technology

VDB4







NEW!

BLOCK

BOLT DOWN GROUND BLOCK

- (2) 0/4 (2) 4/8 outputs
- TPE wrapped soft touch
- Dual sizes gasket set
- · Water-resistant
- Solid brass construction
- · Black nickel finish
- T20 Torx® screws
- Gate Lock technology
- Template included
- · Di-electric grease included







Mara

AT YOUR FINGERTIPS SUBSCRIBE!





- NEW PRODUCTS
- INSTRUCTION VIDEOS



www.facebook.com/MetraElectronics



www.twitter.com/MetraElectronic



www.youtube.com/user/MetraElectronics



www.instagram.com/MetraElectronics



Order Anytime Day or Night at www.MetraDealer.com



Download all our New Catalogs at www.MetraOnline.com



SOCIAL MEDIA

Follow US!

- FEATURED INSTALLS
- Q & A



SHARE YOUR PROJECT PHOTOS WITH US
FOR A CHANCE TO BE FEATURED ON OUR SOCIAL MEDIA.
TAG @METRAELECTRONICS IN YOUR POSTS!

PREMIUM BRASS ACCESSORIES

T-SPEC's premium brass accessories are engineered to simplify and streamline any installation with aesthetics that look as good as they perform. These ground breaking designs maximize functionality while maintaining the smallest footprint possible for installation into the tightest of spaces.

T-SPEC's revolutionary fuse block is the all-in-one solution, capable of mounting a single ANL fuse, single MANL fuse, or even dual MANL fuses. With a discrete footprint, the 3-way fused distribution block and 2-to-1 grounding block ensure a solid power transfer to all components for multiple amplifier systems. The 4-position battery terminal is the most versatile solution yet. It can accept up to (2) 1/0 AWG and (2) 4 AWG, down to (4) 10 AWG wires, and includes all of the markers and hardware that are used for a positive or negative post. T-SPEC is proud to use 100% brass for optimal conductivity with nickel plating for durability and longevity in all 4 of these premium components.





ANL

1/0 AWG COMPACT FUSE HOLDER

- Accepts single ANL or single/dual MANL fuses
- 1/0 AWG 8 AWG In/Out
- Compact design for simpler installation
- · Solid brass construction for maximum conductivity
- · Nickel finish for durability
- · Cover included

V-ANL-H



MANL

3-POSITION DISTRIBUTION BLOCK

- Independently MANL fused outputs
- (1) 1/0 AWG 8 AWG In
- (3) 4 AWG 10 AWG Out
- · Compact design for simpler installation
- · Solid brass construction for maximum conductivity
- · Nickel finish for durability
- · Cover included

V-DIST-PWR



GROUND

2-POSITION DISTRIBUTION

- (2) 4 AWG 10 AWG In
- (1) 1/0 AWG 8 AWG Out
- Compact design for simpler installation
- · Solid brass construction for maximum conductivity
- · Nickel finish for durability
- · Cover included

V-DIST-GND



POWER CAPACITORS

The strength of a vehicle's electrical system is often overlooked when upgrading your car's stereo system with power amplifiers and additional speakers. The truth is, these additions can provide additional stress on your alternator or battery resulting in diminished performance from the audio system. The simple addition of a T-SPEC capacitor will improve electrical system performance by providing a buffer between the alternator and amplifier. Stored energy from your car's electrical system is held in the cap and quickly released to the amplifier when needed. T-SPEC capacitors offer the lowest equivalent series resistance (E.S.R.) in the business allowing the cap to charge and release its energy quicker.











- Distribution top for easy installation
- Voltage meter to monitor electrical system performance
- Simple mounting system
- Impact-resistant polycarbonate cover

V8-3DDC



- Voltage meter to monitor electrical system performance
- Simple mounting system
- Impact-resistant polycarbonate cover

V6-1-5DDC

AMP KITS

In a "one size fits all" world it's rare to see a company provide a wide range of options. The team at T-SPEC understands how difficult it can be to find just the right product for your application. That's why the T-SPEC amp kit line features 17 different models to cover nearly every price, power and performance level imaginable! T-SPEC amp kits utilize the finest materials to ensure maximum performance and hassle-free installation.

POWERSPORTS & MARINE AMP KITS

More and more systems are being installed into boats and powersports vehicles like ATVs. These T-SPEC kits are designed specifically for that purpose. Each kit provides full CEA spec BC-5W2 marine compliant cable and circuit breaker protection to eliminate short circuits and will offer an easy re-set to get going again. No need to carry miscellaneous fuses in case of a problem.







- Exceeds CEA and ANSI specifications for wire gauge
- · Full virgin copper construction
- · High strand count for maximum flexibility
- BC-5W2 marine compliant RCA, speaker, power and ground wire
- Compact brass fusing and distribution



- 17' v12 1/O above AWG spec OFC matte red multi-strand power wire
- 3' v12 1/0 above AWG spec OFC matte black multi-strand ground wire
- 17' 18 AWG OFC blue remote turn-on wire
- 17' v12 noise-rejecting twisted RCA cable with precision-machined ends and quad split tip
- · Compact brass ANL fuse holder with 300A fuse
- Nickel-plated 1/0 AWG seamed crimp ring terminal with 8.5mm hole and silver boot connected at battery end and black boot connected at ground
- 1/0 AWG spade terminals with silver and black boots for amp connection
- Includes miscellaneous connectors, terminals and wire ties

V12-AK1





- 17' v12 4 above AWG spec OFC matte red multi-strand power wire
- 3' v12 4 above AWG spec OFC matte black multi-strand ground wire
- 17' 18 AWG OFC blue remote turn-on wire
- 17' v12 noise-rejecting twisted RCA cable with precision-machined ends and quad split tip
- · Compact brass MINI ANL fuse holder with 150A fuse
- · Nickel-plated 4 AWG seamed crimp ring terminal with 8.5mm hole and black boot connected at battery and black boot connected at ground
- · 4 AWG spade terminals with silver and black boots for amp connection
- · Includes miscellaneous connectors, terminals and wire ties

V12-AK4





- 17' v12 8 above AWG spec OFC matte red multi-strand power wire
- 3' v12 8 above AWG spec OFC matte black multi-strand ground wire
- · 17' 18 AWG OFC blue remote turn-on wire
- 17' v12 noise-rejecting twisted RCA cable with precision-machined ends and quad split tip
- Compact brass MINI ANL fuse holder with 60A fuse
- Nickel-plated 8 AWG seamed crimp ring terminal with 8.5mm hole and black boot connected at battery end and black boot connected at ground
- 4 AWG spade terminals with silver and black boots for amp connection
- · Includes miscellaneous connectors, terminals and wire ties

V12-AK8



v10 AMP KITS

- Meets CEA and ANSI specifications for wire gauge
- Full virgin copper construction
- · Fully tinned wire
- · High strand count for maximum flexibility
- BC-5W2 marine compliant RCA, speaker, power and ground wire
- · Compact brass fusing and distribution



- 17' v10 1/0 AWG fully tinned OFC pearl multi-strand power wire
- 3' v10 1/0 AWG fully tinned OFC black multi-strand ground wire
- 17' 18 AWG fully tinned OFC blue remote turn-on wire
- 17' v10 noise-rejecting dual-twist RCA cable with precision-machined ends and quad split tip
- Compact brass ANL fuse holder with 250A fuse
- Nickel-plated 1/0 AWG seamed crimp ring terminal with 8.5mm hole and silver boot connected at battery end and grey boot connected at ground
- 1/0 AWG spade terminals with silver and black boots for amp connection
- Includes miscellaneous connectors, terminals and wire ties

V10-AK1



SIVEL



- 17' v10 4 AWG fully tinned OFC pearl multi-strand power wire
- 3' v10 4 AWG fully tinned OFC black multi-strand ground wire
- 17' 18 AWG fully tinned OFC blue remote turn-on wire
- 17' v10 noise-rejecting dual-twist RCA cable with precision-machined ends and quad split tip
- Compact brass MANL fuse holder with 125A fuse
- Nickel-plated 1/O AWG seamed crimp ring terminal with 8.5mm hole and silver boot connected at battery end and grey boot connected at ground
- 4 AWG spade terminals with silver and black boots for amp connection
- Includes miscellaneous connectors, terminals and wire ties

V10-AK4





- 17' v10 8 AWG fully tinned OFC pearl multi-strand power wire
- 3' v10 8 AWG fully tinned OFC black multi-strand ground wire
- 17' 18 AWG fully tinned OFC blue remote turn-on wire
- 17' v10 noise-rejecting dual-twist RCA cable with precision-machined ends and quad split tip
- Compact brass MANL fuse holder with 50A fuse
- Nickel-plated 4 AWG seamed crimp ring terminal with 8.5mm hole and silver boot connected at battery end and grey boot connected at ground
- 8 AWG spade terminals with silver and black boots for amp connection
- Includes miscellaneous connectors, terminals and wire ties

V10-AK8





v8 AMP KITS

- v8GT power and ground wire
- · Full virgin copper construction
- · High strand count for maximum flexibility
- BC-5W2 marine compliant RCA, speaker, power and ground wire
- · Compact brass fusing and distribution



- 17' v8GT 1/0GA OFC red multi-strand power wire
- 3' v8GT 1/0GA OFC black multi-strand ground wire
- 17' 18 AWG OFC blue remote turn-on wire
- 17' v8 noise-rejecting twisted RCA cable with precision-molded ends and split tip
- · ANL fuse holder with 200A fuse
- Nickel-plated 1/O AWG seamed crimp ring terminal with 8.5mm hole and silver boot connected at battery end and black boot connected at ground
- 1/0 AWG spade terminals with silver and black boots for amp connection
- · Includes miscellaneous connectors, terminals and wire ties

V8-AK1





- 17' v8GT 4GA OFC red multi-strand power wire
- 3' v8GT 4GA OFC black multi-strand ground wire
- 17' 18 AWG OFC blue remote turn-on wire
- 17' v8 noise-rejecting twisted RCA cable with precision-molded ends and split tip
- · MINI ANL fuse holder with 100A fuse
- Nickel-plated 4 AWG seamed crimp ring terminal with 8.5mm hole and silver boot connected at battery end and black boot connected at ground
- · 4 AWG spade terminals with silver and black boots for amp connection
- · Includes miscellaneous connectors, terminals and wire ties

V8-AK4





- 17' v8GT 8GA OFC red multi-strand power wire
- 3' v8GT 8GA OFC black multi-strand ground wire
- 17' 18 AWG OFC blue remote turn-on wire
- 17' v8 noise-rejecting twisted RCA cable with precision-molded ends and split tip
- · MINI ANL fuse holder with 40A fuse
- Nickel-plated 8 AWG seamed crimp ring terminal with 8.5mm hole and silver boot connected at battery end and black boot connected at ground
- 8 AWG spade terminals with silver and black boots for amp connection
- Includes miscellaneous connectors, terminals and wire ties

V8-AK8



v6 AMP KITS

- · Meets CEA and ANSI specifications for wire gauge
- · Full virgin copper construction
- · High strand count for maximum flexibility
- BC-5W2 marine compliant RCA, speaker, power and ground wire
- Compact brass fusing and distribution



- 17' v6 1/0 AWG CCA multi-strand power wire
- 3' v6 1/0 AWG CCA multi-strand ground wire
- 17' 18 AWG CCA blue remote turn-on wire
- 17' v6 noise-rejecting woven coaxial RCA cable with precision-molded ends and split tip
- · ANL fuse holder with 150A fuse
- Nickel-plated 1/O AWG seamed crimp ring terminal with 8.5mm hole and red boot connected at battery end and black boot connected at ground
- 1/0 AWG spade terminals with red and black boots for amp connection
- Includes miscellaneous connectors, terminals and wire ties

V6-RAK1-0





- 17' v6 4 AWG CCA multi-strand power wire
- 3' v6 4 AWG CCA multi-strand ground wire
- 17' 18 AWG CCA blue remote turn-on wire
- 17' v6 noise-rejecting woven coaxial RCA cable with precision-molded ends and split tip
- · ANL fuse holder with 60A fuse
- Nickel-plated 4 AWG seamed crimp ring terminal with 8.5mm hole and red boot connected at battery end and black boot connected at ground
- 4 AWG spade terminals with red and black boots for amp connection
- Includes miscellaneous connectors, terminals and wire ties

V6-RAK4






- 17' v6 8 AWG CCA multi-strand power wire
- 3' v6 8 AWG CCA multi-strand ground wire
- 17' 18 AWG CCA blue remote turn-on wire
- 17' v6 noise-rejecting woven coaxial RCA cable with precision-molded ends and split tip
- · MINI ANL fuse holder with 30A fuse
- Nickel-plated 8 AWG seamed crimp ring terminal with 8.5mm hole and red boot connected at battery end and black boot connected at ground
- 8 AWG spade terminals with red and black boots for amp connection
- Includes miscellaneous connectors, terminals and wire ties

V6-RAK8



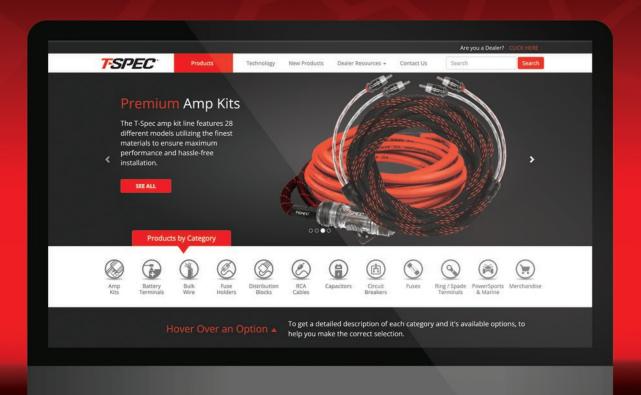

CHECK US OUT ONLINE AT TSPECONLINE.COM





4 GAUGE AMP KIT

SIDE-BY-SIDE WIRE

- · Red and yellow 4 AWG tinned side-by-side wire
- 4GA ring terminal with shrink tube + logo, pre-terminated on each end of red wire
- 4GA ring terminal with shrink tube and logo, pre-terminated on 8' red wire
- 4GA ring terminal with shrink tube and logo, pre-terminated on yellow wire
- 18' blue 18 AWG tinned remote turn-on wire
- 100 amp marine circuit breaker, IP67 rated, with stainless steel connection points for corrosion resistance and ignition protected

10'	3.05m	FULLY TINNED OFC	ML-AK4-10
20'	6.10m	FULLY TINNED OFC	ML-AK4-20



8 GAUGE AMP KIT

SIDE-BY-SIDE WIRE

- · Red and yellow 8 AWG tinned side-by-side wire
- 8GA ring terminal with shrink tube + logo, pre-terminated on each end of 2' red wire
- 8GA ring terminal with shrink tube and logo, pre-terminated on 8' red wire
- 8GA ring terminal with shrink tube and logo, pre-terminated on yellow wire
- 18' blue 18 AWG tinned remote turn-on wire
- 50 amp marine circuit breaker, IP67 rated, with stainless steel connection points for corrosion resistance and ignition protected

10'	3.05m	FULLY TINNED OFC	ML-AK8-10
20'	6.10m	FULLY TINNED OFC	ML-AK8-20





POWER + GROUND WIRE

4 GAUGE SIDE-BY-SIDE WIRE

- Red and yellow side-by-side
- · 4 AWG fully tinned OFC multi-strand power wire
- · High strand count for maximum flexibility
- BC-5W2 marine compliant
- 100' spool

ML-SPG4-100



POWER + GROUND WIRE

8 GAUGE SIDE-BY-SIDE WIRE

- Red and yellow side-by-side
- 8 AWG fully tinned OFC multi-strand power wire
- · High strand count for maximum flexibility
- BC-5W2 marine compliant
- 100' spool

ML-SPG8-100





BLUE PRIMARY WIRE

18 GAUGE TINNED

- · Blue primary wire
- 18 AWG fully tinned OFC multi-strand primary wire
- BC-5W2 marine compliant
- 500' spool

ML-BL18-500



v10 MARINE AMP KITS

- Designed specifically for amplifier installation in boats and powersports vehicles
- Each kit provides full CEA spec BC-5W2 marine compliant cable
- Each kit provides circuit breaker protection to eliminate short circuits
- · Offers easy reset to get going again
- · Fully tinned OFC wire
- No need to carry miscellaneous fuses in case of a problem

4 AWG AMP KIT

- · 4 AWG pearl white fully tinned OFC wire
- · 4 AWG black fully tinned OFC wire
- 20' blue fully tinned OFC
- (1) 100 amp circuit breaker
- (1) 4 AWG ring terminal with white boot
- (1) 4 AWG ring terminal with silver boot
- (10) 6" wire ties
- · Assorted accessories

20' 6.10m **FULLY TINNED OFC** V10-2041



POWER ACCESSORIES

T-Spec makes it easy to find just the right accessories for your power application. Constructed of quality materials to ensure maximum performance and endurance, this collection has products that can help power any type of audio system. Choose couplers, terminals, fuses, circuit breakers and more from a wide variety of capacity and style options. Black nickel finish, nickel-plating, corrosion-resistant elements and more make this line of products the best way to get the best results from any audio upgrade.







COUPLER 4 GAUGE NICKEL

- (1) 4GA In
- (1) 4GA Out
- T20 Torx® set screws
- Includes heat shrink cover
- · Black nickel finish
- Set of 2

VCP4



COUPLER

0/1 GAUGE NICKEL

- (1) 0/1GA In
- (1) 0/1GA Out
- T20 Torx® set screws
- Includes heat shrink cover
- · Black nickel finish
- Set of 2

VCPO



HEAVY-DUTY SET SCREW 2-PACK

1/0 AWG	VR04
4 AWG	VR48





RING TERM	IINALS	5-PACK	20-PACK
1/0 AWG	1/4" CRIMP	V8-RTN1	V8-RTN1-20
1/0 AWG	5/16" CRIMP	V8-RTN2	V8-RTN2-20
1/0 AWG	3/8" CRIMP	V8-RTN3	V8-RTN3-20
4 AWG	1/4" CRIMP	V8-RTN8	V8-RTN8-20
4 AWG	5/16" CRIMP	V8-RTN9	V8-RTN9-20
4 AWG	3/8" CRIMP	V8-RTN10	V8-RTN10-20
8 AWG	5/16" CRIMP	V8-RTN18	V8-RTN18-20
8 AWG	3/8" CRIMP	V8-RTN19	V8-RTN19-20
SPADE TERMINALS		5-PACK	20-PACK
4 AWG	1/4" CRIMP	V8-ST1	V8-ST1-20
8 AWG	1/4" CRIMP	V8-ST2	V8-ST2-20
8 AWG	#10 CRIMP	V8-ST3	V8-ST3-20







		2-PACK	10-PACK
80 AMP	ANL	V8-ANL80	V8-ANL80-10
100 AMP	ANL	V8-ANL100	V8-ANL100-10
150 AMP	ANL	V8-ANL150	V8-ANL150-10
200 AMP	ANL	V8-ANL200	V8-ANL200-10
250 AMP	ANL	V8-ANL250	V8-ANL250-10
300 AMP	ANL	V8-ANL300	V8-ANL300-10





		2-PACK	10-PACK
30 AMP	MANL	V8-MANL30	V8-MANL30-10
40 AMP	MANL	V8-MANL40	V8-MANL40-10
60 AMP	MANL	V8-MANL60	V8-MANL60-10
80 AMP	MANL	V8-MANL80	V8-MANL80-10
100 AMP	MANL	V8-MANL100	V8-MANL100-10
125 AMP	MANL	V8-MANL125	V8-MANL125-10
150 AMP	MANL	V8-MANL150	V8-MANL150-10









- 1/0 or 4 AWG In/Out
- Manual reset button
- Resistant to corrosion

V12-CBF200





- 1/0 or 4 AWG In/Out
- Manual reset button
- Resistant to corrosion

V12-CBF180





- 1/0 or 4 AWG In/Out
- Manual reset button
- · Resistant to corrosion

V12-CBF140





- 1/0 or 4 AWG In/Out
- · Manual reset button
- · Resistant to corrosion

V12-CBF100





T-SPEC SPOOL RACK DISPLAY

- Black powder-coated metal frame for high strength
- · Graphics included
- Holds up to 12 spools (not included)
- Can hold spool cable or speaker wire (not included)
- Dimensions: 57" H x 32" W x 28" D

SPOOLRACK-TSRP



T-SPEC WIRE SPOOL DISPLAY STAND

- Black powder-coated metal frame for high strength
- Metal frame for high strength
- Graphics included
- Holds 6 spools (not included)
- Dimensions: 66" H x 36" W

RT-SWSTAND



T-SPEC SLATWALL SPOOL HOLDER

- Black powder-coated metal
- Holds one spool (not included)
- · Mount on slatwall or sits on shelf / floor
- Dimensions: 12" H x 11.125" W x 11.75" D

TS-SLATSPOOL



T-SPEC SLATWALL HEADER

- High-quality printed logo graphic
- Lightweight rigid material
- Dimensions: 48"x8"

TSP-HDR



12" WIRE SAMPLE

- A variety of types and gauges
- Actual samples may vary

V8 - SAMPLE-V8

V10 - SAMPLE-V10

V12 - SAMPLE-V12





T-SPEC RCA **COUNTERTOP DISPLAY**

- High-quality printed display
- Sits on counter
- Dimensions: 11" H x 8.5" W x 3.5" D

TS-DISP-RCA



T-SPEC BANNER

- High-quality printed banner
- Includes reinforced holes for hanging
- Dimensions: 48"x24"

TSP-BANR



T-SPEC SHELF TALKER

· Call to action for your display

TSPEC-AMPSTKR



T-SPEC T-SHIRT

• Charcoal shirt with black/red screenprint on front & back

Large - TSP-SHRT13-L

X-Large - TSP-SHRT13-XL

XX-Large - TSP-SHRT13-XXL

T-SPEC LANYARD

TSPEC-LANYARD





T-SPEC XL DISPLAY

- Large, black powder-coated metal display
- Metal pegboard for strength
- Dimensions: 78" H X 39.5" W X 13.5" D

TSPECXL-COMBO

- PARTS:
- V10-AK4 x 2
- V10R10 x 2
- V10R14 x 2
- V10R17 x 2
- · VIORI/ X Z
- V10R174 x 2
- V10RY1 x 2
- V10RY2 x 2
- V12-AK4 x 2
- V12R10 x 2
- V12R14 x 2
- V12R17 x 2
- V12R174 x 2
- V12RY1 x 2

- V12RY2 x 2
- V16RCA-102 x 2
- V16RCA-172 x 2
- V16RCA-174 x 2
- V16RCA-32 x 2
- V16RCA-Y1 x 2
- V16RCA-Y2 x 2
- V8-3DCC
- V8-AK4 x 2
- V8-AK8 x 2
- V8R10 x 2
- VOICIO X 2
- V8R14 x 2
- V8R17 x 2V8R174 x 2

- V8RY1 x 2
- V8RY2 x 2
- VAGU x 2
- VANL x 2
- VANL X 2
- VANL1 x 2
- VBTPN x 2
- VDB2 x 2
- VFDB2 x 2
- VMANL x 2
- VMANL1 x 2
- VPNB4 x 2
- RACK750
- TSPECLARGE



T-SPEC STICKER

• 1.5" H x 6" W silver die-cut vinyl

TSP-STICKER

STICKER



T-SPEC OUT OF STOCK CARD

- Don't be left with empty shelves!
- 25 Pack

TSPEC-STKCD





T-SPEC SKINNY DISPLAY

- Black powder-coated metal
- · Metal pegboard for strength
- Dimensions each: 72" H x 20" W x 13.5" D

TSPECV8-RACK

- PARTS:
- V8-3DCC
- V8-AK4 x 2
- V8-AK8 x 2
- V8R10 x 2
- V8R14 x 2
- V8R17 x 2
- V8R174 x 2
- V8R3 x 2

- V8R6 x 2
- V8RY1 x 2
- V8RY2 x 2 • VAGU x 2
- VANL x 2
- VMANL x 2
- RACK700
- TSPECV8KIT

T-SPEC SKINNY DISPLAY

- · Black powder-coated metal
- · Metal pegboard for strength
- Dimensions each: 72" H x 20" W x 13.5" D

TSPECV10-RACK

- PARTS:
- V10-AK4 x 2
- V10RY2 x 2
- V10-AK8 x 2
- VANL x 2
- V10R10 x 2
- VANL1 x 2
- V10R14 x 2
- VBTPN x 2
- V10R17 x 2
- VMANL x 2 VMANL1 x 2
- V10R174 x 2 V10R3 x 2
- V10R6 x 2
- RACK700 TSPECV10KIT
- V10RY1 x 2

T-SPEC SKINNY DISPLAY

- · Black powder-coated metal
- Metal pegboard for strength
- Dimensions each: 72" H x 20" W x 13.5" D

TSPECV12-RACK

- PARTS:
- V12-AK4 x 2
- V12RY2 x 2
- V12-AK8 x 2 V12R10 x 2
- VBTPN x 2
- V12R14 x 2
- VBTPN x 2 VDB2 x 2
- V12R17 x 2
- VFDB2 x 2
- V12R174 x 2
- VPNB4 x 2
- V12R3 x 2
- V12R6 x 2
- RACK700
- TSPECV12KIT
- V12RY1 x 2

T-SPEC DISPLAY RACKS **BLANK RACKS ONLY**

• Dimensions: 78" H X 39.5" W X 13.5" D

Large DISPLAY - RACK750

Dimensions each: 72" H x 20" W x 13.5" D

Skinny DISPLAY - RACK700









T-SPEC DECALS

• 10 3/4" W x 13" H T-SPEC small top decal & v8 decal

TSPECV8KIT

• 10 3/4" W x 13" H T-SPEC small top decal & v10 decal

TSPECV10KIT

• 10 3/4" W x 13" H T-SPEC small top decal & v12 decal

TSPECV12KIT

• 15 1/2" W x 4" H T-SPEC large top decal

TSPECLARGE

'ERMS & CONDITIONS

TERMS

Net 30 days from date of invoice on approved accounts. Minimum order: \$50 per invoice, orders less than required minimum incur a \$20 service charge.

FREIGHT

Freight on board (F.O.B.) from point of shipment. Freight will be charged on all drop-shipment orders.

CREDIT

In order to establish a credit line with Metra, an application for credit must be submitted listing a minimum of five (5) trade references and a bank with their addresses and phone numbers and must be signed by a principal or authorized officer of the company. A credit line will be established by our credit

manager and must be maintained in a current status according to our terms (net 30 days). Credit not established or revoked requires remittance with order. Returned checks are subject to a fee of \$32.00.

RESALE TAX EXEMPTION CERTIFICATE

CA, TX, KY, NJ & FL customers must provide a valid resale card before an order can be placed.

CLAIMS

Title and risk of loss passes to buyer at F.O.B. shipping point and all claims must be filed with carrier. Any discrepancies must be reported to Metra within ten (10) days of receipt of shipment.

RETURNS

All sales are final. No returns or exchanges will be allowed without prior written authorization from Metra. All returns are subject to a 20% handling charge, must be in a salable condition and must have been purchased within sixty (60) days of return request. No stock balancing permitted. Copies of invoices must be mailed in advance for any return authorization (R.A.).

LIMITED WARRANTY

Metra warrants all of its products to be free from defects in material and workmanship for a period of 1 Year from date of shipment. Metra will, at its option, repair, replace, or allow credit on any part which, in Metra's opinion, is

found defective under normal use. Warranty void on any items misused, altered in any way, tampered with or serviced by anyone other than Metra Electronics. This warranty of merchantability of fitness neither assumes or authorizes any other person to assume for it, any other liability in connection with its products. In no event shall we be liable for any incidental or consequential damages, or do we assume any other liability for any incidental or consequential damages, or do we assume any other liability except provided herein.

Metra Electronics® warrants this product only to the original purchaser.

BACK ORDERS

If an item is temporarily unavailable for immediate shipment, we will backorder the item & ship as soon as possible from the nearest available warehouse, unless otherwise instructed. Metra reserves the right to make changes in or deletions of products or prices without prior notice.

*Metra will not assume any responsibility for damages to person or property due to incorrect interpretation of the material in this publication. Metra is not responsible for typographical or printing errors. Reproductions of editorial or pictorial content is strictly prohibited without prior consent from Metra.

WARNING: This catalog does not advise whether a State of California Proposition 65 warning is required for a particular item of merchandise. To learn whether a particular item of merchandise requires a California Proposition 65 warning, please be sure to look up and read the particular merchandise's listing on Metra's website www.MetraOnline.com, as well as read the particular merchandise's packaging. When a California Proposition 65 warning is present on Metra's website listing for the particular merchandise, or on the particular merchandise's packaging, a compliant California Proposition 65 warning is to be provided to the purchasing California consumer prior to the sale of the particular merchandise.













youtube.com/MetraElectronics



Order Anytime Day or Night at MetraDealer.com



Download all our New Catalogs at MetraOnline.com



MetraOnline.com MetraDealer.com

ORDERS: 386.257.2956

CORPORATE HEADQUARTERS

Metra Electronics Corporation 460 Walker Street Holly Hill, FL 32117-2699

Metra Corporate: 386.25

Metra 12volt & International Sales: 386.257.2956

Sales Fax: 386.258.3940