


# DETACHABLE ACTIVE OPTICAL FIBER HDMI® CABLES

ethereal

CELEBRATING  
**75**  
YEARS

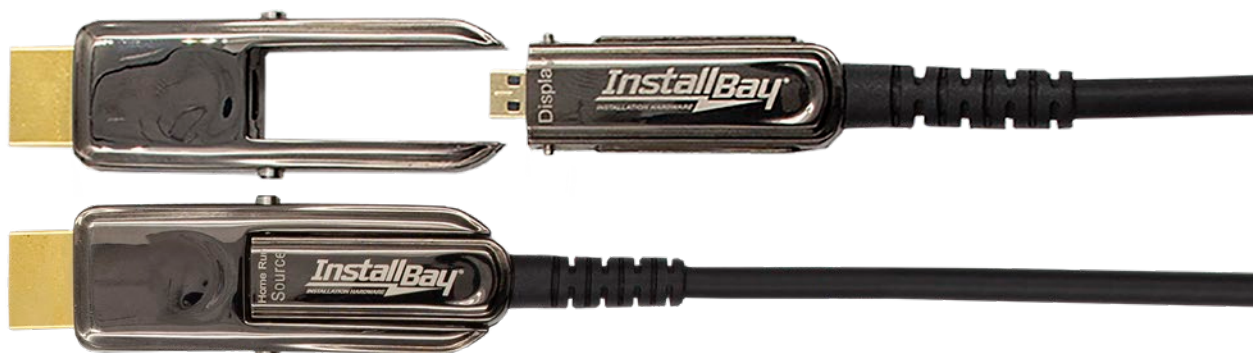

**48**  
GBPS

4x12 GBPS

**8K**  
60Hz HDR

RESOLUTION

**24K**  
GOLD PLATED

CONNECTOR

**FRL**  
**VRR**

SUPPORTED

HDMI®  
HIGH SPEED  
with ETHERNET

**InstallBay**  
INSTALLATION HARDWARE

## DETACHABLE ACTIVE OPTICAL FIBER HDMI®



SALES 386-255-0234

### FIBER CL3

| POLY BAG                     | LENGTH |     |
|------------------------------|--------|-----|
| 48Gbps HDMI® AOC + CL3 RATED |        |     |
| <b>IB-HDA2D-015</b>          | 15FT   | ARC |
| <b>IB-HDA2D-030</b>          | 30FT   | ARC |
| <b>IB-HDA2D-040</b>          | 40FT   | ARC |
| <b>IB-HDA2D-050</b>          | 50FT   | ARC |
| <b>IB-HDA2D-065</b>          | 65FT   | ARC |
| <b>IB-HDA2D-080</b>          | 80FT   | ARC |
| <b>IB-HDA2D-100</b>          | 100FT  | ARC |
| <b>IB-HDA2D-130</b>          | 130FT  |     |
| <b>IB-HDA2D-160</b>          | 160FT  |     |
| <b>IB-HDA2D-200</b>          | 200FT  |     |
| <b>IB-HDA2D-260</b>          | 260FT  |     |

### PRODUCT OVERVIEW

These installer-friendly HDMI cables with Ethernet have a removable headshell with a small connector cover and hook that makes pulling the cable through conduit easy! The hybrid active optical fiber technology supports up to 48Gbps (4x12Gbps) bandwidth for 8K@60Hz, 4K@120Hz, and Dynamic HDR with no external power required. The thin cable diameter and 24K gold plated connector offer beauty and performance for an unbeatable value. Compatible with audio return channel (ARC) up to 100 feet and HDMI 2.1 devices. The durable CL3 jacket is designed for in-wall installation and is a home builder's top choice for pre-wiring new homes thanks to their UL-rated jacket that does not split or break in colder temperatures\*. Available in lengths from 15 to 260 feet.

- 48Gbps (4x12Gbps) speed performance
- Supports 8K@60Hz, 4K@120Hz, Dynamic HDR
- HDMI 2.1 devices supported
- 24K gold plated connector
- No external power required
- Detachable head shell reveals small connector easy for pulling through conduit
- Includes connector cover with hook for pulling through conduit
- Durable CL3 jacket for in wall installations
- Audio return channel (ARC) up to 100 feet
- FRL (Fixed Rate Link) & VRR (Variable Refresh Rate) supported
- \*Operating temperature -10-50 °C / 14 - 122 °F
- \*Storage temperature -20-60 °C / -4 - 140 °F

