


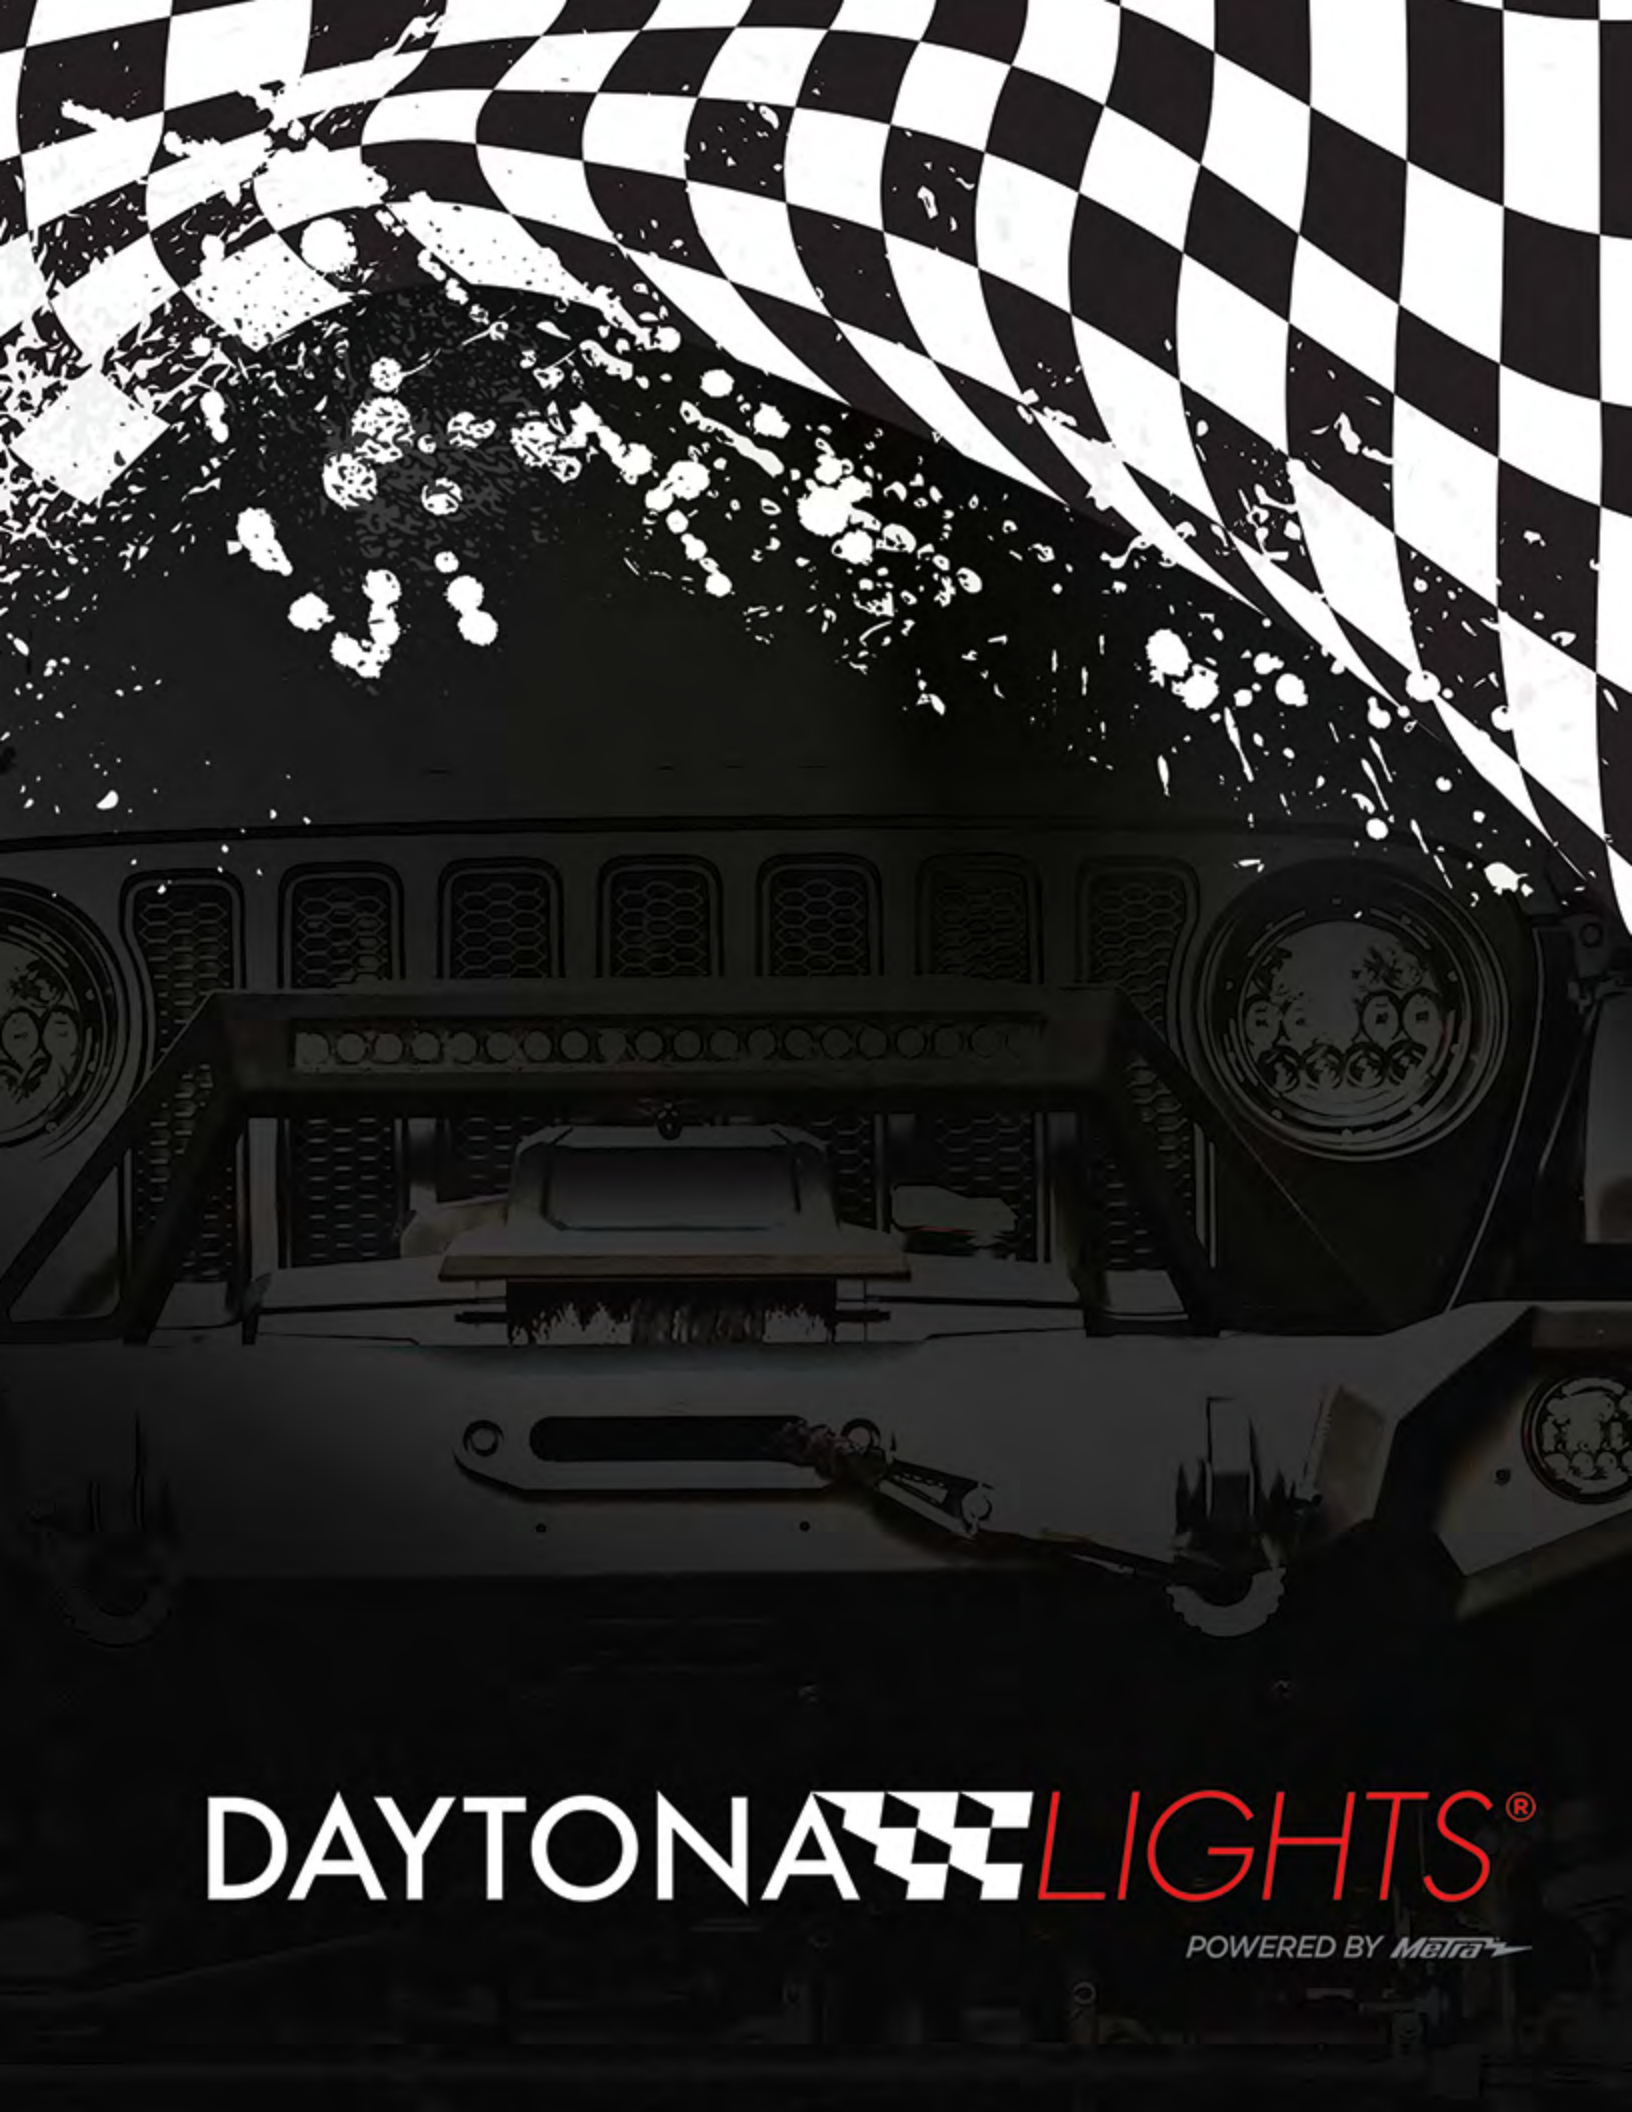

DAYTONA  LIGHTS®

POWERED BY *Metra* 

INTRODUCING

OUR NEW DIGITAL INTERACTIVE CATALOGS!

With the rapid growth of today’s digital technology and the need for adaptive accessibility, we have stepped up our efforts in getting our customers all of the product information they need right at their fingertips. Our new digital interactive catalogs provide the convenience of simple one-click navigation options along with product interactions that include additional product photos, videos, technical information and even links to view or order the product online. Watch the quick video, below, to see all of the cool new features our digital interactive catalogs offer or you can dive right in to using this catalog with the provided interactive guide.

 Click here to watch a quick video on how to navigate this digital interactive catalog

INTERACTIVE GUIDE
CLICK A CATEGORY BELOW TO VIEW THE GUIDE

NAVIGATION

PRODUCTS

ONLINE

MANUFACTURED EXCLUSIVELY BY METRA ELECTRONICS®

Light your ride without breaking the bank. Whether it’s for style or function, Daytona Lights® by Metra Electronics® lets you add LED lighting upgrades at an incredible value. This series is engineered and manufactured to meet all international standards, with advanced thermal management, short circuit, and open circuit protection, and many other innovative features to repel moisture and extend the overall life of the product.

All of these lights are rated IP66 or better and undergo rigorous testing during the development and manufacturing process and once again before leaving the factory. Metra’s 75+ year history, experience, and approach to engineering and manufacturing ensures that all of these products stand out among competitors to provide affordable, quality lighting.

 **NOT FOR USE ON PUBLIC ROADS**

Auxiliary driving and fog lights are intended for use solely as auxiliary lighting. They are not intended to be used for headlight purposes, nor are they certified for headlight usage. Auxiliary lights are designed to improve visibility during night time driving and inclement weather. Irresponsible use of any auxiliary light can be dangerous and illegal. Auxiliary driving lights are intended to supplement the high-beam of a standard headlamp system. They are not intended for use alone or with the low-beam of a standard headlamp system. Lighting laws vary from state to state.

 **WARNING:** This catalog does not advise whether a State of California Proposition 65 warning is required for a particular item of merchandise. To learn whether a particular item of merchandise requires a California Proposition 65 warning, please be sure to look up and read the particular merchandise’s listing on Metra’s website www.MetraOnline.com, as well as read the particular merchandise’s packaging. When a California Proposition 65 warning is present on Metra’s website listing for the particular merchandise, or on the particular merchandise’s packaging, a compliant California Proposition 65 warning is to be provided to the purchasing California consumer prior to the sale of the particular merchandise.

TABLE OF CONTENTS

LIGHTBARS	
ULTRA SLIM	4
SINGLE ROW CURVED	5
DUAL ROW	5-6
DUAL ROW CURVED	7
BLACKOUT DUAL ROW	8
BLACKOUT DUAL ROW CURVED	9

CUBE LIGHTS	
4” DUAL ROW / 5D SPOT / 140° DUAL ZONE	10
2.5” 1 LED / 3” 4 LED	11-12
3” 6 LED	12
FLUSH MOUNT 3.6” 4 LED / 3.6” 6 LED	13

DRIVING LIGHTS	
FLUSH MOUNT 6 LED	13
TRADITIONAL 20 LED / SQUARE 9 LED / ROUND 9 LED	14

ACCENT LIGHTS	
SINGLE COLOR EZ LIGHTS	15
SINGLE COLOR ROCK LIGHTS	15
RGB ROCK LIGHT KITS	15
RGB STRIP LIGHT KITS & ACCESSORIES	16

LED BULBS	
SINGLE & DUAL BEAM BULBS	17
CANBUS DECODERS	17

LIGHTBARS • ULTRASLIM

DL-US725 7.25 INCH 6 LED

Wattage: 18W • Raw Lumens: 1080lm
Current Consumption @13.8V: 1.3A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-US135 13.5 INCH 12 LED

Wattage: 36W • Raw Lumens: 2160lm
Current Consumption @13.8V: 2.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-US195 19.5 INCH 18 LED

Wattage: 54W • Raw Lumens: 3240lm
Current Consumption @13.8V: 3.9A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: 8° Spot


[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-US4425 44.25 INCH 42 LED

Wattage: 126W • Raw Lumens: 7560lm
Current Consumption @13.8V: 9.2A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com

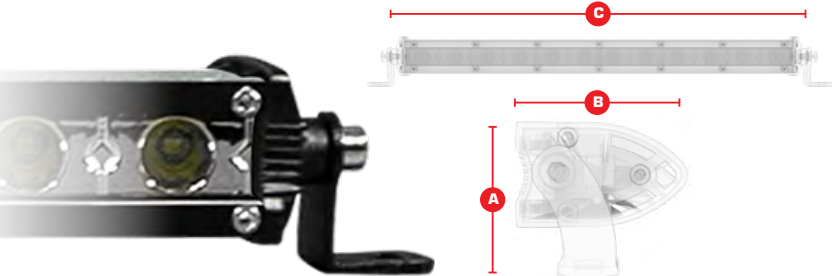

PART NUMBER	BAR DIMENSIONS		
	Height (A)	Depth (B)	Length (C)
DL-US725	1.0625"	1.75"	7.25"
DL-US135	1.0625"	1.75"	13.5"
DL-US195	1.0625"	1.75"	19.5"
DL-US4425	1.0625"	1.75"	44.25"

COMMON FEATURES


Housing Material: Aluminum: Extruded body, with die-cast caps • **Color:** Black
Lens Material: Polycarbonate • **Hardware:** Stainless steel • **Electronics:** Integrated-epoxy encapsulated
Operating Temperature: -40° F to 140° F • **Protection:** Reverse polarity

LIGHTBARS • CURVED • SINGLE ROW

DL-SRC30 30 INCH 14 LED

Wattage: 140W • Raw Lumens: 8315lm
Current Consumption @13.8V: 10.1A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com

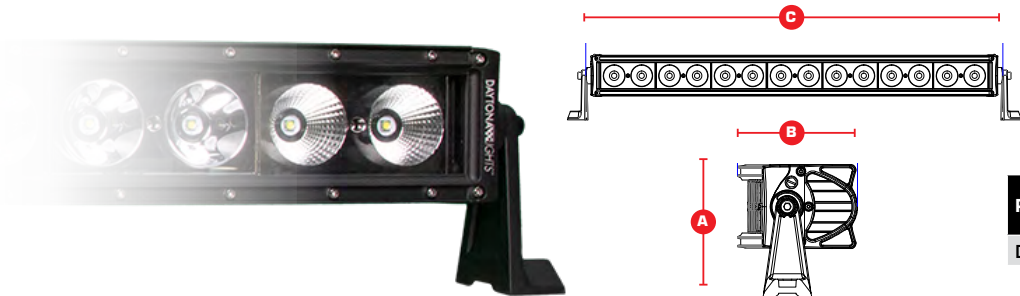

PART NUMBER	BAR DIMENSIONS (includes bracket)		
	Height (A)	Depth (B)	Length (C)
DL-SRC30	4.75"	4.25"	30.46"



LIGHTBARS • DUAL ROW

DL-DR8 8 INCH 12 LED

Wattage: 36W • Raw Lumens: 2160lm
Current Consumption @13.8V: 2.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-DR14 14 INCH 24 LED

Wattage: 72W • Raw Lumens: 4320lm
Current Consumption @13.8V: 5.2A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot°

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



* Images in this catalog are not shown to scale

* Images in this catalog are not shown to scale

LIGHTBARS • DUALROW

DL-DR42 42 INCH 80 LED

Wattage: 240W • Raw Lumens: 14400lm
Current Consumption @13.8V: 17.4A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot


[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-DR52 52 INCH 100 LED

Wattage: 300W • Raw Lumens: 18000lm
Current Consumption @13.8V: 21.8A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com

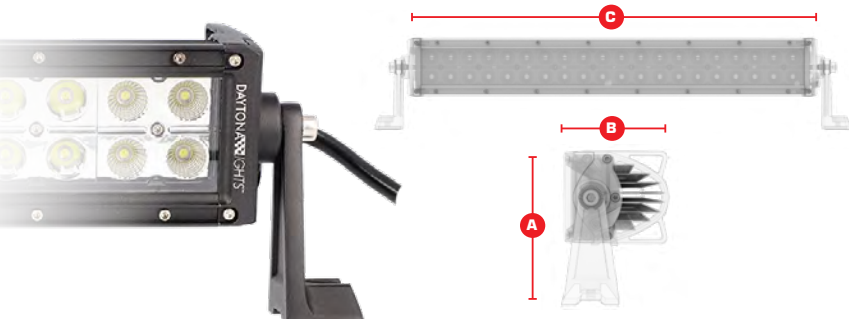

PART NUMBER	BAR DIMENSIONS		
	Height (A)	Depth (B)	Length (C)
DL-DR8	3.0625"	3.4375"	8"
DL-DR14	3.0625"	3.4375"	14"
DL-DR42	3.0625"	3.4375"	42"
DL-DR52	3.0625"	3.4375"	52"

COMMON FEATURES

Housing Material: Aluminum: Extruded body, with die-cast caps • **Color:** Black
Membrane: Military breather • **Lens Material:** Polycarbonate • **Electronics:** Integrated-epoxy encapsulated
Hardware: Stainless steel **Operating Temperature:** -40° F to 140° F • **Protection:** Reverse polarity



LIGHTBARS • CURVED • DUALROW

DL-DRC22 22 INCH 40 LED

Wattage: 120W • Raw Lumens: 7200lm
Current Consumption @13.8V: 8.7A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-DRC32 32 INCH 60 LED

Wattage: 180W • Raw Lumens: 10800lm
Current Consumption @13.8V: 12.1A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-DRC42 42 INCH 80 LED

Wattage: 240W • Raw Lumens: 14400lm
Current Consumption @13.8V: 17.4A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-DRC50 50 INCH 96 LED

Wattage: 288W • Raw Lumens: 17280lm
Current Consumption @13.8V: 20.9A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-DRC52 52 INCH 100 LED

Wattage: 300W • Raw Lumens: 18000lm
Current Consumption @13.8V: 21.7A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot


[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com



DL-DRC54 54 INCH 104 LED

Wattage: 312W • Raw Lumens: 18720lm
Current Consumption @13.8V: 22.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com

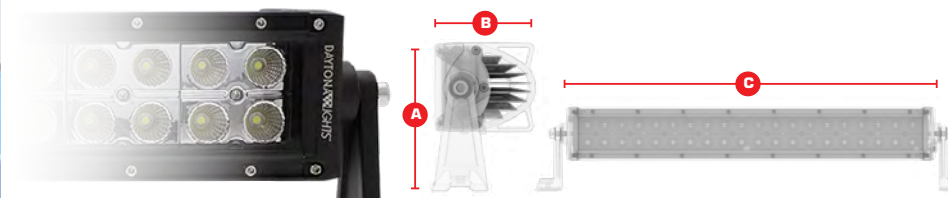

PART NUMBER	BAR DIMENSIONS		
	Height (A)	Depth (B)	Length (C)
DL-DRC22	3.0625"	3.4375"	22"
DL-DRC32	3.0625"	3.4375"	32"
DL-DRC42	3.0625"	3.4375"	42"
DL-DRC50	3.0625"	3.4375"	50"
DL-DRC52	3.0625"	3.4375"	52"
DL-DRC54	3.0625"	3.4375"	54"

COMMON FEATURES

Housing Material: Aluminum: Extruded body, with die-cast caps • **Color:** Black
Membrane: Military breather • **Lens Material:** Polycarbonate • **Electronics:** Integrated-epoxy encapsulated
Hardware: Stainless steel • **Operating Temperature:** -40° F to 140° F • **Protection:** Reverse polarity

DL-BDR8 8 INCH 12 LED

Wattage: 36W • Raw Lumens: 2160lm
Current Consumption @13.8V: 2.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDR14 14 INCH 24 LED

Wattage: 72W • Raw Lumens: 4320lm
Current Consumption @13.8V: 5.2A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDR22 22 INCH 40 LED

Wattage: 120W • Raw Lumens: 7200lm
Current Consumption @13.8V: 8.7A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDR32 32 INCH 60 LED

Wattage: 180W • Raw Lumens: 10800lm
Current Consumption @13.8V: 13.1A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDR42 42 INCH 80 LED

Wattage: 240W • Raw Lumens: 14400lm
Current Consumption @13.8V: 17.4A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot


[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDR50 50 INCH 96 LED

Wattage: 288W • Raw Lumens: 17280lm
Current Consumption @13.8V: 20.9A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com

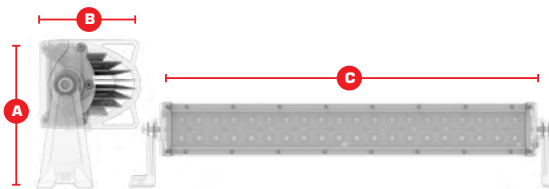

PART NUMBER	BAR DIMENSIONS		
	Height (A)	Depth (B)	Length (C)
DL-BDR8	3.0625"	3.4375"	8"
DL-BDR14	3.0625"	3.4375"	14"
DL-BDR22	3.0625"	3.4375"	22"
DL-BDR32	3.0625"	3.4375"	32"
DL-BDR42	3.0625"	3.4375"	42"
DL-BDR50	3.0625"	3.4375"	50"

COMMON FEATURES

Housing Material: Aluminum: Extruded body, with die-cast caps • Color: Black
Membrane: Military breather • Lens Material: Polycarbonate • Electronics: Integrated-epoxy encapsulated
Hardware: Stainless steel • Operating Temperature: -40° F to 140° F • Protection: Reverse polarity

DL-BDRC22 22 INCH 40 LED

Wattage: 120W • Raw Lumens: 7200lm
Current Consumption @13.8V: 8.7A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDRC32 32 INCH 60 LED

Wattage: 180W • Raw Lumens: 10800lm
Current Consumption @13.8V: 12.1A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDRC42 42 INCH 80 LED

Wattage: 240W • Raw Lumens: 14400lm
Current Consumption @13.8V: 17.4A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDRC52 52 INCH 100 LED

Wattage: 300W • Raw Lumens: 18000lm
Current Consumption @13.8V: 21.7A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot


[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com



DL-BDRC54 54 INCH 104 LED

Wattage: 312W • Raw Lumens: 18720lm
Current Consumption @13.8V: 22.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Combo - 90° Flood & 8° Spot

[VIEW PRODUCT](#) - MetraOnline.com / [PURCHASE NOW](#) - MetraDealer.com

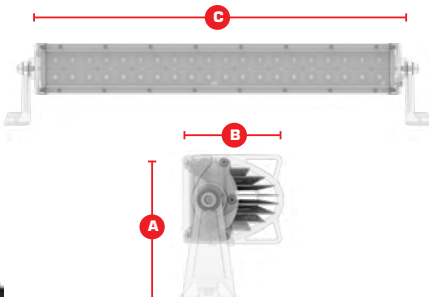

PART NUMBER	BAR DIMENSIONS		
	Height (A)	Depth (B)	Length (C)
DL-BDRC22	3.0625"	3.4375"	22"
DL-BDRC32	3.0625"	3.4375"	32"
DL-BDRC42	3.0625"	3.4375"	42"
DL-BDRC52	3.0625"	3.4375"	52"
DL-BDRC54	3.0625"	3.4375"	54"

COMMON FEATURES

Housing Material: Aluminum: Extruded body, with die-cast caps • Color: Black
Membrane: Military breather • Lens Material: Polycarbonate • Electronics: Integrated-epoxy encapsulated
Hardware: Stainless steel • Operating Temperature: -40° F to 140° F • Protection: Reverse polarity

DL-CL1

4 INCH

6 LED

Wattage*: 36W • Raw Lumens*: 2520lm

Current Consumption* @13.8V: 2.6A • IP Rating: IP67

Input Voltage: 10-30V DC • Color Temperature: 6000K

Beam Pattern: 90° Flood

*Total value for set of two lights

[VIEW PRODUCT - MetraOnline.com](#) [PURCHASE NOW - MetraDealer.com](#)



DL-CL3

140° DUAL ZONE

12 LED

Separate power wires for spot LEDs and flood LEDs

Wattage*: 72W • Raw Lumens*: 2520lm

Current Consumption* @13.8V: 5.2A • IP Rating: IP67


Input Voltage: 10-30V DC • Color Temperature: 6000K

Beam Pattern: Combo (Spot & Flood)

*Total value for set of two lights

[VIEW PRODUCT - MetraOnline.com](#) [PURCHASE NOW - MetraDealer.com](#)



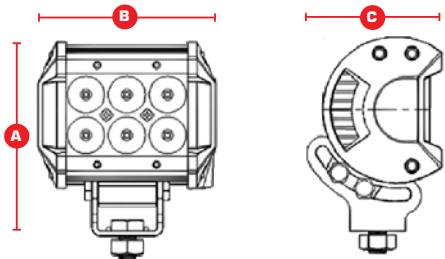

PART NUMBER	CUBE DIMENSIONS (includes bracket)		
	Height (A)	Width (B)	Depth (C)
DL-CL1	4"	4"	2.75"
DL-CL3	4.5"	3.2"	3.9"

COMMON FEATURES

Housing Material: Die-cast aluminum • Color: Black • Lens Material: Polycarbonate

Hardware: Stainless steel • Electronics: Integrated-epoxy encapsulated

Operating Temperature: -40° F to 140° F • Protection: Reverse polarity

DL-CL4

2.5 INCH

1 LED

Wattage*: 20W • Raw Lumens*: 1800lm

Current Consumption @13.8V*: 1.44A • IP Rating: IP67


Input Voltage: 10-30V DC • Color Temperature: 6000K

Beam Pattern: Flood

*Total value for set of two lights

[VIEW PRODUCT - MetraOnline.com](#) [PURCHASE NOW - MetraDealer.com](#)



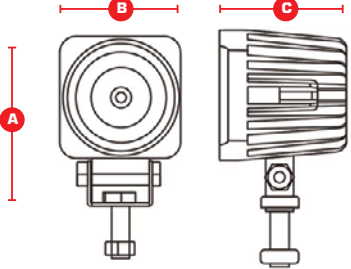

PART NUMBER	CUBE DIMENSIONS (includes bracket)		
	Height (A)	Width (B)	Depth (C)
DL-CL4	2.6"	2.6"	2.6"

DL-CL5S

3 INCH

4 LED

Wattage*: 32W • Raw Lumens*: 2880lm

Current Consumption* @13.8V*: 2.32A • IP Rating: IP67

Input Voltage: 10-30V DC • Color Temperature: 6000K

Beam Pattern: Spot

*Total value for set of two lights

[VIEW PRODUCT - MetraOnline.com](#) [PURCHASE NOW - MetraDealer.com](#)



DL-CL5F

3 INCH

4 LED

Wattage*: 32W • Raw Lumens*: 2880lm

Current Consumption* @13.8V*: 2.32A • IP Rating: IP67

Input Voltage: 10-30V DC • Color Temperature: 6000K

Beam Pattern: Flood

*Total value for set of two lights

[VIEW PRODUCT - MetraOnline.com](#) [PURCHASE NOW - MetraDealer.com](#)



DL-CL6S

3 INCH

4 LED

Wattage*: 32W • Raw Lumens*: 2880lm

Current Consumption* @13.8V*: 2.32A • IP Rating: IP67

Input Voltage: 10-30V DC • Color Temperature: 6000K

Beam Pattern: Spot

*Total value for set of two lights

[VIEW PRODUCT - MetraOnline.com](#) [PURCHASE NOW - MetraDealer.com](#)




* Images in this catalog are not shown to scale

CUBE LIGHTS

DL-CL6F 3 INCH 4 LED

Wattage*: 32W • Raw Lumens*: 2880lm
Current Consumption* @13.8V*: 2.32A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Flood
*Total value for set of two lights

VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

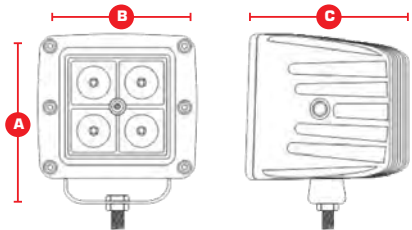

PART NUMBER	CUBE DIMENSIONS (includes bracket)		
	Height (A)	Width (B)	Depth (C)
DL-CL5S	3"	3.2"	3.1"
DL-CL5F	3"	3.2"	3.1"
DL-CL6S	3"	3.2"	3.1"
DL-CL6F	3"	3.2"	3.1"



DL-CL7S 3 INCH 6 LED

Wattage*: 36W • Raw Lumens*: 3240lm
Current Consumption* @13.8V*: 2.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Spot
*Total value for set of two lights


VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com



DL-CL7F 3 INCH 6 LED

Wattage*: 36W • Raw Lumens*: 3240lm
Current Consumption* @13.8V*: 2.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Flood
*Total value for set of two lights

VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

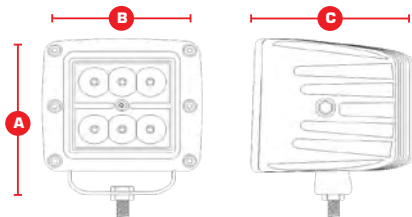

PART NUMBER	CUBE DIMENSIONS (includes bracket)		
	Height (A)	Width (B)	Depth (C)
DL-CL7S	3"	3.2"	3.1"
DL-CL7F	3"	3.2"	3.1"



COMMON FEATURES


Housing Material: Die-cast aluminum • Color: Black • Lens Material: Polycarbonate
Hardware: Aluminum • Electronics: Integrated-epoxy encapsulated
Operating Temperature: -40° F to 140° F • Protection: Reverse polarity

CUBE LIGHTS • FLUSHMOUNT

DL-FMCL5 3.6 INCH 4 LED

Wattage*: 32W • Raw Lumens*: 2880lm
Current Consumption* @13.8V*: 2.32A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Flood
*Total value for set of two lights

VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

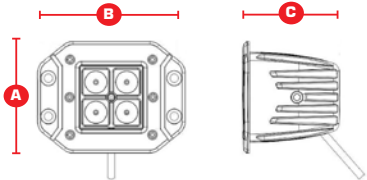


PART NUMBER	CUBE DIMENSIONS		
	Height (A)	Width (B)	Depth (C)
DL-FMCL5	3.6"	4.8"	3.1"



DL-FMCL7 3.6 INCH 6 LED

Wattage*: 36W • Raw Lumens*: 3240lm
Current Consumption* @13.8V*: 2.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6000K
Beam Pattern: Spot
*Total value for set of two lights

VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

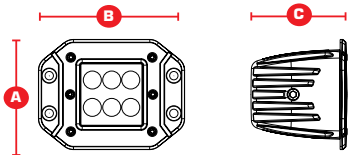

PART NUMBER	CUBE DIMENSIONS		
	Height (A)	Width (B)	Depth (C)
DL-FMCL7	3.6"	4.8"	3.1"



COMMON FEATURES


Housing Material: Die-cast aluminum • Color: Black • Lens Material: Polycarbonate
Hardware: Aluminum • Electronics: Integrated-epoxy encapsulated
Operating Temperature: -40° F to 140° F • Protection: Reverse polarity

DRIVING LIGHTS

DL-FMDL1 FLUSH MOUNT 6 LED

Wattage*: 36W • Raw Lumens*: 3240lm
Current Consumption* @13.8V*: 2.6A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6500K
Beam Pattern: Spot
*Total value for set of two lights

VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

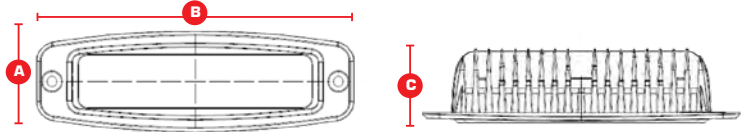

PART NUMBER	LIGHT DIMENSIONS		
	Height (A)	Width (B)	Depth (C)
DL-FMDL1	2.4"	7.7"	1.8"



FEATURES

Housing Material: Die-cast aluminum • Color: Black • Lens Material: Polycarbonate
Hardware: Aluminum • Electronics: Integrated-epoxy encapsulated
Operating Temperature: -40° F to 140° F • Protection: Reverse polarity


DRIVING LIGHTS

Click here to watch a video on these products!

DL-DL1 TRADITIONAL 20 LED

Wattage*: 40W • Raw Lumens*: 2880lm
Current Consumption* @13.8V: 2.9A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6500K
Beam Pattern: 10° Spot
*Total value for set of two lights

VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

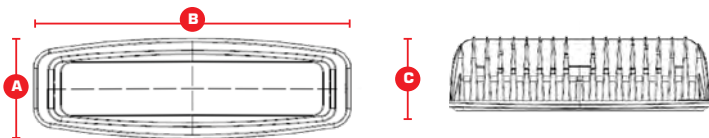


PART NUMBER	LIGHT DIMENSIONS		
	Height (A)	Width (B)	Depth (C)
DL-DL1	1.9"	6.3"	2.5"

DL-DL4S SQUARE 9 LED

Wattage*: 54W • Raw Lumens*: 3510lm
Current Consumption* @13.8V: 3.4A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6500K
Beam Pattern: 60° Flood
*Total value for set of two lights

VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

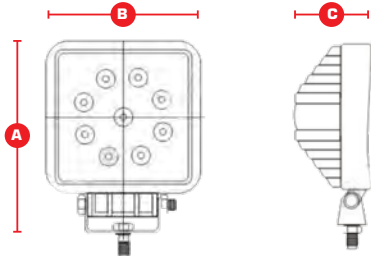


PART NUMBER	LIGHT DIMENSIONS (includes bracket)		
	Height (A)	Width (B)	Depth (C)
DL-DL4S	5.0"	4.3"	2.2"

DL-DL4R ROUND 9 LED

Wattage*: 54W • Raw Lumens*: 3510lm
Current Consumption* @13.8V: 3.4A • IP Rating: IP67
Input Voltage: 10-30V DC • Color Temperature: 6500K
Beam Pattern: 60° Flood
*Total value for set of two lights

VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

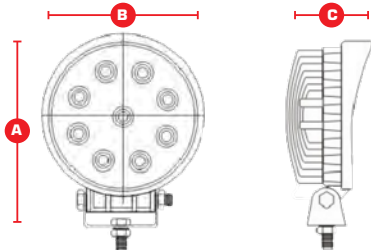

PART NUMBER	LIGHT DIMENSIONS (includes bracket)		
	Height (A)	Width (B)	Depth (C)
DL-DL4R	5.0"	4.3"	2.2"

COMMON FEATURES

Housing Material: Die-cast aluminum • Color: Black • Lens Material: Polycarbonate
Hardware: Stainless steel • Electronics: Integrated-epoxy encapsulated
Operating Temperature: -40° F to 140° F • Protection: Reverse polarity

ACCENT LIGHTS

EZ ACCENT LIGHTS SINGLE COLOR 2 PACK VIEW PRODUCT - MetraOnline.com PURCHASE NOW - MetraDealer.com

- Soft glow interior accent lights
- USB powered
- Pack of 2 lights



DL-EZAW WHITE



DL-EZAR RED



DL-EZAG GREEN



DL-EZAB BLUE

ROCK LIGHTS 3.6 WATT 2 PACK

LEDs*: (3) 2525 LEDs • Wattage*: 3.6W
Connection: 4" Hardwire Leads • IP Rating: IP67
Mounting: Flat and Curved Bases Included
Hardware: Included • Package: (2) Lights
*Total value for one light

VIEW PRODUCT - MetraOnline.com

PURCHASE NOW - MetraDealer.com



DL-ROCKW WHITE



DL-ROCKR RED



DL-ROCKG GREEN



DL-ROCKB BLUE

RGB ROCK LIGHT KITS APP CONTROLLED RGB LEDS

DL-RGB4KT

- 4 rock lights

VIEW PRODUCT - MetraOnline.com

PURCHASE NOW - MetraDealer.com

DL-RGB8KT

- 8 rock lights

VIEW PRODUCT - MetraOnline.com


PURCHASE NOW - MetraDealer.com

RGB ROCK LIGHT KITS INCLUDE:

- 1 app controlled RGB controller
- Easy install two-wire hookup
- Water-resistant connectors
- Mounting hardware

DOWNLOAD THE FREE RGB APP!

- Manage Groups
- Set Schedules
- Modify Colors
- Modify Pin Sequences
- Sync Music
- Microphone Function

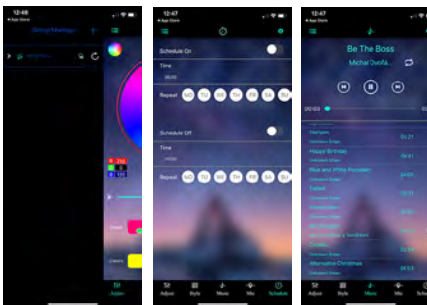

* Images in this catalog are not shown to scale

RGB LED KITS



Click here to watch a video on these products!

RGB LED STRIP KITS 2 REMOTE TYPES

- Extension wires and splitters included
- Control one or multiple DL-RGBK(x) kits with included card remote or key fob
- IP65 LED Strips
- Easy installation with all plug-n-play connections
- Includes cigarette adapter and hardwire power options




DL-RGBK1 RGB INTERIOR KIT

- 4pc 12" RGB LED Strips

[VIEW PRODUCT](#) - MetraOnline.com

[PURCHASE NOW](#) - MetraDealer.com

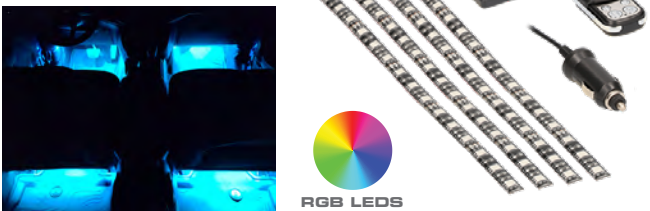


DL-RGBK3 RGB WHEEL WELL KIT

- 4pc 24" RGB LED strips

[VIEW PRODUCT](#) - MetraOnline.com

[PURCHASE NOW](#) - MetraDealer.com

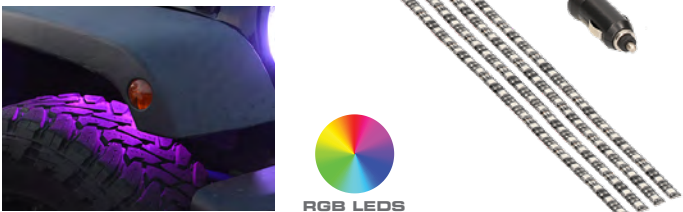

DL-RGBK2 RGB 10 STRIP KIT

- 10pc 4" RGB LED strips

[VIEW PRODUCT](#) - MetraOnline.com

[PURCHASE NOW](#) - MetraDealer.com




DL-RGBK4 RGB UNDER-BODY KIT

- 2pc 36" RGB LED strips
- 2pc 48" RGB LED strips

[VIEW PRODUCT](#) - MetraOnline.com

[PURCHASE NOW](#) - MetraDealer.com

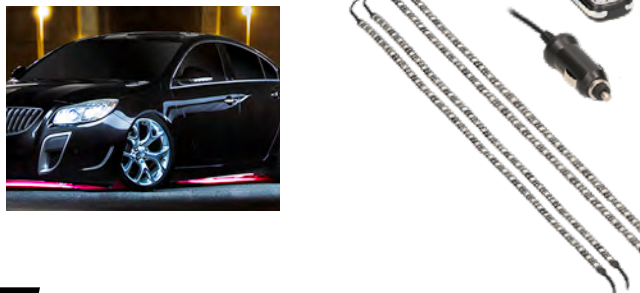

RGB LED STRIP KIT ADDITIONAL ACCESSORIES

DL-RGBEX2



[VIEW PRODUCT](#) - MetraOnline.com

[PURCHASE NOW](#) - MetraDealer.com

DL-RGBEX4

- Extension cable available in 2' and 4'
- 4-pin male to 4-pin female
- Flat 4-pin connectors

[VIEW PRODUCT](#) - MetraOnline.com

[PURCHASE NOW](#) - MetraDealer.com

DL-RGBY



[VIEW PRODUCT](#) - MetraOnline.com

[PURCHASE NOW](#) - MetraDealer.com

- 4" RGB Y splitter
- (1) 4-pin male to (2) 4-pin female
- Flat 4-pin connectors



LED BULBS

20 WATTS PER BULB

ULTRA COMPACT

IP67 RATING



PAIR 40 WATTS

[FITMENT CHART](#) - Check if it fits! [VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com

Wattage: 20W per bulb
Total Length: 3.1" (78.2mm)
Heat Sink: 1.26" (32mm) diameter
IP Rating: IP67
Output: 6000lm*
Color Temperature: 6500K
Good For: Tight applications
Operating Temperature: -40° F to 176° F
* Lumen rating for pair

SINGLE-BEAM			DUAL-BEAM
DL-H1	DL-H11	DL-9006	DL-H4
DL-H3	DL-H16	DL-9012	DL-H13
DL-H7	DL-5202	DL-PSX24	DL-9004
DL-H8	DL-880	DL-PSX26	DL-9007
DL-H9	DL-881	DL-P13	
DL-H10	DL-9005		



NOT FOR USE ON PUBLIC ROADS

Keep your original factory bulbs so that you can replace them for use on public roads. Keep the box that the new bulbs came in to store the bulbs and be sure to handle them with care when removing and re-installing.

CANBUS DECODERS



PACKAGED PAIR

[FITMENT CHART](#) - Check if it fits! [VIEW PRODUCT](#) - MetraOnline.com [PURCHASE NOW](#) - MetraDealer.com

Use With: Vehicles that have CANBUS systems that monitor the headlights
Stops: Headlights from flashing
Simple: Plug-n-play connections

SINGLE-BEAM			DUAL-BEAM
DL-H1D	DL-H16D	DL-9012D	DL-H4D
DL-H3D	DL-5202D	DL-PSX24D	DL-H13D
DL-H7D	DL-880D	DL-PSX26D	DL-9004D
DL-H8D	DL-881D	DL-P13D	DL-9007D
DL-H9D	DL-9005D		
DL-H10D	DL-9006D		



TERMS & CONDITIONS

TERMS

Net 30 days from date of invoice on approved accounts. Minimum order: \$50 per invoice, orders less than required minimum incur a \$20 service charge.

FREIGHT

Freight on board (F.O.B.) from point of shipment. Freight will be charged on all drop-shipment orders.

CREDIT

In order to establish a credit line with Metra, an application for credit must be submitted listing a minimum of five (5) trade references and a bank with their addresses and phone numbers and must be signed by a principal or authorized officer of the company. A credit line will be established by our credit manager and must be maintained in a current status according to our terms (net 30 days). Credit not established or revoked requires remittance with order. Returned checks are subject to a fee of \$32.00.

RESALE TAX EXEMPTION CERTIFICATE

CA, TX, KY, NJ & FL customers must provide a valid resale card before an order can be placed.

CLAIMS

Title and risk of loss passes to buyer at F.O.B. shipping point and all claims must be filed with carrier. Any discrepancies must be reported to Metra within ten (10) days of receipt of shipment.

RETURNS

All sales are final. No returns or exchanges will be allowed without prior written authorization from Metra. All returns are subject to a 20% handling charge, must be in a salable condition and must have been purchased within sixty (60) days of return request. No stock balancing permitted. Copies of invoices must be mailed in advance for any return authorization (R.A.).

LIMITED WARRANTY

Metra warrants all of its products to be free from defects in material and workmanship for a period of 1 Year from date of shipment. Metra will, at its option, repair, replace, or allow credit on any part which, in Metra's opinion, is found defective under normal use. Warranty void on any items misused, altered in any way, tampered with or serviced by anyone other than Metra Electronics. This warranty of merchantability of fitness neither assumes or authorizes any other person to assume for it, any other liability in connection with its products. In no event shall we be liable for any incidental or consequential damages, or do we assume any other liability for any incidental or consequential damages, or do we assume any other liability except provided herein.

Metra Electronics® warrants this products only to the original purchaser.

BACKORDERS

If an item is temporarily unavailable for immediate shipment, we will back-order the item & ship as soon as possible from the nearest available warehouse, unless otherwise instructed. Metra reserves the right to make changes in or deletions of products or prices without prior notice.

*Metra will not assume any responsibility for damages to person or property due to incorrect interpretation of the material in this publication. Metra is not responsible for typographical or printing errors. Reproductions of editorial or pictorial content is strictly prohibited without prior consent from Metra.



WARNING:

This catalog does not advise whether a State of California Proposition 65 warning is required for a particular item of merchandise. To learn whether a particular item of merchandise requires a California Proposition 65 warning, please be sure to look up and read the particular merchandise's listing on Metra's website www.MetraOnline.com, as well as read the particular merchandise's packaging. When a California Proposition 65 warning is present on Metra's website listing for the particular merchandise, or on the particular merchandise's packaging, a compliant California Proposition 65 warning is to be provided to the purchasing California consumer prior to the sale of the particular merchandise.

DAYTONA LIGHTS®

CORPORATE HEADQUARTERS

Metra Electronics Corporation
460 Walker Street
Holly Hill, FL 32117-2699

Metra Corporate: 386.257.1186
Metra 12volt &
International Sales: 386.257.2956
Sales Fax: 386.258.3940

facebook.com/MetraElectronics



instagram.com/MetraElectronics



youtube.com/MetraElectronics



linkedin.com/company/metra-electronics



Order Anytime Day or Night
at MetraDealer.com



Download all of our New Catalogs
at MetraOnline.com



MetraDealer.com

©2025 Metra Electronics Corp.
REV 07/02/2025

METRAONLINE.COM
386.257.2956

