


ROUSH®

DAMPING ADHESIVE — RA925

RA925 is an acrylic-based viscoelastic adhesive designed to have high damping performance over a wide temperature and frequency range. This material is excellent for laminating or in applications for constrained-layer damping.

www.roush.com

We're focused, we're efficient, and we're at our best when we're challenged to think outside the box — critical traits when our customers' success depends on how quickly we can take their visions from the sketchpad to the marketplace.

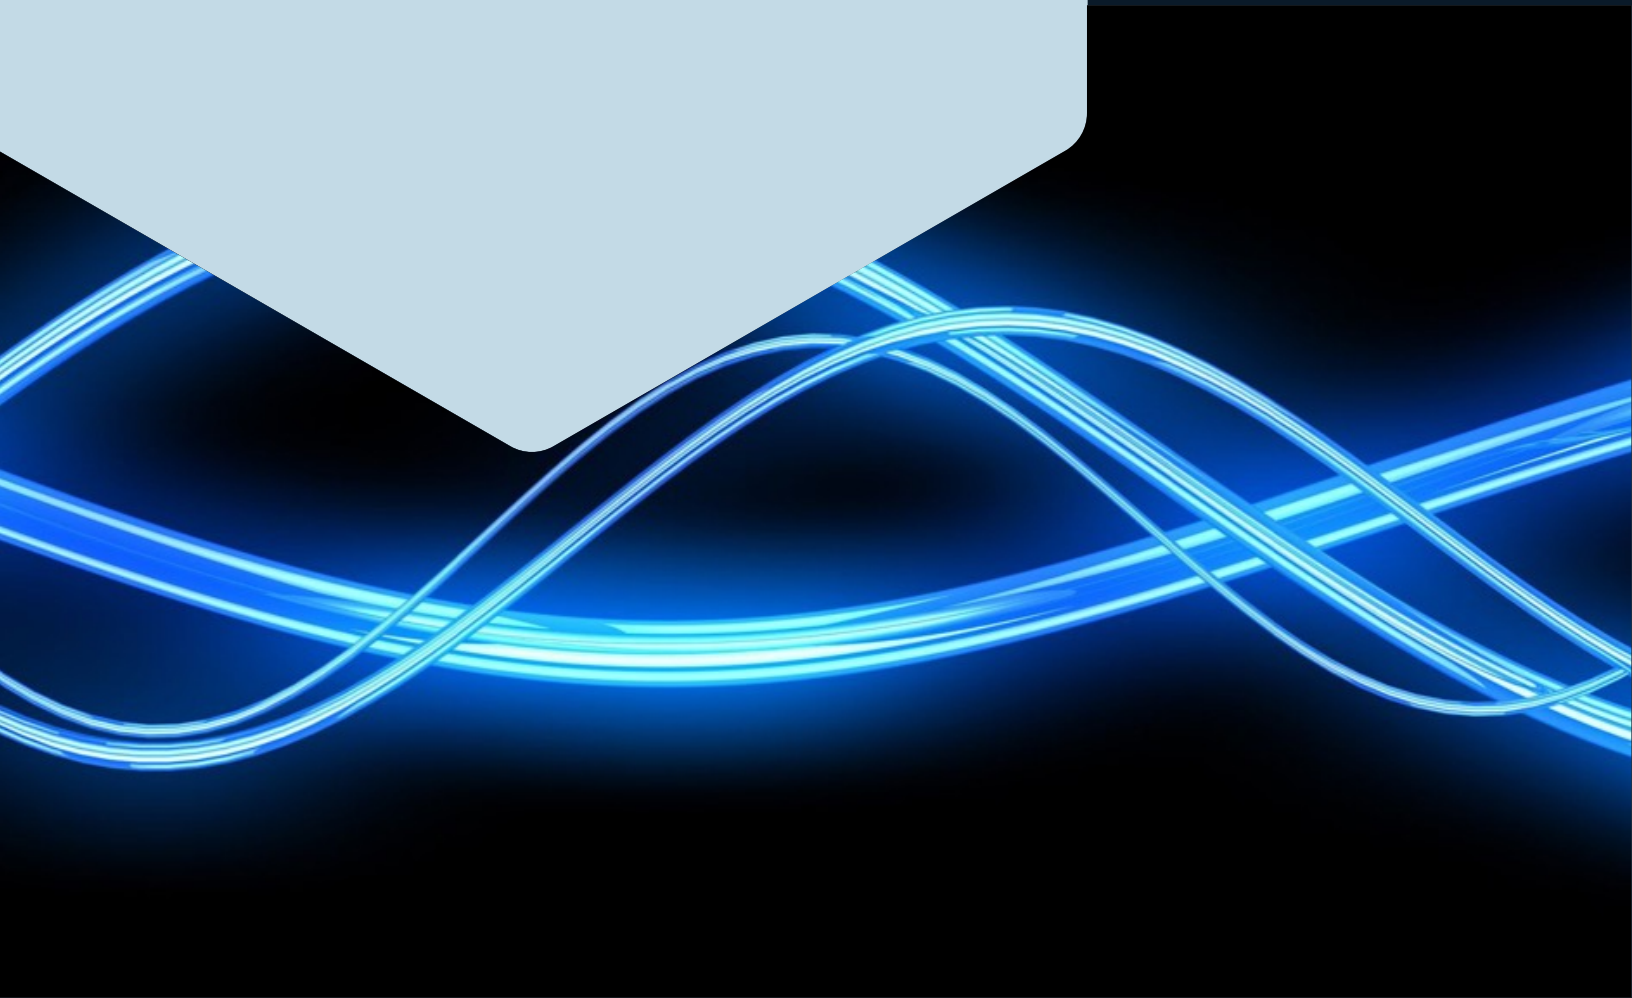

FEATURES:

RA925 damped viscoelastic adhesive offers superior damping performance over a wide temperature and frequency range with peak damping near room temperature. This material is specially processed to achieve cleaner outgassing properties over generic pressure sensitive adhesives. This makes RA925 ideal for use in the computer/electronics industry as laminate and constrained layer damping products. RA925 is very stable, resistant to UV exposure, thermal aging and creep/relaxation effects, and will maintain consistent performance over a long product life.

TYPICAL PHYSICAL PROPERTIES:

Adhesive Thickness.....	1 mil, 2 mil or custom
Release Liner.....	Available with variety of linear combinations
180° Peel Adhesion ¹ (ASTM D-3330 PSTC-1).....	3.0 lbs/in minimum after 24 hrs. dwell @ R.T., or 15 minutes @ 150°F
Shear Adhesion ¹ @ 4 psi (PSTC-7).....	24 hrs. minimum
Temperature Range:	
Adhesion.....	For best results, adhesion should be performed above 40°F
Damping @ 1000Hz	Excellent damping from 15°F to 110°F
Operating ²	-40°F to 250°F
Water, Humidity and Solvent Resistance.....	Excellent
Humidity Resistance.....	Excellent
Outgassing:	
Typical Total Outgassing (Static Headspace GC/MS, ASTM4526) ²	<1.5µg/cm ²
Typical Total Outgassing (Dynamic Headspace GC/MS, ASTM4526) ³	<1.5µg/cm ²

SHELF LIFE:

Two years when stored under cool, dry conditions out of direct sunlight (70°F, 50% RH)


Note:

- (1) 180° Peel Adhesion and Shear Adhesion values for 2 mil adhesive samples.
- (2) Defines temperature range material can operate within. Above 250°F, material will soften and flow due to thermoplastic nature.

ROUSH[®]

www.roush.com

RA925 — DYNAMIC MATERIAL PROPERTIES (ASTM E756 Test Results)

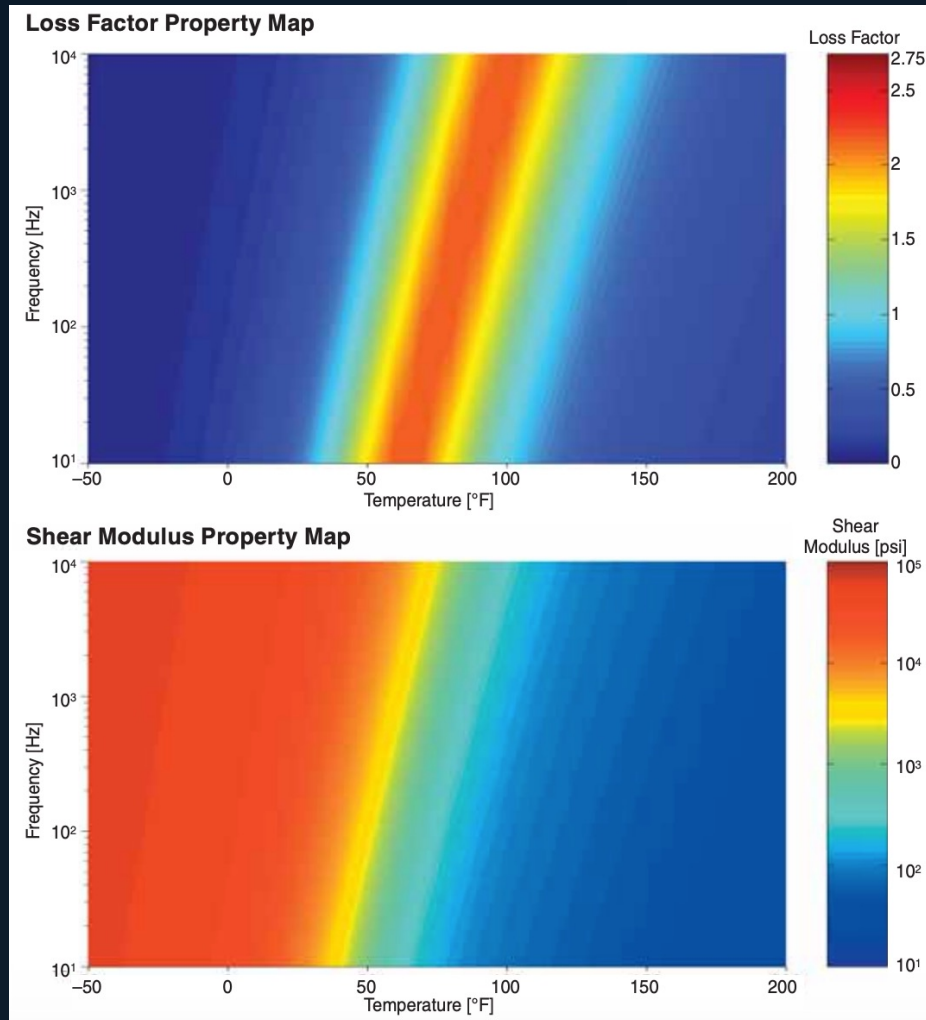

FULL-SERVICE NOISE AND VIBRATION CONTROL SUPPORT

Let Roush assist you with your noise and vibration control activities. We offer a full range of design, engineering, testing, and manufacturing capabilities. As an alternative to this material, we can search our database of over 3,000 materials to identify other potential material solutions. Once selected, Roush uses design and analyses to optimize the configuration of the material for your specific application. Roush provides manufacturing operations to convert this material into a finished part that can be delivered to your specifications. Roush has many worldwide partners that provide a wide array of low-cost manufacturing processes with high quality production output.

Product Performance and Suitability: All information regarding the use of Roush products identified in this datasheet is believed to be reliable by Roush, but are not product specifications and must only be used as a guide. Roush does not represent or warrant that its products are fit for a particular purpose or that they do not infringe any U.S. or foreign patents. Purchaser must independently determine the suitability of the Roush products for their particular application. Unless written otherwise in Roush's Terms and Conditions of Sale for the product, this datasheet or any verbal statements made by any other distributor, salesman or representative about the product will not be deemed to create an express warranty of any kind.

ROUSH[®]
www.roush.com