


5 THINGS TO DO FOR

EVERY

WOOD FLOOR INSTALLATION

1 APPROVE THE PRODUCT

Have your customer sign off on the floor and do your own inspection to look for damaged or defective pieces.

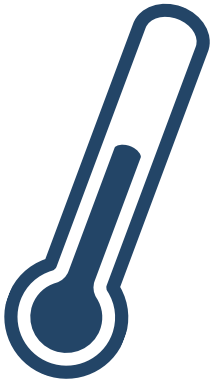

MAKE SURE HOME IS BETWEEN 35-55% RH AND 60-80°



2 ACCLIMATE THE FLOOR

Know manufacturer's recommended range for floor & subfloor. Use a professional moisture meter to test.

3 CHECK THE SUBFLOOR

A new floor won't fix a squeaky subfloor! Make sure it's clean, dry, flat and sound.

SUBFLOOR NEEDS TO BE: CLEAN, DRY, FLAT, AND SOUND



CHECK THE INSTALLATION GUIDE FOR NAILING AND GLUE INSTRUCTIONS

4 USE THE RIGHT FASTENERS OR GLUE AND TROWEL

Try a glue assist method with nail-down floors to prevent squeaks.

5 GET FINAL SIGNATURES

Get final written approval from your client. Leave helpful info about maintaining the wood floor.



SCAN FOR MORE GUIDES



Supply + Design

