




RealWoodFloors

LAMINATE WATERSAFE FLOORING

WELS

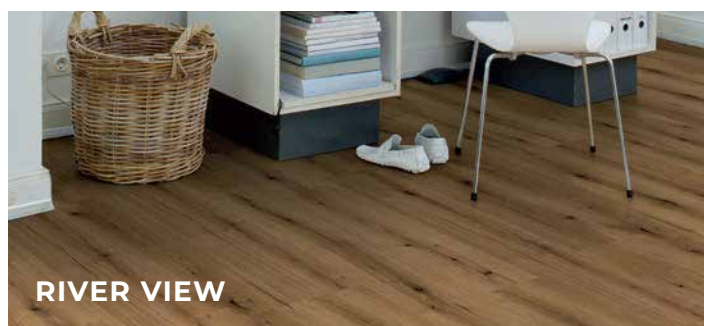

WIDTH 7.6"
LENGTH 54.45"
THICKNESS 8mm
AC RATING AC4
TEXTURE Embossed-
in-Register

BEVEL
PAD
LOCKING SYSTEM
BOX SIZE

Micro Bevel
Pad Attached
REALock Angle Tap
20.11 sqft

WARRANTY
30 Year Residential Warranty
5 Year Light Commercial

LIENZ



COURTYARD



FOUNTAIN



LAKESHORE



MOONLIT BRIDGE



STONE CASTLE



SUMMER BREEZE



TRAIN RIDE



TWINKLING LIGHT

WIDTH 7.6"
LENGTH 50.79"
THICKNESS 10mm
AC RATING AC4
TEXTURE Embossed

BEVEL
PAD
LOCKING SYSTEM
BOX SIZE

Micro Bevel
No Pad Attached
REALock Angle Tap
21.44 sqft

WARRANTY
Lifetime Residential Warranty
5 Year Light Commercial


STEYR



ALPINE VIEW



APPLE STRUDEL

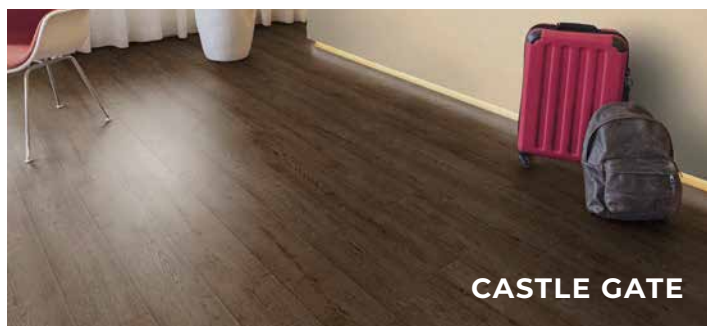

CASTLE GATE



COBBLESTONE



MORNING COFFEE



SLOPE SIDE



SUNLIT MEADOW



WARM LODGE

WIDTH 7.6"
LENGTH 50.79"
THICKNESS 12mm
AC RATING AC4
TEXTURE Embossed-
in-Register

BEVEL
PAD
LOCKING SYSTEM
BOX SIZE

Pressed Bevel
No Pad Attached
REALock Angle Tap
16.08 sqft

WARRANTY
Lifetime Residential Warranty
5 Year Light Commercial



Laminate provides the lifelike visuals of real wood with the assurance of an extremely durable and efficiently installed floor. At the heart of each plank is the water safe EuroCor920, creating a superior high impact resistant floor that utilizes the premium REALock Angle Tap system.



EuroCor920 is denser than traditional HDF, giving you more water protection, durability, and a better locking system.



The TriSeal system combines EuroCor920, a water-tight REALock click system, and a 2mm waterproof seal to give you a watersafe floor.

Certifications



ANTI-BACTERIAL PROPERTIES

The following values of the antibacterial activity were determined in the test according to ISO 22196:2007: Staphylococcus aureus: R > 3.9; Escherichia coli: R > 5.2. A clear antibacterial activity is given for R ≥ 1.

FORMALDEHYDE EMISSION TESTING

Result: 0.2 mg HCHO/hm² - Formaldehyde emissions, determined by ISO 12460-3, is below the max permissible value (< 3.5 mg HCHO/hm²) for coated wood materials according to the Formaldehyde Ordinance valid in Austria & the DIBT Guideline 100 (EI).

WWW.REALWOODFLOORS.COM