



**Product  
overview**

Edging Solutions are a series of exclusively designed trims to compliment the Autex Acoustics® range of acoustic solutions.

**Specification**


Autex Acoustics® Edging Solution Type(\_), Finish(\_)

The following types are available to suit a specific product or application.

All profiles are supplied in 2.8 m lengths.


Detail drawings can be supplied on request to suit a specific application or detail.

Contact your account manager for additional information.

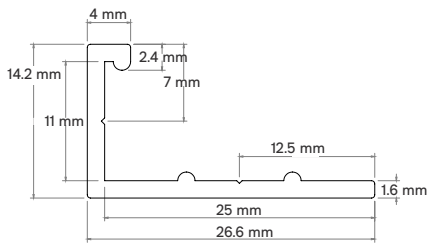


**Type AM - 10.5 mm**

Composition®, and Symphony®

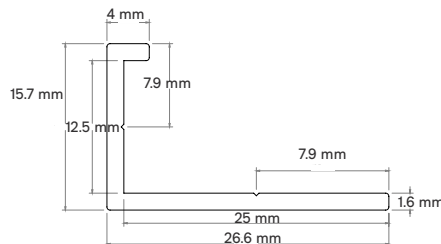


**Type BM - 12.0 mm**

12 mm Cube™

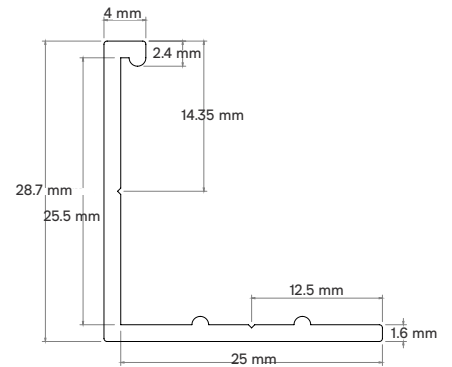


**Type CM - 24.0 mm**

24 mm Cube™, and 25 mm QuietSpace® Panel (nude and Vertiface® faced or overlaid)

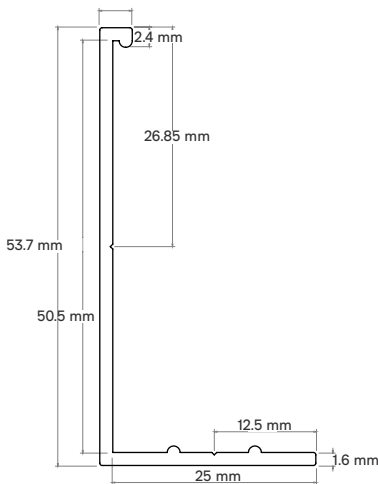


**Type DM - 50.0 mm**

50 mm QuietSpace® Panel (nude and Vertiface® faced or overlaid)

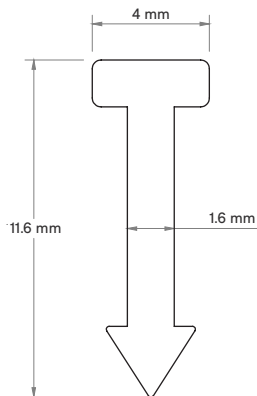

**Type EM - 50.0 mm**

Tee Joiner - compatible with Type AM, BM, CM, and DM Edging Solutions

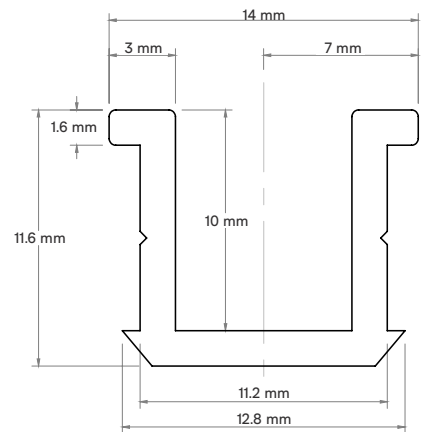

**Type FM - 50.0 mm**

50 mm QuietSpace® Panel (nude and Vertiface® faced or overlaid)



---

## Standard finishes



Ghost Grey



Black

---

Other finishes can be supplied and are subject to surcharge. Please contact your account manager for details.

---

## On-site care

Edging Solutions can be damaged if not handled with care. Avoid bending and crushing. Store in a safe place.

---

## General information

Edging Solutions should always be installed in accordance with the below instructions and as per the specification detail. If there is conflicting information, you must seek clarification from all appropriate parties before proceeding with the work.

It is imperative that the installation is planned before cutting and installing any product. Edging Solutions are referred to as trims in this document.

---

## General installation

Autex Acoustics recommends that you minimise the number of joins and avoid creating asymmetrical layouts.

Confirm where trims are required, then measure and cut with a suitable cutting tool such as a Hack Saw or power Mitre Saw. We recommend you "measure twice and cut once". Corners should be mitre cut. Trims are typically installed around the perimeter prior to fitting the acoustic panel. On completion of the job there should be no visible gaps between the acoustic panel and the edging trims.

Sharp edges are to be filed smooth.

Touch up with paint to match finish where it's required. Where Tee Joiners are used

between acoustic panels, allow for a small even gap to accommodate the Tee Joiner. A waste section of extrusion can be used to achieve a consistent gap. Ideally, the gap should be 2 mm wide.

Ensure no gaps are visible between profiles and panels once installed.

Cutting and installing Edging Solutions poses safety hazards if not adequately managed by the installer. Please identify site specific hazards and follow relevant local OH&S regulations and guidance. Suitable PPE such as safety goggles, hearing protection and gloves must be worn during the installation of Edging Solutions.

---

## Install method

### Mechanical fix

The head of the screw should be counter sunk. The fixings must be long enough to secure through the lining into the subframe.

Plaster and cement based linings require a suitable anchor.

Fixings should be placed no more than 25 mm from any end, and no more than 400 mm apart.

Where a Tee Joiner is being used, a bead of adhesive can be applied in the gap to secure in place. Care must be taken to ensure excessive adhesive is not applied and allowed to leak out on to panel surface.

### Adhesive fix

The only instances in which Autex Acoustics recommends using an adhesive to fix trims, is when the substrate is not suitable to pick up a mechanical fixing. Autex Acoustics recommends a high quality MS tape and construction adhesives. Check with the adhesives supplier for compatibility and any preparation requirements. It is the installer's responsibility to ensure that any adhesive is fit for the intended purpose.

It also is the installer's responsibility to ensure that the substrate is fit for the application of adhesives. For information regarding adhesive suppliers, please contact your account manager.

---



---

## Install method continued

Contact and double-sided tapes are not recommended.

Adhesives should be applied strictly in accordance with the adhesive manufacturer's instructions. Refer to the product label or the technical datasheet for spread rates, tack-off times, application methods, and equipment required.

The job should be progressively checked for appearance, installation quality, and adequate adhesion. Any faults must be notified and discussed with your account manager. No claims will be accepted where the job continues with obvious faults, and no consultation with Autex Acoustics has taken place.

Care must be taken to ensure excessive adhesive is not applied and allowed to leak out onto panel and substrate.

Adhesive spills or surface contamination should be cleaned immediately ensuring care instructions on the specific Autex Acoustics product Care and Maintenance Guide are followed.

### Completion

Check and ensure all profiles are fixed securely. Ensure any sharp edges are removed and remove any waste and filings. Recycle off cuts where possible.

---

● **New Zealand**  
702-718 Rosebank Road,  
Private Bag 1998  
Avondale 1746, Auckland  
New Zealand  
Freephone 0800 428 839  
Phone +64 9 828 9179  
Fax +64 9 828 5810

● **Australia**  
285 Swan Street,  
Richmond, VIC 3121,  
Australia  
Freephone 1800 678 160  
Phone +61 3 9450 6700

● **United Kingdom**  
Unit J4, Lowfields Way,  
Lowfields Business Park,  
Elland, West Yorkshire  
HX5 9DA  
United Kingdom  
Phone +44 0 142 241 8899

● **United States**  
1630 Dan Kipper Drive,  
Riverside, CA 92507  
United States of America  
Phone +1 424 203 1813

Autex is an ISO certified organisation encompassing Quality (ISO 9001), Environmental (ISO 14001), and Health and Safety (ISO 45001). Brand names and logos are registered or unregistered trademarks owned or used under license by Autex Industries Limited or other members of the Autex Group. © Copyright 2022 Autex Industries Ltd. All rights reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.