

Specification Guide

Inspired by the way light and shadow animate shape, Verve™ moulds static surfaces into sculptural features. Whether rounded or angular, organic or linear, each profile has a unique cross-sectional rhythm—revealing a new perspective with every step.

Six unique patterns are available across the full Cube™ colour palette and selected Surface Finishes.

A collection where each contoured panel brings a visual language that shapes your surroundings, blending acoustic performance with expressive design.

In everything we do




Verve™ Contoured Panels



Path to Specification


1. Space

What are the dimensions of the space you are designing?




2. Size

What panel dimensions are available?



3. Style

What styles are available?




[Page 3](#)

[Page 4](#)


4. Detail Considerations

What install details should I consider?

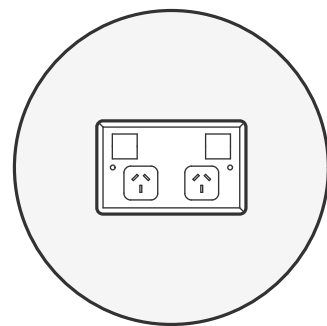


5. Colours and Finishes

What colours and finishing options are available?



6. Technical Information

What are the technical specifications?



[Page 11](#)

[Page 12-13](#)

[Page 16](#)



Quick Reference

Panel Dimensions



Width 1170mm
Height 2400mm, 2700mm (standard)
 3000mm (MOQs apply)
Thickness 12mm, 21mm

Please contact your Autex Acoustics® account manager for more information.


Connection Method

Adhesive Panels can be installed with appropriate adhesive (supplied by contractor)


See Product Installation Guide for further details.

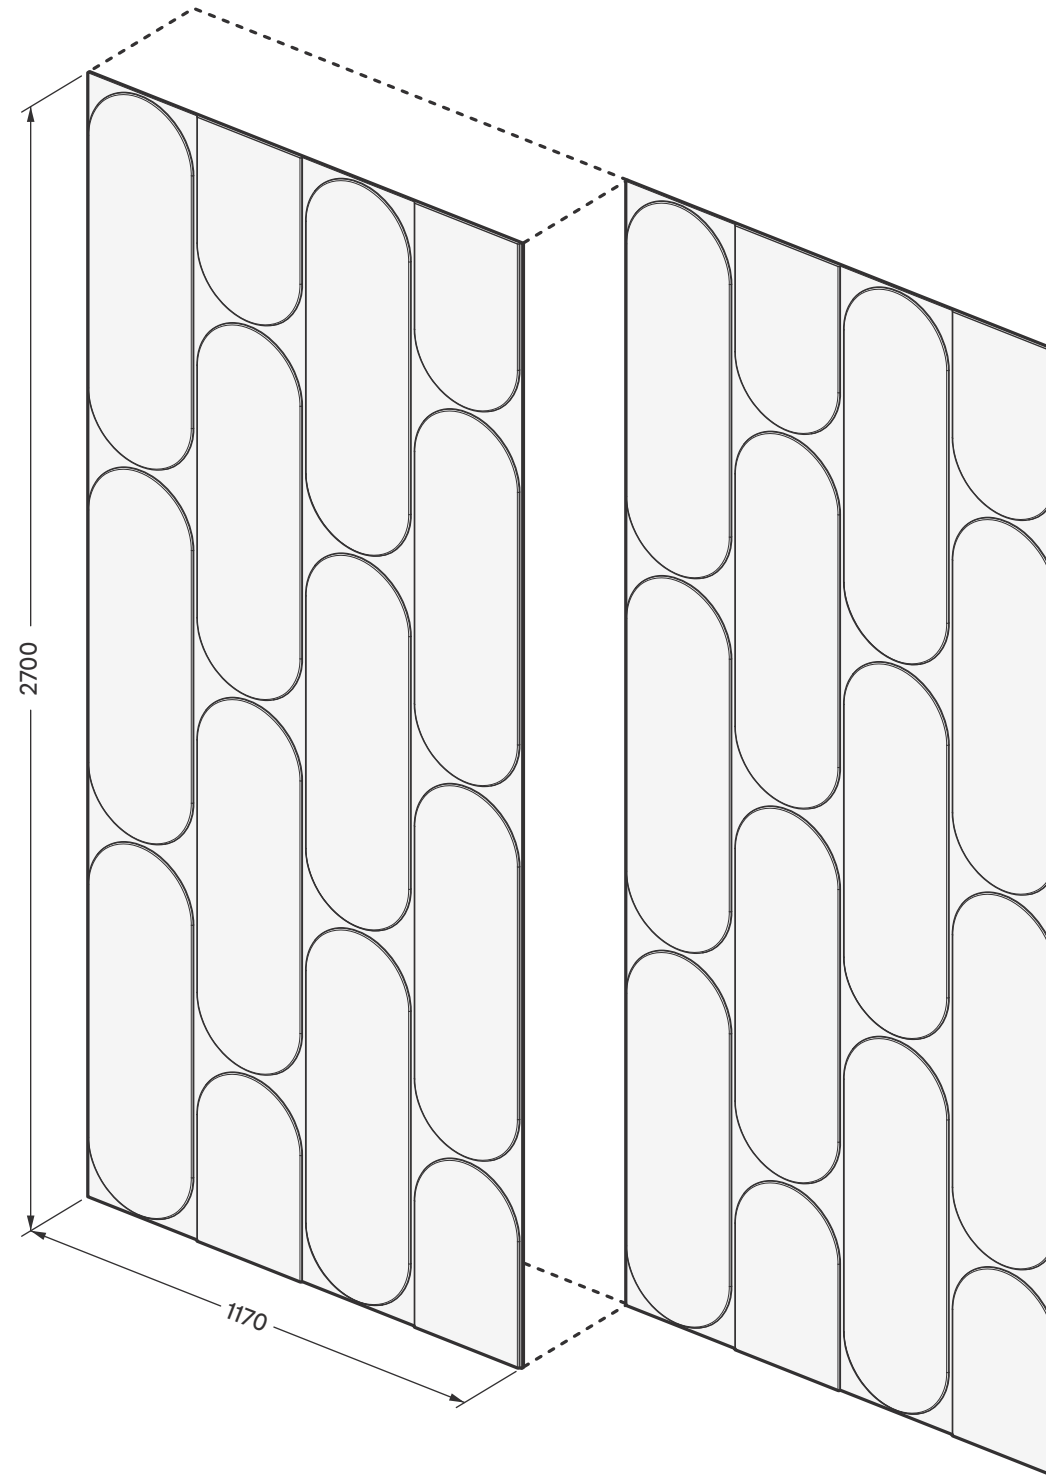

Edge Detail



12mm Thickness
(6mm Edge Thickness)




21mm Thickness
(15mm Edge Thickness)

Only available in Ridge and Flute Styles




Styles Overview


Pillar

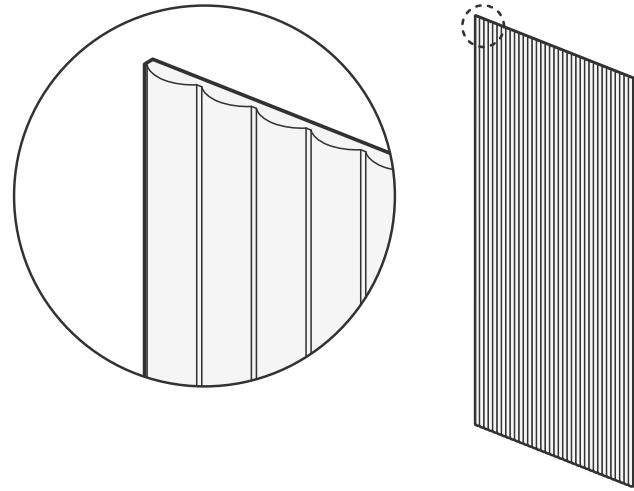


Pinstripe

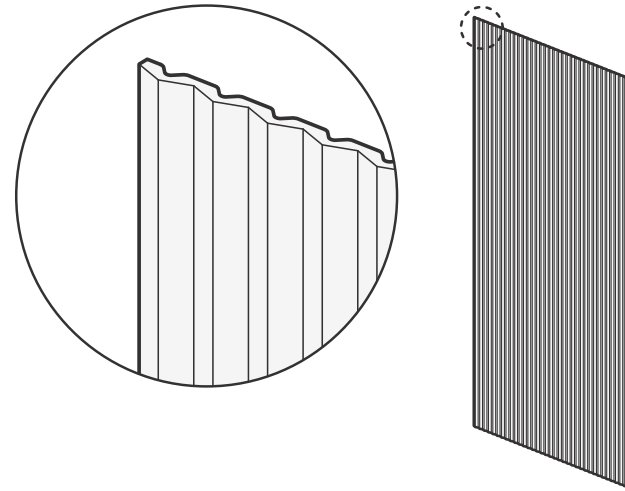


Ridge

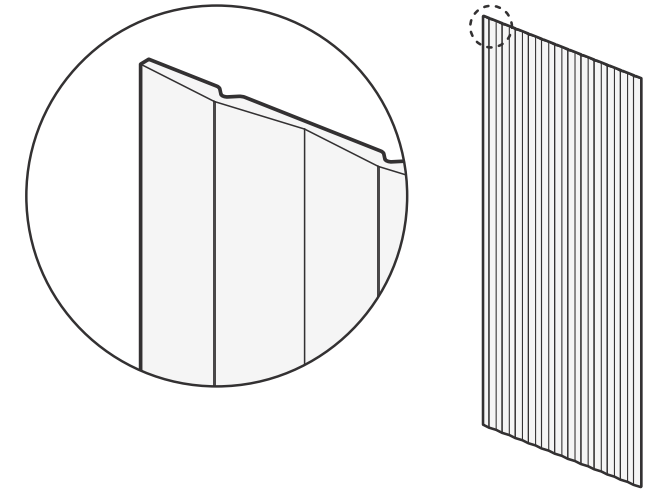


Flute

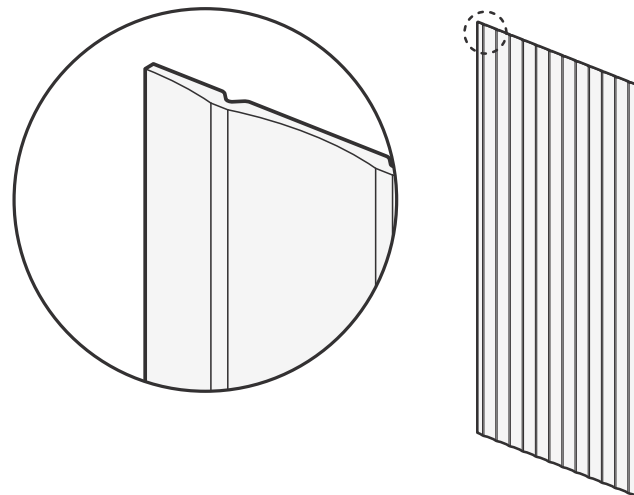

Windswept

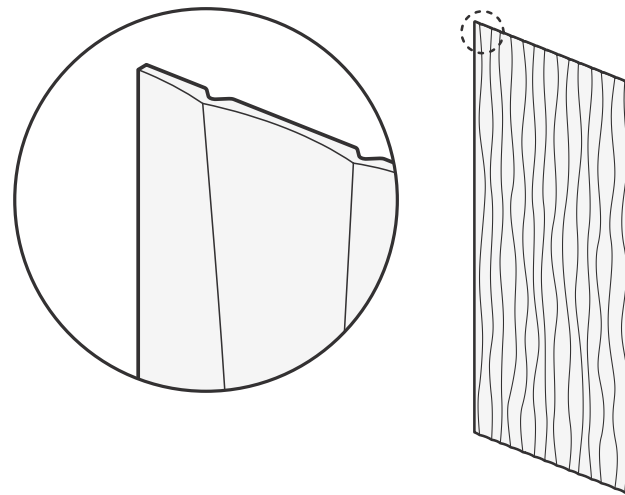

Ovolo

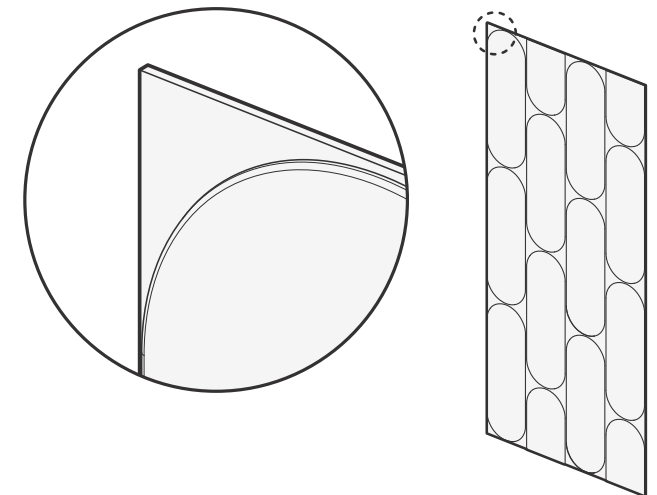





Pillar

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

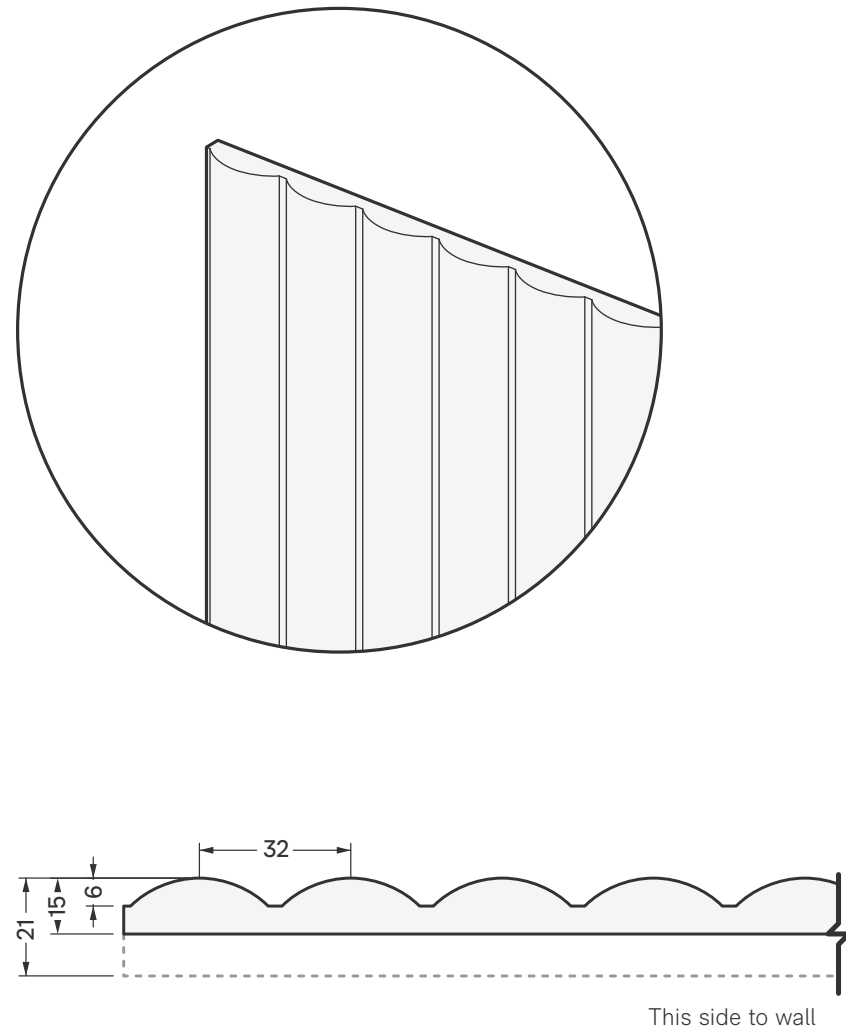

Layout Overview

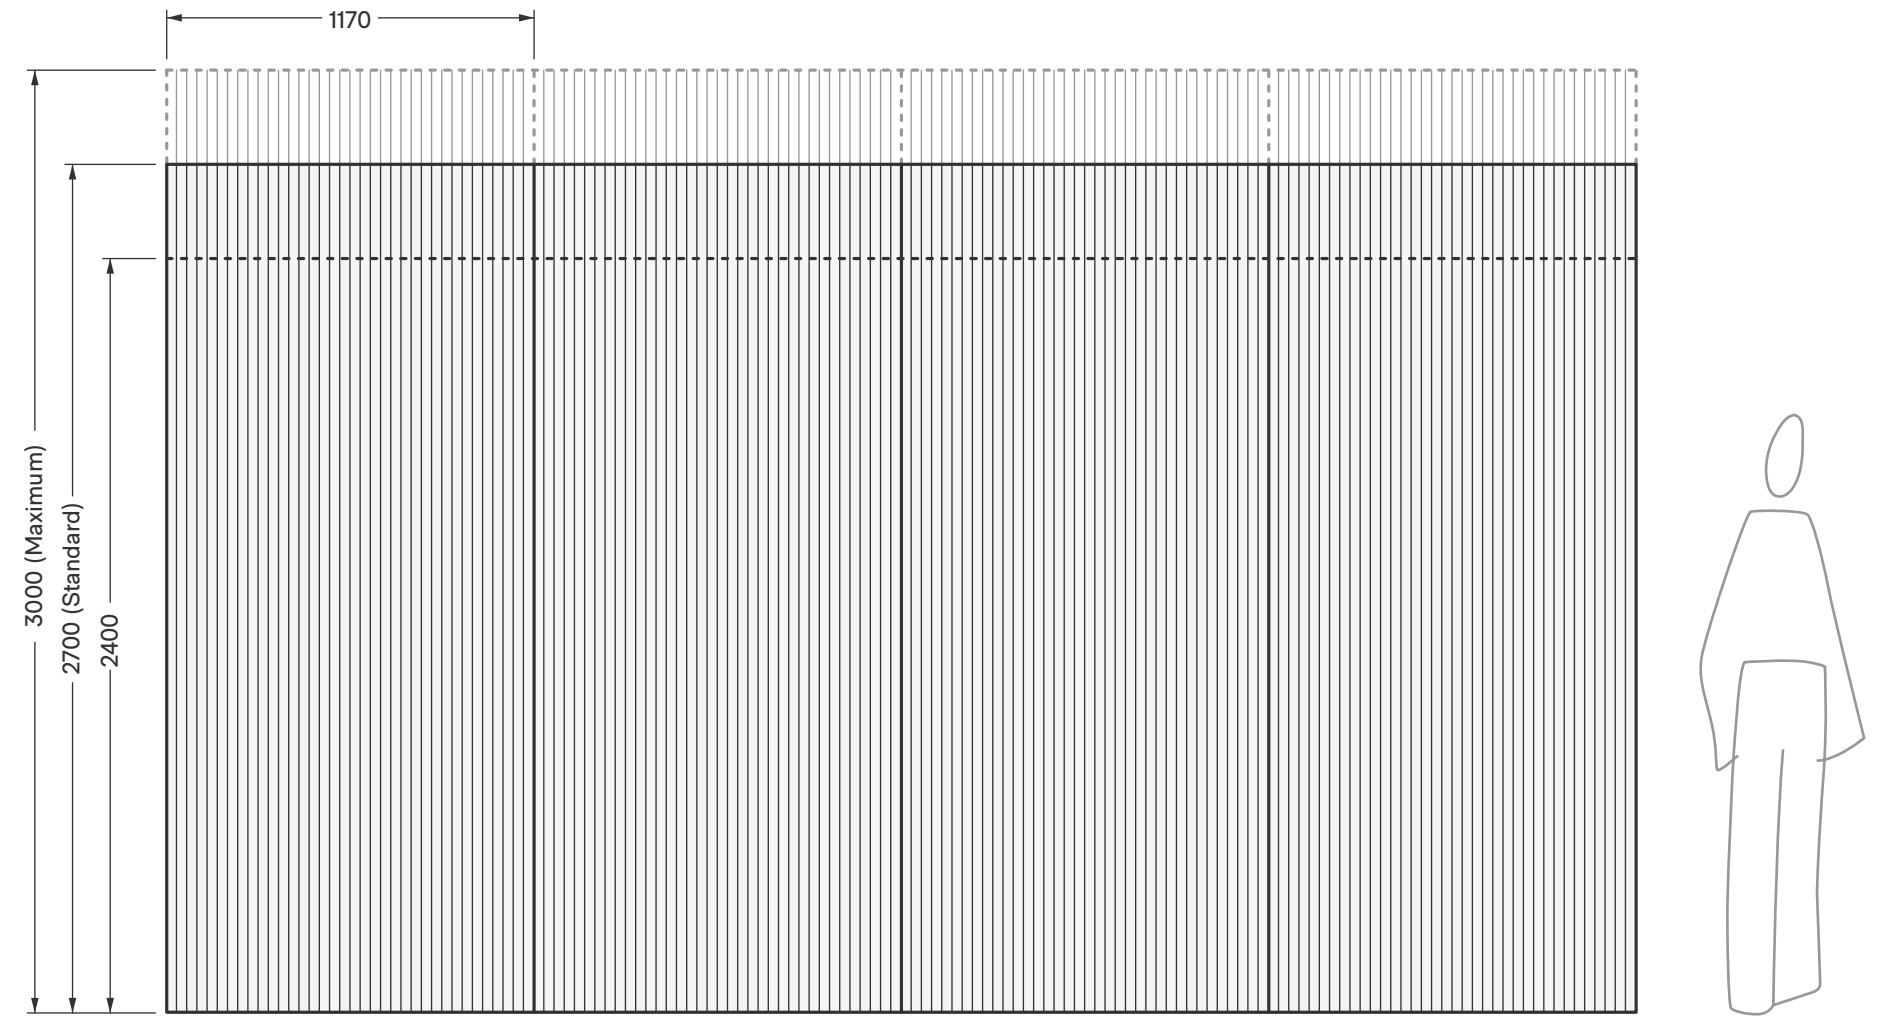





Pinstripe

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

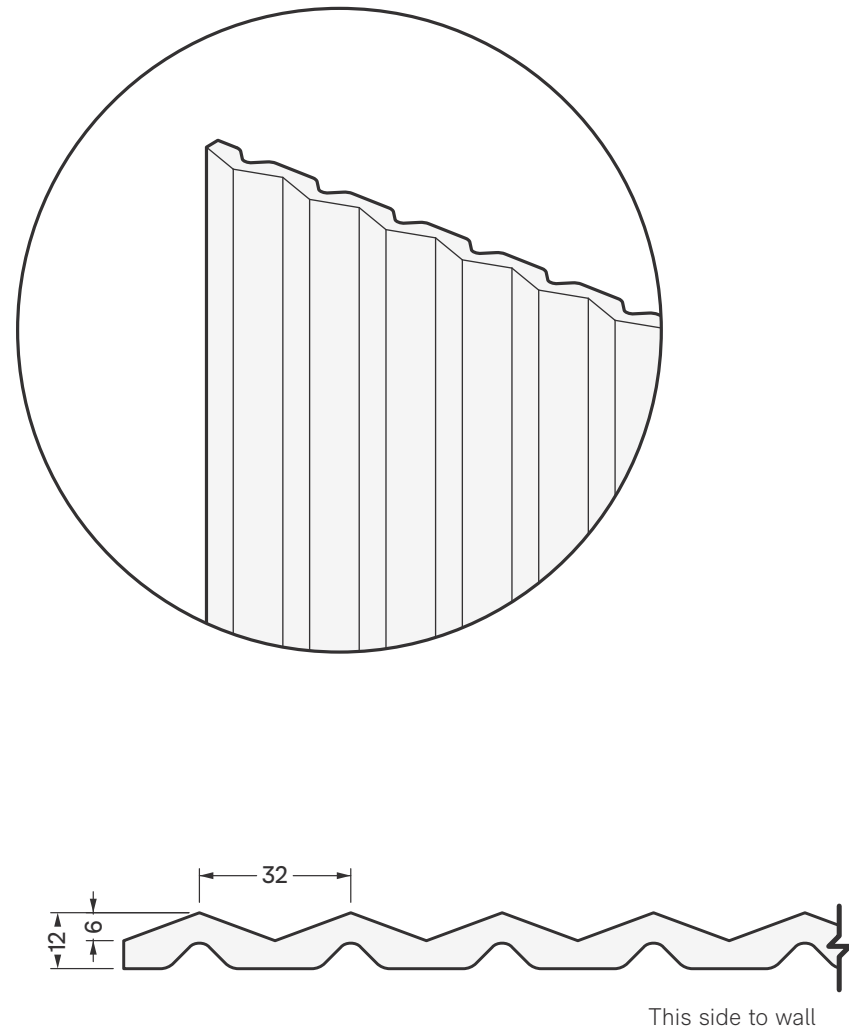

Layout Overview

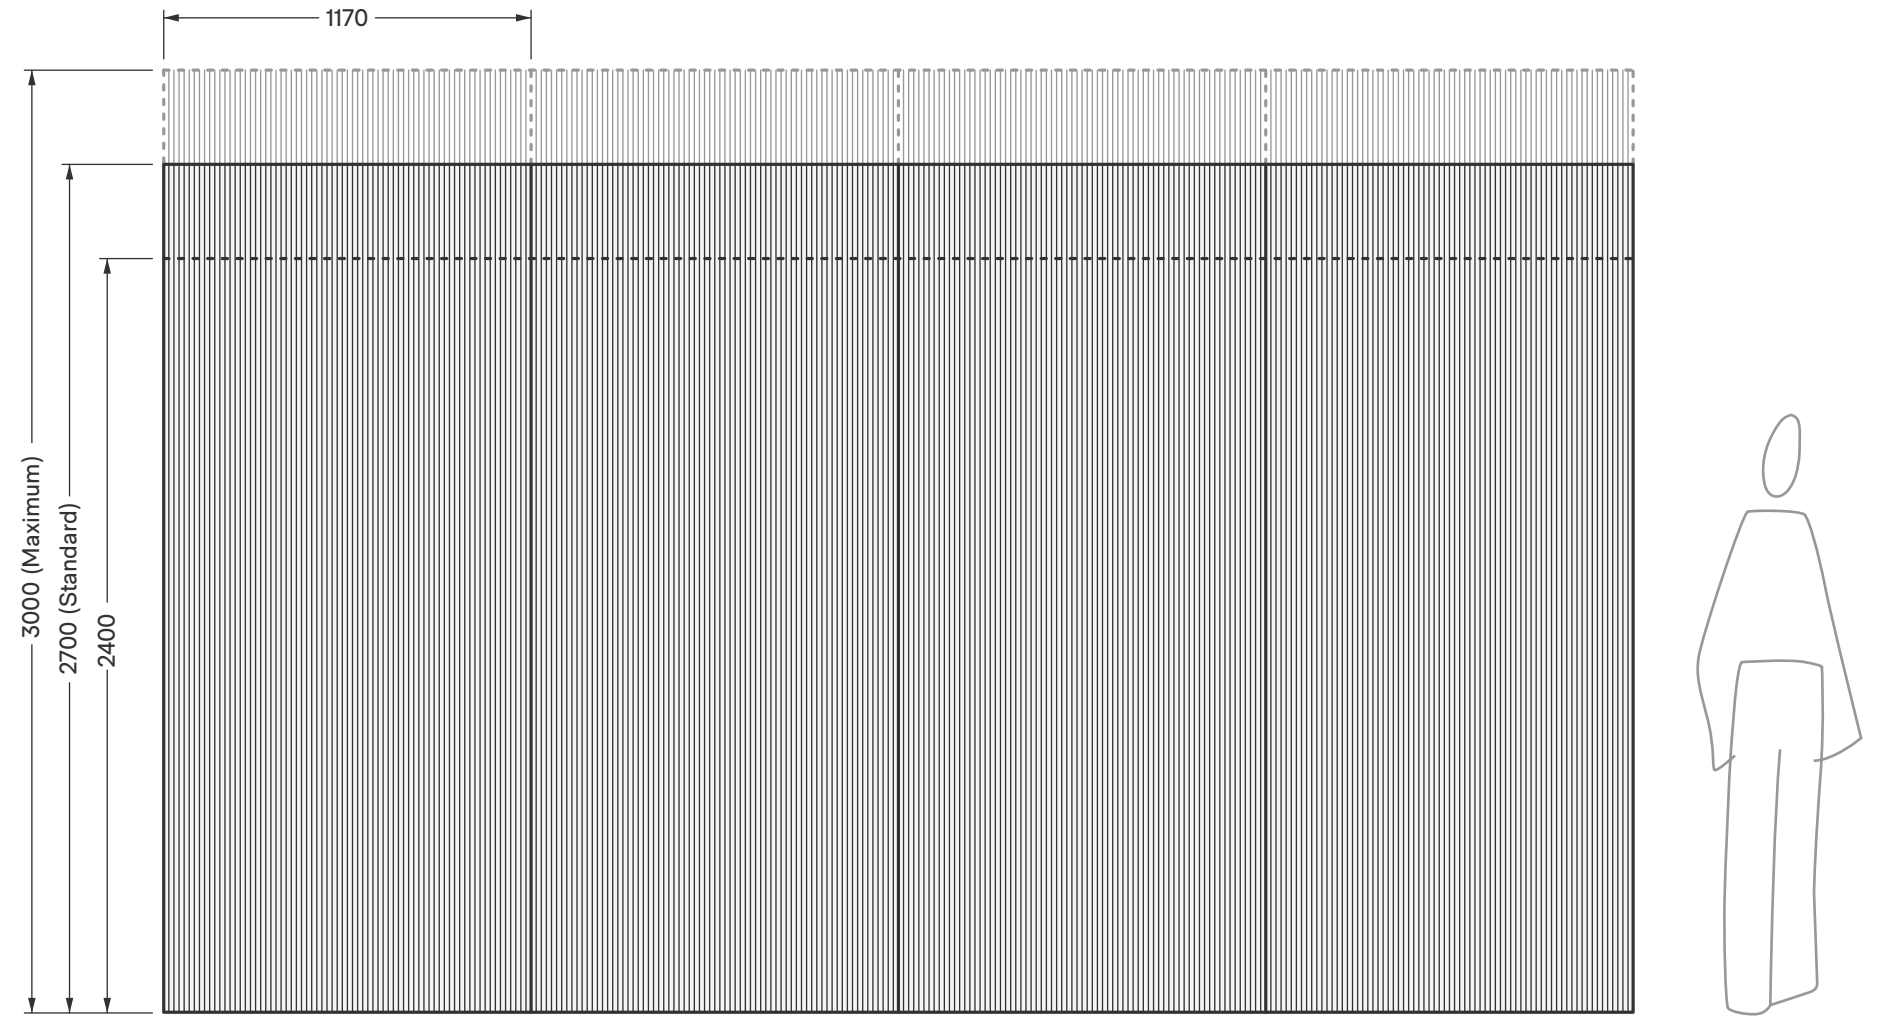





Ridge

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

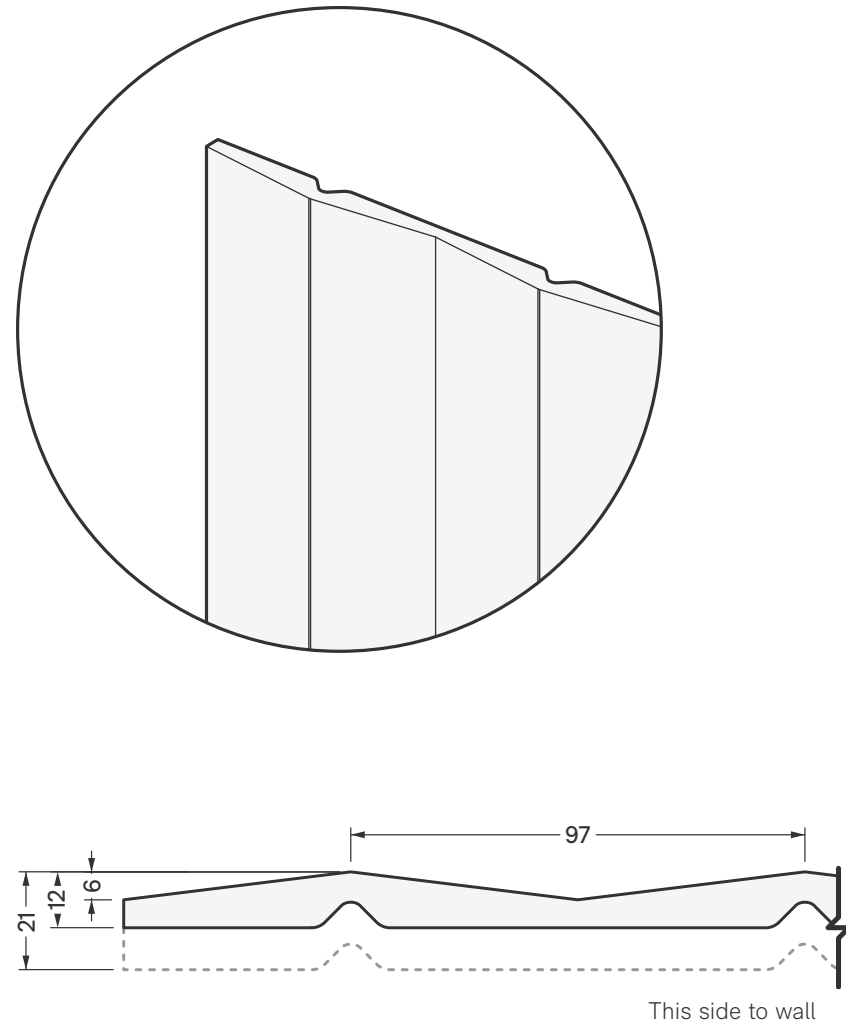

Layout Overview

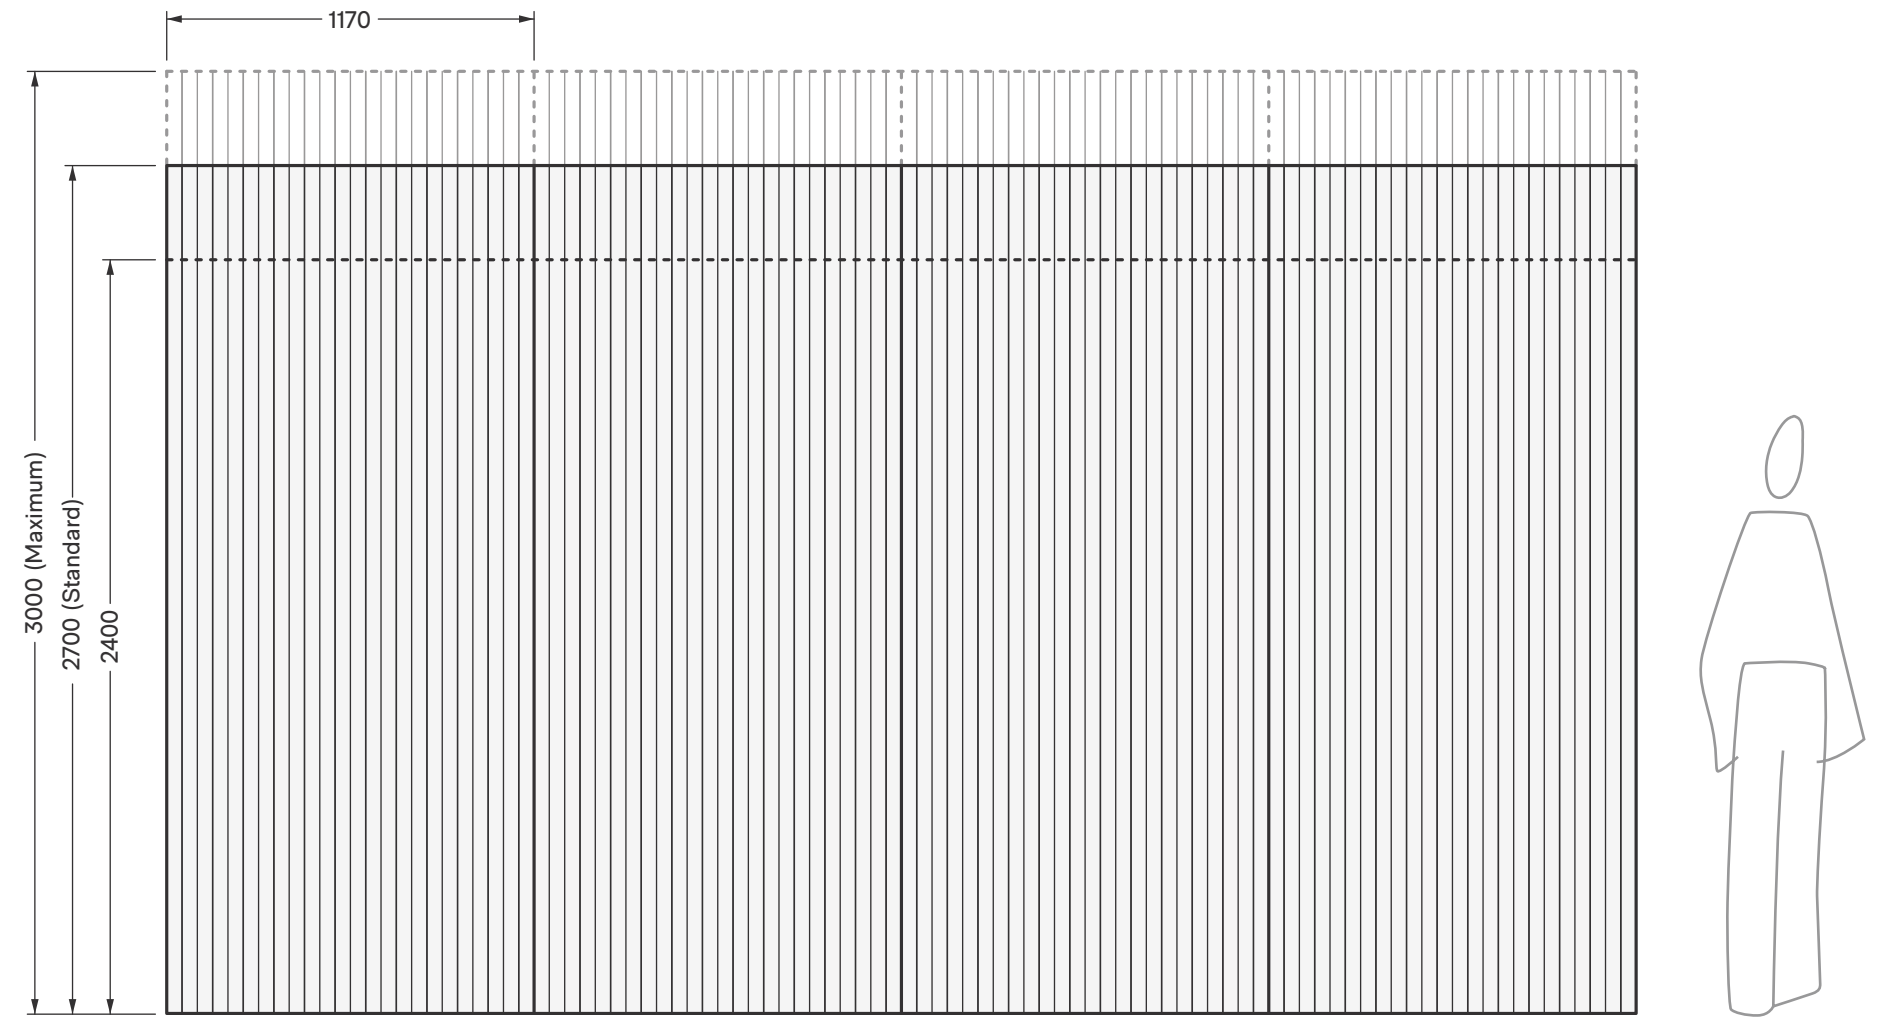





Flute

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

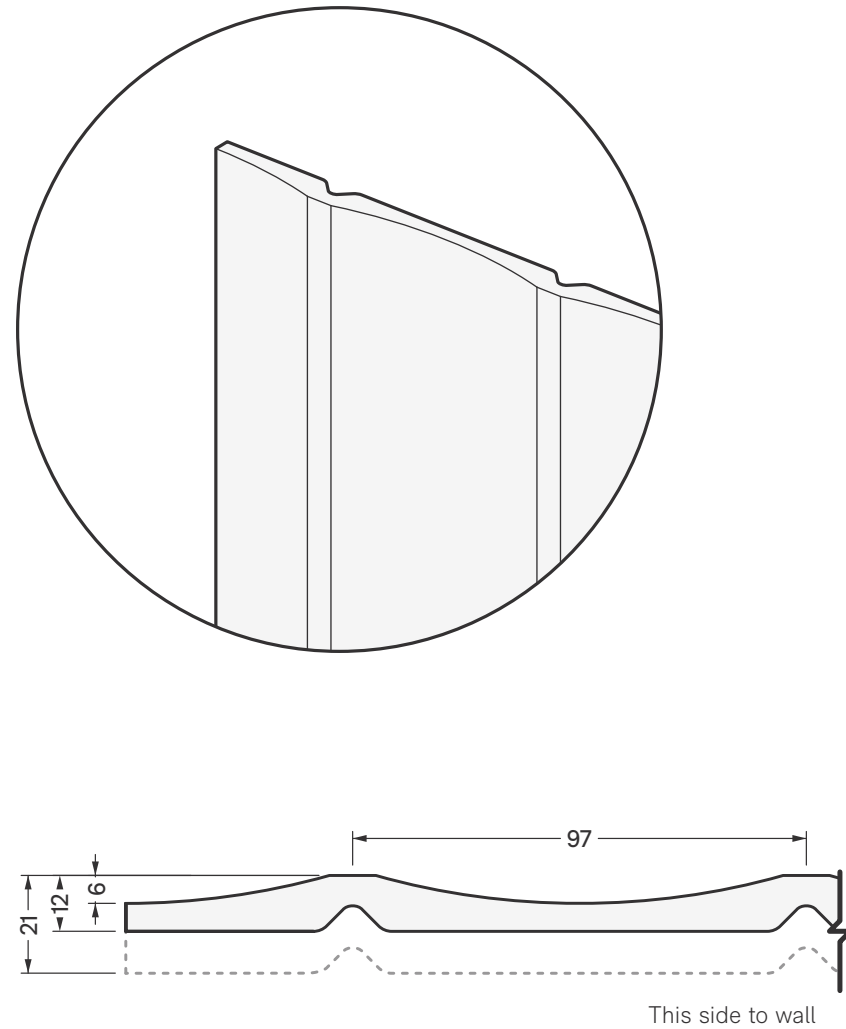

Layout Overview

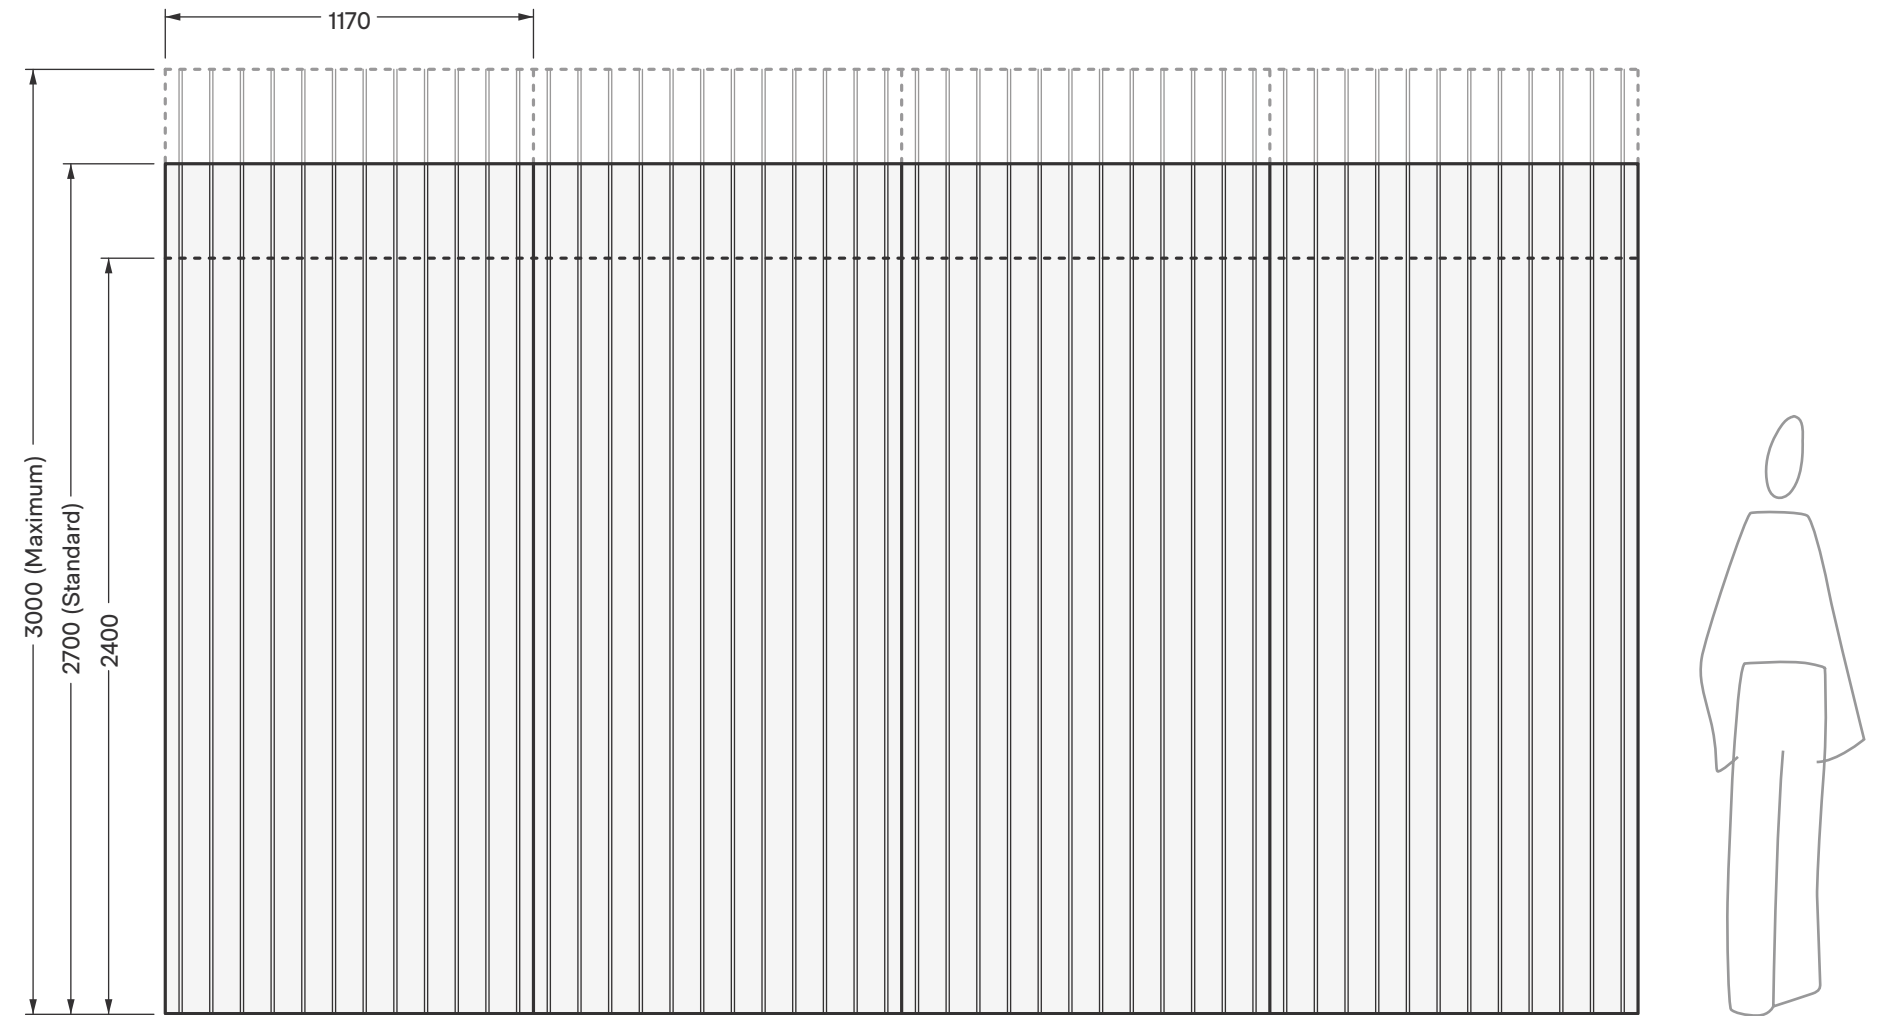





Windswept

- The horizontal pattern repeats at the lowest relief point, refer to pattern dimensions below
- The vertical pattern continues seamlessly at any length

Panel Details

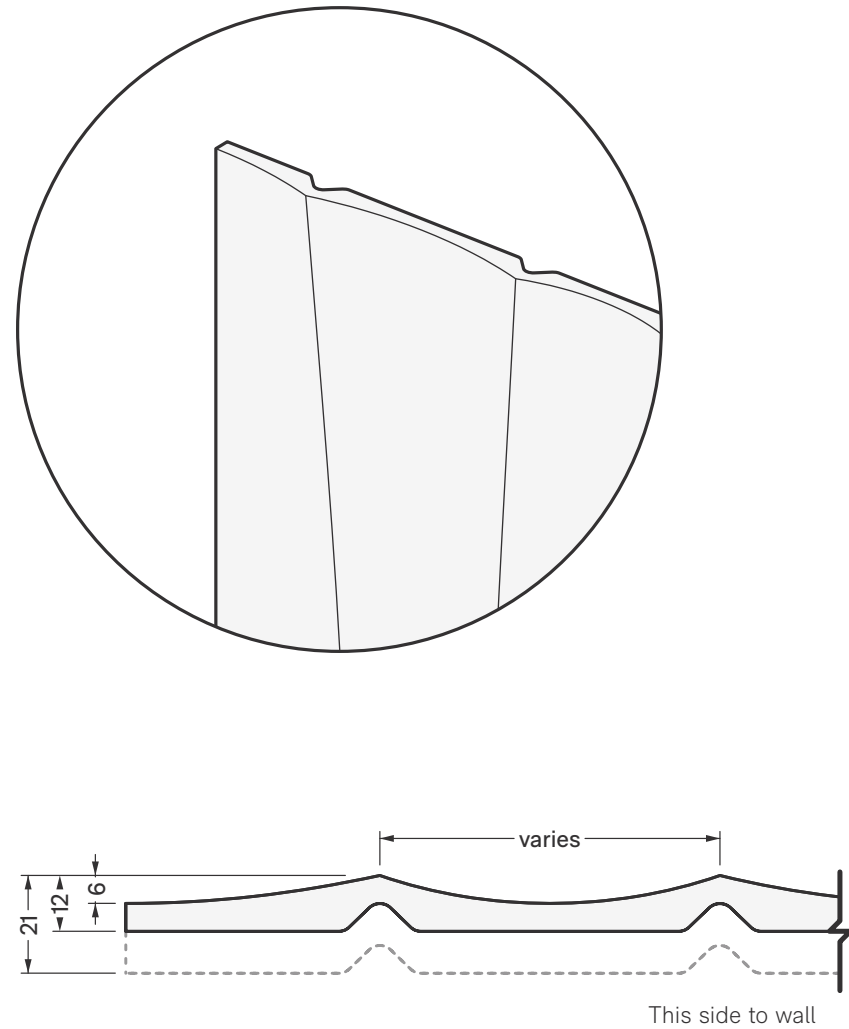

Layout Overview

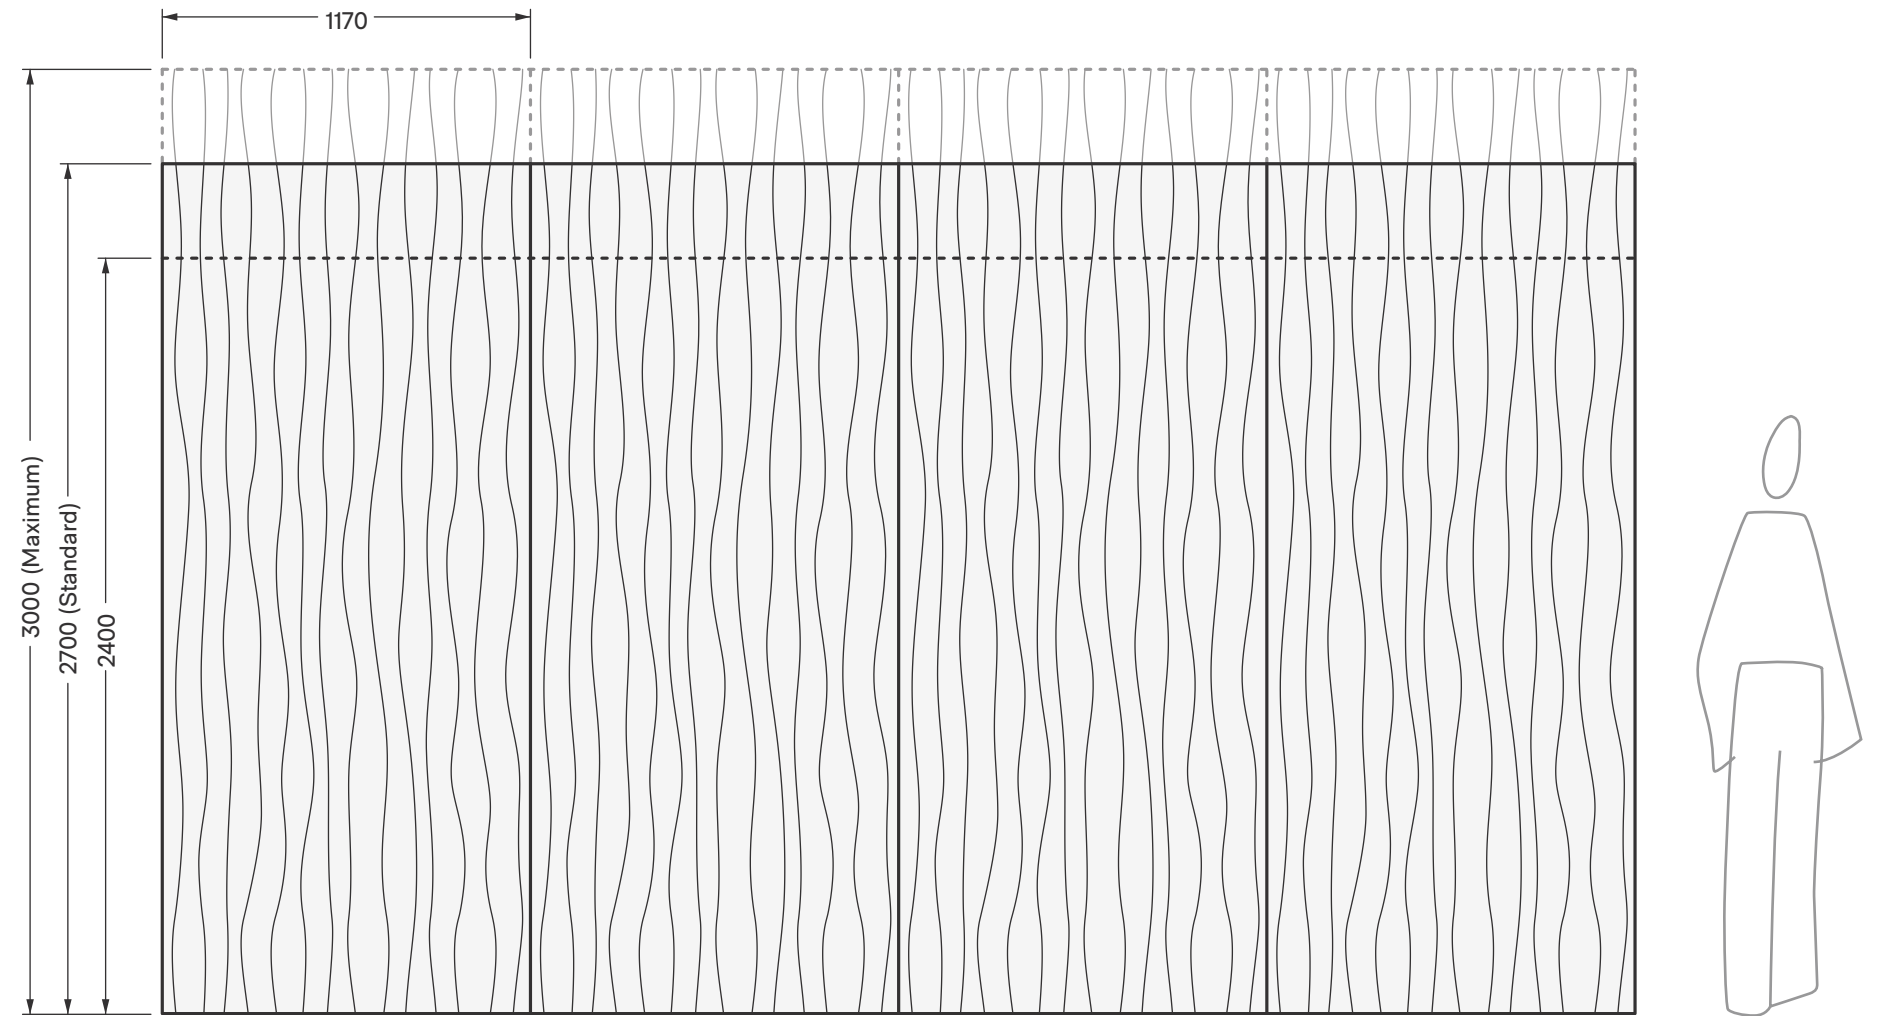





Ovolo

- The horizontal pattern repeats at panel edges (1170mm) and panel centre, refer to pattern dimensions below
- The vertical pattern repeats at centre points between pill details (5mm either side of relief)

Panel Details

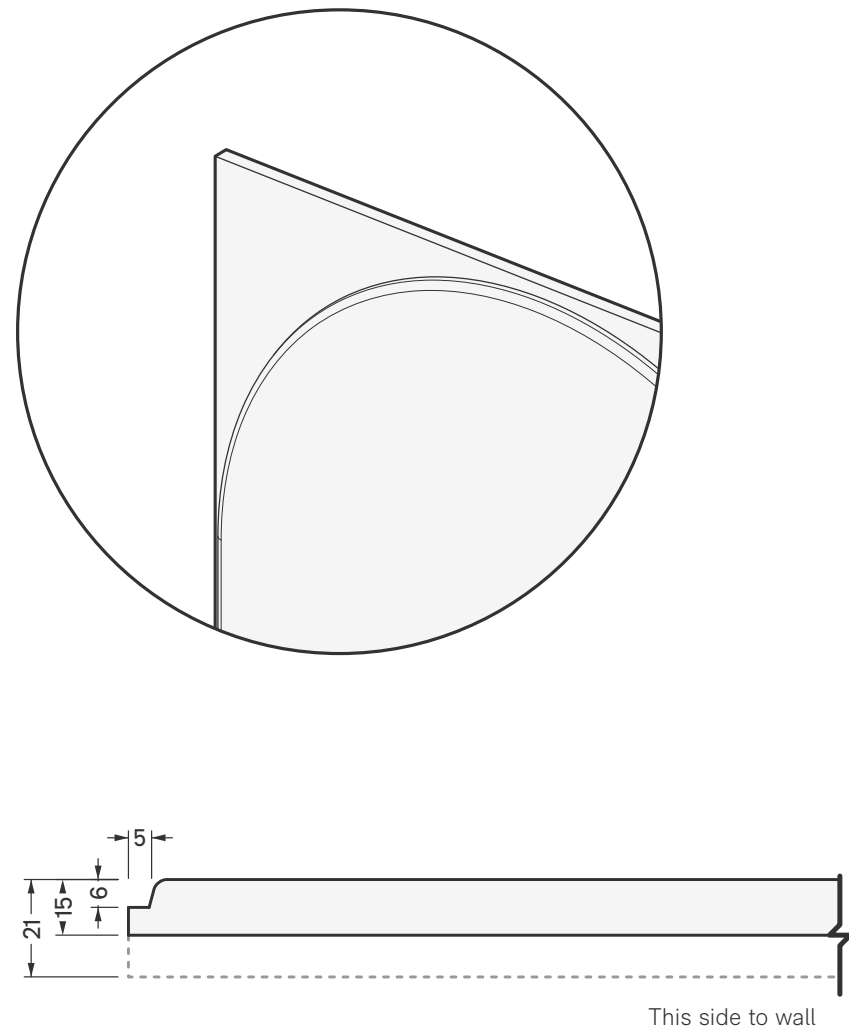

Layout Overview

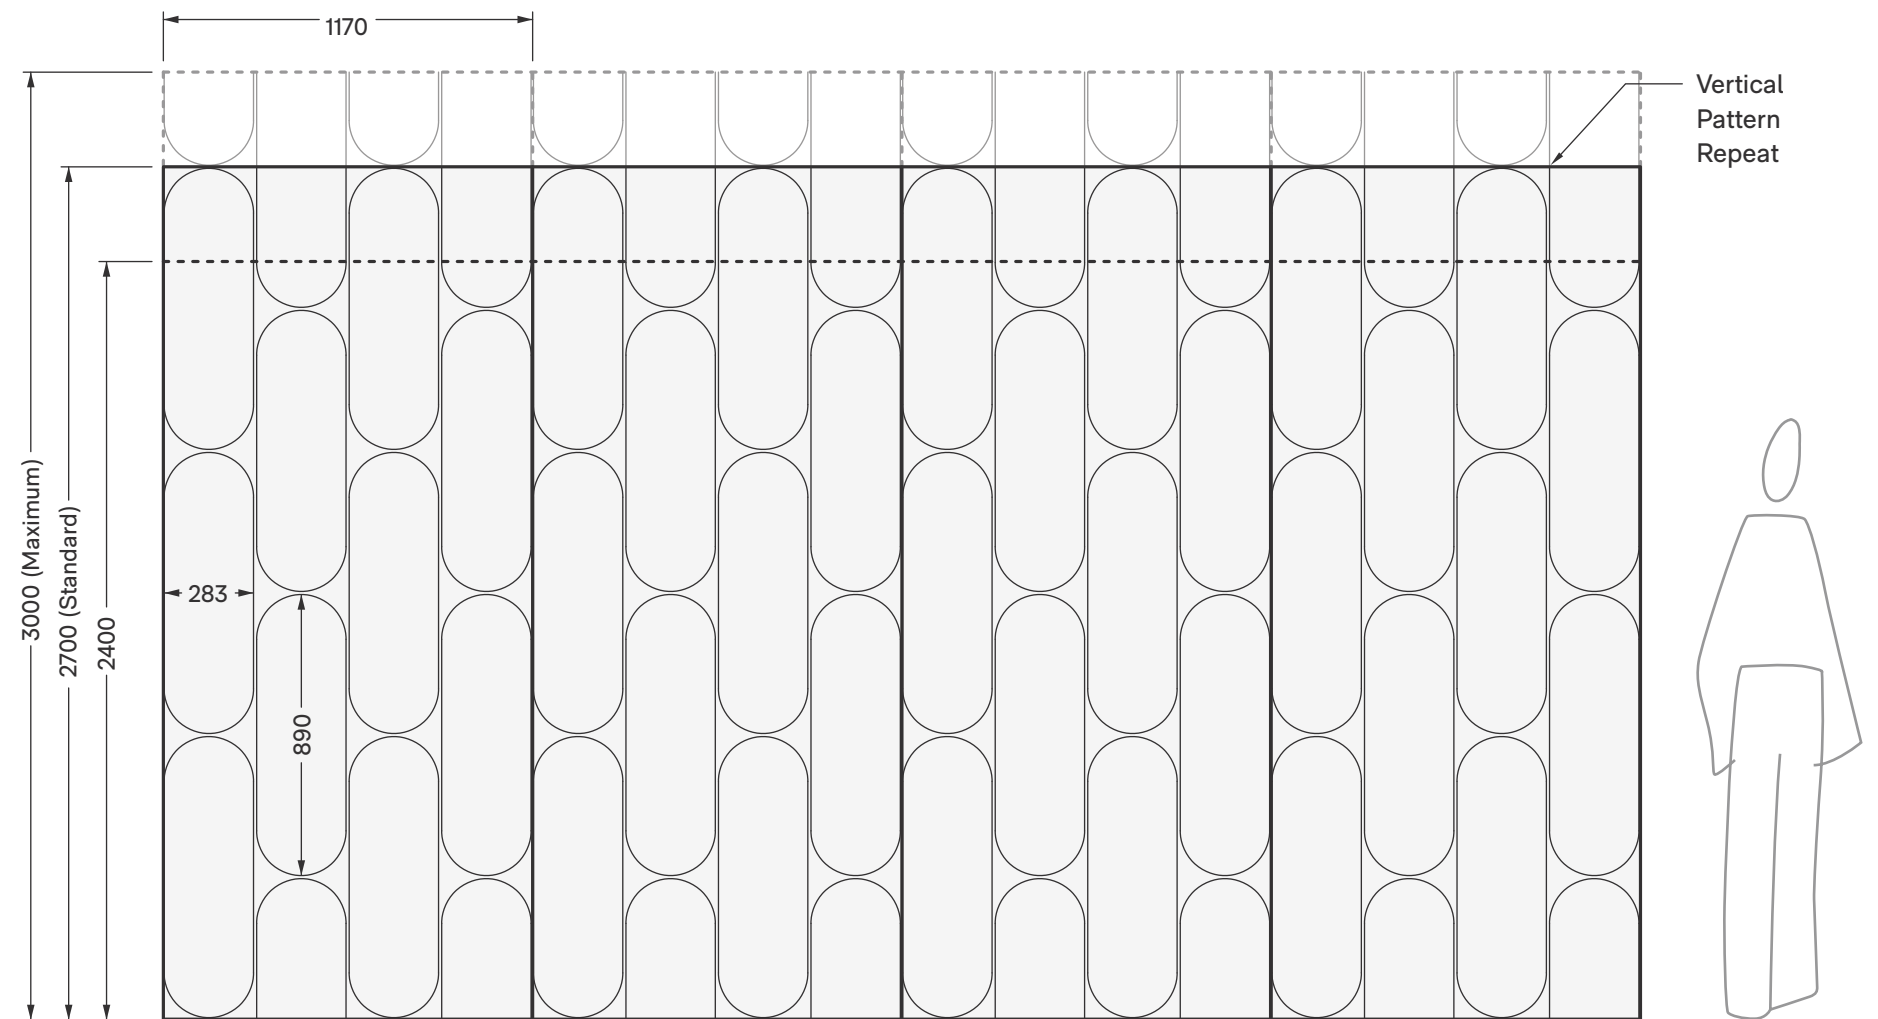




Detail Considerations


Trimming Panel

Verve panels can be cut on-site if required. For best outcome, we recommend cutting at pattern low-points. Refer to style detail page for more information.

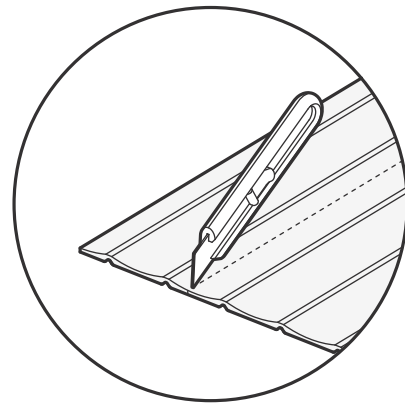

Power Outlets and Light Switches

Measure and cut out where the outlet would sit on the panel. Apply the panel to the substrate and secure the outlet through the panel.

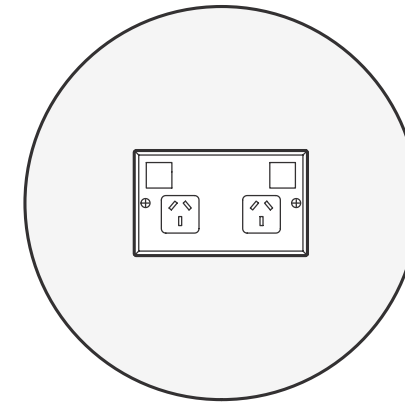



Colours

Cube™ Colours

Verve panels are available in the full range of Cube™ colours.



Pavilion



Opera



Parthenon



Senado



Beehive



Terrace



Canyon



Sargazo



Savoye



Colosseum




Rushmore



Flatiron



Cavalier




Falling Water



Muralla



Pinnacle



Acros




Highland




Gherkin




Tree House




Caspian



Herald



Empire




Petronas




Surface Finishes

Stone Finishes

Verve panels are available in stone finish for an added touch of elegance.



Carrara



Statuario




Statuario Rose




Travertine



San Pedro



Rojo Alicante



Empress Green



Fossena

Timber Grain Finishes

Verve panels are available in selected timber grain finishes for a biophilic look.



Birch



American Ash



Tasmanian Oak



Hoop Pine



Oak



Boston Oak



Natural Oak



Civic Oak



Soft Walnut



Coastal Oak



Nordic Oak



Aged Oak



Blackbutt



Black Walnut



Coffs Blackbutt



Prime Oak



Yakisugi Black



Sound Materials

We're on a positive journey towards momentous change. It's about winning for the planet and its people, making a difference for healthy generations to come.

Sustainability is ingrained in everything we do, from fibre to finish. Our commitment to doing good now and in the future drives us to continuously evolve our practices, design with integrity, and take responsibility for the impact of our products. Our five sustainability pillars reflect this ethos, guiding our actions and shaping our decisions. Together, these pillars form a system that ensures our materials, products, and processes contribute meaningfully to a more sustainable world.



01



Climate change demands climate action

We are carbon neutral in everything we do.

02



Closing the loop

We are advocates for closing the loop on waste. We design with circularity front of mind.

03



Sustainable supply chain

We carefully select responsible suppliers and take action to mitigate unethical practices, and encourage good working conditions.

04



Supporting wellbeing in buildings

All our products are made using only safe materials. No harmful chemicals are present in our products.

05



Operating a business for purpose and profit

We strive to have a positive impact on our environment, our people, and the next generation.

Credentials

Sustainability isn't just a feature—it's a foundation. Our products are independently certified by trusted third-party certifications and labels to meet rigorous environmental and performance standards.

Our products help support certification and performance outcomes under NABERS Indoor Environment, WELL, LEED, Green Star and BREEAM.



Declare.





Our Journey to Nature Positive

We want to make a material difference to the planet and its people. That's why we're not resting on achieving carbon neutrality across the organisation and our products.


We're on a journey committed to Nature Positive, which ultimately delivers systems and products that contribute to biodiversity replenishment, carbon sequestration, and many positive environmental outcomes.

It's manufacturing that cares for human beings and the generations to come.

1967
Founded in Auckland, NZ, creating underfelt for the flooring industry.




1990
Established on-line recycling systems.

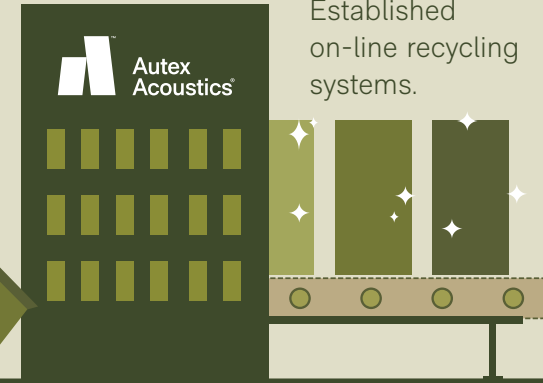


2020
Dematerialisation project, which reduced raw material use by 30% for core product.



2017
First Environmental Product Declarations (EPDs) were published and started measuring GHG emissions.



2012
Reclaimed waste trimmings, reducing raw material use and associated emissions.

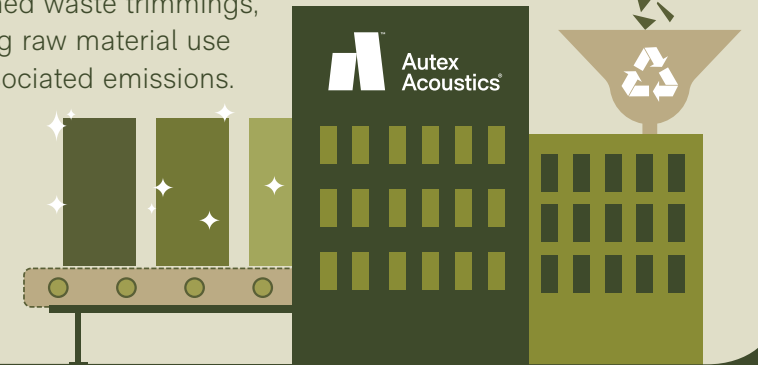

2021
We balanced all emissions from our acoustic products to zero.



2022
We balanced all emissions from our global operations to zero.



2025
We received the first NaturePositive+ Declaration in the construction industry for our first carbon negative product we launched in New Zealand. It uses a material with a -8.6 CO₂e carbon footprint.



Technical Information

Overview

NRC	0.30 - 0.80
Content	100% PET, min. 80% recycled
Form	Panel
Dimensions	1170mm x 2700mm (standard)
Thickness	12mm, 21mm
Tolerance	(-/+ 10%)
Origin	Made in Australia

Fire Considerations

AS ISO 9705 - 2003 and AS 5637.1
 Classification: Group 1
 Fire test report available on request.

Product Specifications

Hard body impact There is no surface damage or penetration when subjected to hard body impacts. When adhered to 10mm plasterboard, the system can resist a 9 joule impact.


Soft body impact There is no surface damage or penetration when subjected to soft body impacts. When adhered to 10mm plasterboard, the system can resist a 70 joule impact.

Ten Year Manufacturer's Guarantee

Acoustic Performance

Verve Contoured Panels are specifically designed to reduce and control reverberation and echo noise in building interiors.

	Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● 12mm Verve		0.00	0.05	0.10	0.40	0.70	0.80	0.30
● 12mm Verve (with 25mm air gap)		0.10	0.20	0.50	0.85	0.95	0.85	0.65
● 21mm Verve		0.05	0.20	0.55	0.90	1.00	0.90	0.65
● 21mm Verve (with 25mm air gap)		0.15	0.40	0.80	1.00	0.95	0.90	0.80

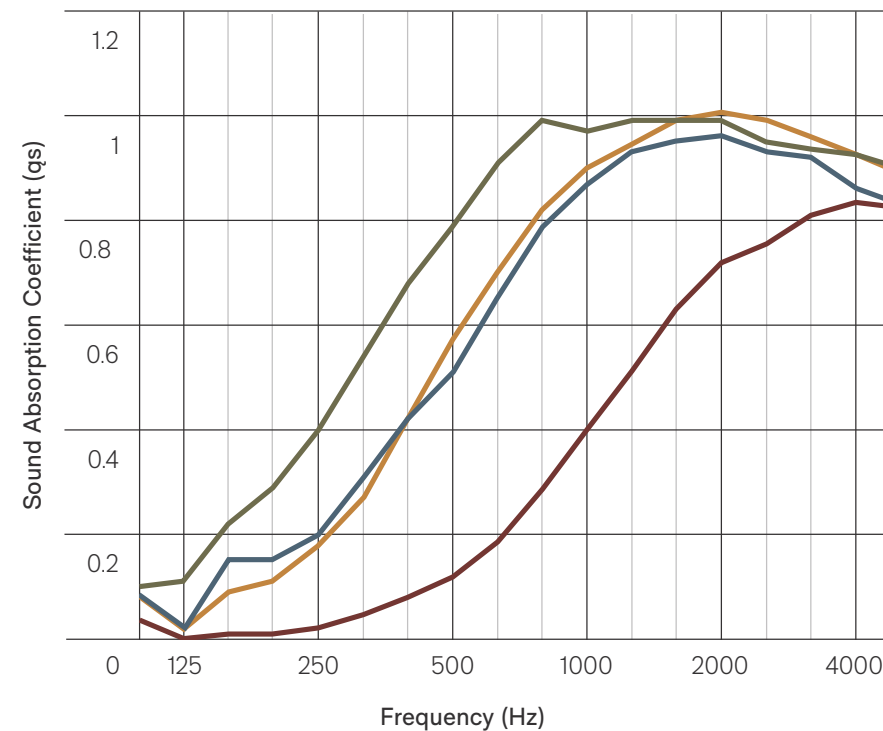

Microbial resistance (ASTM G21-15):
 Growth rating: 0

Colour fastness to light (ISO 105-B02:2014):
 Rating: 6

Determination of colourfastness to rubbing (ISO 105-X12:2016):
 Dry assessment: 4 - 5
 Wet assessment: 4 - 5

Average % of water vapour sorption by weight after four days: 0.4%

For care and maintenance guidance, view the product Care and Maintenance Guide.

